



Mapped, edited, and published by the Geological Survey

Control by USGS and NOS/NOAA

Topography by photogrammetric methods from aerial photographs taken 1972. Field checked 1973

Projection: Texas coordinate system, central zone (Lambert conformal conic)



10,000-foot grid ticks based on Texas coordinate system, central and north central zones

1000-meter Universal Transverse Mercator grid ticks, zone 15, shown in blue 1927 North American Datum

Fine red dashed lines indicate selected fence lines

Areas covered by dashed light blue pattern are subject to controlled inundation

The difference between 1927 North American Datum and North American Datum of 1983 (NAD 83) for 7.5 minute intersections is given in USGS Bulletin 1875. The NAD 83 is shown by dashed corner ticks

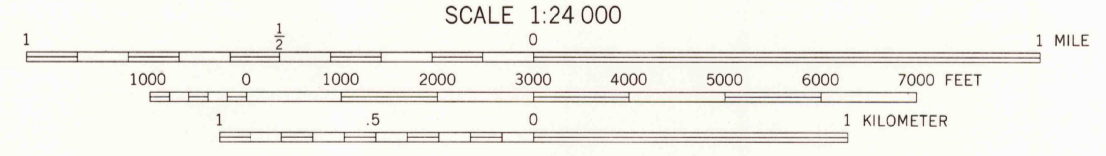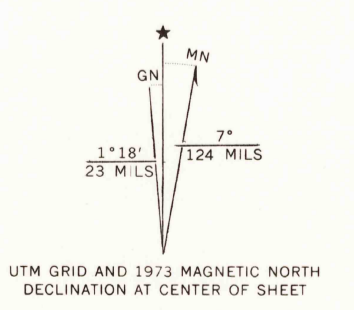


CONTOUR INTERVAL 10 FEET
CONTOUR INTERVAL 20' IN LAKE PALESTINE
NATIONAL GEODETIC VERTICAL DATUM OF 1929

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



QUADRANGLE LOCATION

ROAD CLASSIFICATION	
Primary highway, hard surface	Light-duty road, hard or improved surface
Secondary highway, hard surface	Unimproved road
Interstate Route	U.S. Route
	State Route

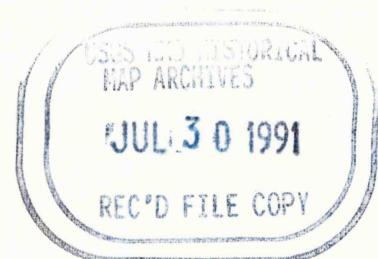

BERRYVILLE, TEX.

32095-A4-TF-024

1973

DMA 6948 III SW-SERIES V882

3295-122