Guadalupe-Blanco River Authority 933 E. Court Street Seguin, Texas 78155



WQ-Lab/Frkg-112012-102/Cap.10,000

www.gbra.org

A publication of the Guadalupe-Blanco River Authority

Nater Quality and HYDRAULC

FRACTUR

What is hydraulic fracturing?

Are you concerned about how hydraulic fracturing or "fracking" may affect the water quality of your water wells? If so, it might help you to know that such issues are being considered on the national, state, and local levels.

The first question one might ask is, "What is fracking?" Well, fracking is a process used by gas producers to stimulate wells and recover natural gas from sources such as coal beds and shale gas formations. The technique creates fractures

Are there concerns about hydraulic fracturing at the federal level?


In its Fiscal Year 2010 budget report, the U.S. House of Representatives Appropriation Conference Committee identified the need for a focused study of this topic. Environmental Protection Agency (EPA) scientists, at the direction of Congress, are undertaking a study of the practice to better understand potential impacts of hydraulic fracturing on drinking water and groundwater. The EPA consulted with experts in the field through peer review, and technical workshops and engaged stakeholders in a dialogue about the study through facilitated public meetings. The EPA finalized the study plan on Nov. 2011 (Plan to Study the Potential Impacts of Hydraulic Fracturing on Drinking Water Resources EPA/600/R-11/122). Initial research results will be evaluated with an EPA goal of producing a report in 2014. For more information, visit: www.epa.gov.

Well

Casing

that extend from a well bore into rock or coal formations. These fractures allow the oil or gas to travel more easily from the rock pores, where the oil or gas is trapped, to the production well. To create fractures, a mixture of water, proppants (sand or ceramic beads) and chemicals is pumped into the rock or coal formation. The chemicals used in this process are what pose the potential problem. A variety of chemicals make up the proppants.

> A mixture of sand, water and chemicals are injected into the well at high pressures. Generally wells are drilled thousands of feet deep, below the water table.

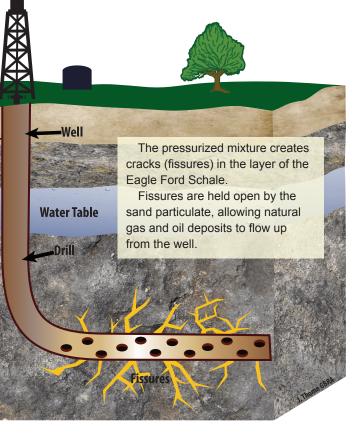

What is GBRA's stance?

GBRA's 10-county statutory district intersects with a significant portion of the Eagle Ford Shale Formation. This sedimentary rock formation underlies much of South and East Texas and is one of the most actively drilled targets for oil and gas in the United States. GBRA is taking an observe-andmonitor approach to Eagle Ford Shale hydraulic fracturing activities within its basin. As rules and regulations are promulgated, GBRA will adjust its internal processes and services accordingly.

More information about hydraulic fracturing can be found on the following websites:

- http://www.fe.doe.gov/programs/oilgas/index.html
- http://www.netl.doe.gov/technologies/oil-gas/ index.html
- http://www.netl.doe.gov/kmd/Forms/Search.aspx
- http://ead.anl.gov/index.cfm
- http://www1.eere.energy.gov/geothermal/
- http://fracfocus.org

How is the state addressing the issue?

The State of Texas Legislature sent a bill to Governor Rick Perry requiring the Texas Rail Road Commission (RRC) to complete the rulemaking process that would require disclosure of hazardous chemicals used in the hydraulic fracturing processes. The bill also requires the RRC to complete rulemaking for all chemicals used in the process by July 1, 2013. The RRC and Texas Commission on Environmental Quality (TCEQ) already have regulations in place for groundwater protection. For more information, visit the websites of the RRC and the TCEQ. For updates to the Hydraulic Fracturing Chemical Disclosure Requirements refer to the following link: (Chapter 3 section 3.29) www.rrc.state.tx.us/rules/rule.php.

What substances or compounds could be of concern?

According to the EPA's Plan to Study the Potential Impacts of Hydraulic Fracturing on Drinking Water Resources (EPA/600/R-11/122) November 2011, there are over 1,000 potential chemicals identified in the hydraulic fluid and flowback/produced water processes.

2.2-Dibromo-3-Nitriloproplonamide 2-butoxyethanol 2-methyl-4-isothlazolin-3-one 5-chloro-2-methyl-4-isothlazotin-3-one Acetic Acid Acetic Anhydride Alphatic Acid Alphatic Alcohol Ammonia Persulfate Aromatic Hydrocarbon Mesh Sand Aromatic Ketones Boric Acid Boric Oxide Butan 1-01 Chlorides Citric Acid Conductivity Cristobalite Polyethoxylated Alkanol (1) **Crystalline Silica** Dazomet Dazomet Polyethylene Glycol Mixture **Diatomaceus Earth**


Diesel (use discontinued) Ethane-1, 2-diol Ether Ethoxlated Alcohol Prop-2-yn-1-01 Ethoxylated Alcohol Ethoxylated Alcohol Propan-2-01 Ethoxylated Octylphenol Ethylene Glycol Ethvlhexanol Ferrous Sulfate Heptahydrate Formaldehvde Gas Organics and Diesel Organics Glutaraldehvde **Glycol Ethers** Guar Gum Hemicellulase Enzyme Hvdrochloric Acid Hydrogen Sulfide Hvdrotreated light distillate Isopropanol Isopropyl Alcohol Magnesium Nitrate

Mesh Sand (Crystalline Silica) Methanol Mineral Spirits Monoethanolamine Monoethanolamine Oil and Grease Petroleum Distillate Blend Polyethoxylated Alkanol (2) Polvethylene Glycol Mixture Polyglycol Polysaccharide Polysaccharide Potassium Carbonate Potassium Hydroxide Propargyl Alcohol Propylene Sodium Bicarbonate Sodium Chloride Sodium Hydroxide Sucrose Tetramethylammonium Chloride Volatile Organic Compounds


What can you do?



While hydraulic fracturing wells tend to be drilled significantly deeper than groundwater wells for human and livestock consumption, some landowners may feel compelled to be more proactive in monitoring their groundwater. The GBRA's TNI (The NELAP Institute) accredited Regional Laboratory can be a resource in the effort to analyze and produce water quality data of groundwater that does not have an established "baseline" for specific well sites on or near the



The American Water Works Association (AWWA) list of "potential hydrofracking chemicals" taken from its Opflow Magazine July 2011 issue includes a reference list. In an attempt to condense the numerous compounds identified in the fluids from both the hydraulic fracturing process and the flowback-produced water, the following is a list (see "Laboratory Testing Fees" next panel) recommended by GBRA Regional Laboratory staff to provide a baseline for drinking water wells or wells that will be used in the hydraulic fracturing process.







Laboratory Testing Fees:

Alkalinity\$23
Bromide*\$44
Chlorides
Conductivity\$12
Fluoride\$26
Hardness
Heavy metals* (13 at \$25/each)\$325
(Ar, Ba,B,Cd,Ca,Fe,Pb,Mg,Mn,K,Na,Se,Ag)
Hydrogen sulfide-H2S*\$60
Mercury*\$45
Methane and Ethane* (dissolved) \$150
Nitrate-nitrogen\$26
Oil and Grease (EPA 1664 Rev. B)\$58
pH
Sulfate\$22
Total Chromium
Total Coliform
Total Dissolved Solids\$24
Total Petroleum Hydrocarbons-TPHs*\$98
Uranium*
Volatile Organic Compounds-VOC's*\$185
*subcontracted
Hydraulic Fracturing Individual Price: \$1,668
Hydraulic Fracturing Discount Package: \$1,400
Volume discounts are also available.

To obtain additional information about the hydraulic fracturing discount testing package, please contact the GBRA Regional Laboratory.

Regional Laboratory

933 E. Court St. Seguin, TX 78155 (800) 413-4130 email: lab@gbra.org www.gbra.org