TEXAS
WATER
DEVELOPMENT
BOARD





Report 136

## GROUND-WATER RESOURCES OF MONTGOMERY COUNTY, TEXAS



#### TEXAS WATER DEVELOPMENT BOARD

#### REPORT 136

# GROUND-WATER RESOURCES OF MONTGOMERY COUNTY, TEXAS

Ву

Barney P. Popkin United States Geological Survey

Prepared by the U.S. Geological Survey in cooperation with the Texas Water Development Board Montgomery County Commissioners Court San Jacinto River Authority and the City of Conroe

#### TEXAS WATER DEVELOPMENT BOARD

W. E. Tinsley, Chairman Robert B. Gilmore Milton T. Potts Marvin Shurbet, Vice Chairman John H. McCoy Carl Illig

Harry P. Burleigh, Executive Director

Authorization for use or reproduction of any material contained in this publication, i.e., not obtained from other sources, is freely granted without the necessity of securing permission therefor. The Board would appreciate acknowledgement of the source of original material so utilized.

Published and distributed by the Texas Water Development Board Post Office Box 13087 Austin, Texas 78711

### TABLE OF CONTENTS

	Page					
ABSTRACT	1					
INTRODUCTION						
Location and Extent of the Area	3					
Purpose and Scope of the Investigation	3					
Previous Investigations	3					
Methods of Investigation	4					
Well-Numbering System	4					
Acknowledgments	4					
Population and Economy of the Area	4					
Physiography and Drainage	8					
Climate	8					
GROUND-WATER HYDROLOGY	9					
General Geology	9					
Source and Occurrence of Ground Water	9					
Hydrologic Units	11					
Catahoula Sandstone	11					
Lower Part of the Jasper Aquifer	11					
Upper Part of the Jasper Aquifer	15					
Burkeville Aquiclude	15					
Evangeline Aquifer	15					
Chicot Aquifer	15					
Hydraulic Properties of the Aquifers	15					
Recharge, Movement, and Discharge of Ground Water	30					
CHEMICAL QUALITY OF GROUND WATER	30					
Relationship of Quality of Water to Use	32					
Water Quality in the Hydrologic Units	34					

### TABLE OF CONTENTS (Cont'd.)

		raye
	Catahoula Sandstone	34
	Lower Part of the Jasper Aquifer	34
	Upper Part of the Jasper Aquifer	34
	Burkeville Aquiclude	34
	Evangeline Aquifer	34
	Chicot Aquifer	35
	Water-Quality Problems	35
	Disposal of Oil-Field Brines	35
	Protection of Water Quality in Oil-Field Drilling Operations	35
DEV	/ELOPMENT OF GROUND WATER	35
	Use of Ground Water	35
	Water-Level Declines and Land-Surface Subsidence	37
	Well Construction	38
AVA	AILABILITY OF GROUND WATER	49
NEE	D FOR FUTURE STUDIES	51
REF	FERENCES CITED	53
	TABLES	
1.	Well Numbers Used in This Report and Corresponding Numbers Used in Older Reports	5
2.	Hydrogeologic Units Used in This Report and in Reports on Adjacent Counties	10
		10
3.	Characteristics of the Hydrologic Units in Montgomery County	12
4.	Summary of Aquifer Tests in the Upper Part of the  Jasper Aquifer in Montgomery and Adjacent Counties	31
5.	Source and Significance of Dissolved-Mineral Constituents and Properties of Water	33
6.	Estimated Use of Ground Water in Montgomery County, 1966	38
7.	Records of Wells in Montgomery and Adjacent Counties	55
8.	Drillers' Logs of Wells in Montgomery and Adjacent Counties	82
9.	Water Levels in Wells in Montgomery and Adjacent Counties	107

### TABLE OF CONTENTS (Cont'd.)

		Page
10.	Chemical Analyses of Water From Wells in Montgomery and Adjacent Counties	118
11.	Field Analyses of Water From Wells in Montgomery and Adjacent Counties	125
	FIGURES	
1.	Map Showing Location of Montgomery County	3
2.	Graph Showing Annual Precipitation at Conroe, 1931-66	8
3.	Graph Showing Average Monthly Precipitation at Conroe, 1931-66	9
4.	Graph Showing Average Monthly Temperature at Conroe, 1931-66	9
5.	Photograph of Well TS-60-53-502, the Largest Capacity Flowing Well in Montgomery County	11
6.	Map Showing the Approximate Altitude of the Base of the Catahoula Sandstone	13
7.	Map Showing the Approximate Altitude of the Base of the Lower Part of the Jasper Aquifer and Base of the Sand Containing Fresh Water in the Aquifer	17
8.	Map Showing the Approximate Altitude of the Base of the Lower Part of the Jasper Aquifer and Base of the Sand Containing Slightly Saline Water in the Aquifer	19
9.	Map Showing the Approximate Altitude of the Base of the Upper Part of the Jasper Aquifer and Areas Where Slightly Saline Water is Present in the Aquifer	21
10.	Map Showing the Approximate Altitude of the Base of the Burkeville Aquiclude	23
11.	Map Showing the Approximate Altitude of the Base of the Evangeline Aquifer and the Thickness of Fresh Water-Bearing Sands in the Chicot and Evangeline Aquifers	25
12.	Map Showing the Approximate Altitude of the Base of the Chicot Aquifer and the Approximate Altitude of Water Levels in Wells Screened in the Aquifer, 1966-67	27
13.	Graph Showing Relation of Drawdown to Transmissibility and Distance	29
14.	Photograph Showing a Comparison of New and Corroded Check Valves	36
15.	Graph Showing Comparison Between Depth of Sands Containing Fresh to Slightly Saline Water and the Depth of Protection Required in Oil Fields in Montgomery County	37
16.	Hydrographs of Water Levels in Wells Tapping the Upper Part of the Jasper Aquifer at Conroe	39
17.	Map Showing the Approximate Altitude of Water Levels in Wells Screened in the Upper Part of the Jasper Aquifer, 1966-67	41
18.	Map Showing Approximate Altitude of Water Levels in Wells Screened in the Evangeline Aquifer, 1942-43	43
19.	Map Showing Approximate Altitude of Water Levels in Wells Screened in the Evangeline Aquifer, 1966-67	45

### TABLE OF CONTENTS (Cont'd.)

		Page
20.	Hydrograph of Selected Water Levels in a Well Tapping the Chicot Aquifer at Conroe	47
21.	Map Showing the Approximate Altitude of the Base of Fresh Water in the Report Area	133
22.	Map Showing the Approximate Thickness of Fresh Water-Bearing Sands Below the Burkeville Aquiclude	135
23.	Map Showing the Approximate Altitude of the Base of Slightly Saline Water in the Report Area	137
24.	Map Showing the Approximate Thickness of Fresh to Slightly Saline Water-Bearing Sands Below the Burkeville Aquiclude	139
25.	Hydrogeologic Map Showing Location of Wells in Montgomery and Adjacent Counties	141
26.	Hydrologic Section A-A'	143
27.	Hydrologic Section B-B', Harris and Montgomery Counties	145
28.	Hydrologic Section C-C', Walker, Montgomery, and Harris Counties	147
29.	Hydrologic Section D-D', Montgomery and Harris Counties	149

# GROUND-WATER RESOURCES OF MONTGOMERY COUNTY, TEXAS


#### **ABSTRACT**

Ground water in Montgomery County is contained in sands of the Catahoula Sandstone, lower part of the Jasper aquifer, upper part of the Jasper aquifer, Burkeville aquiclude, Evangeline aquifer, and Chicot aquifer. The Chicot, Evangeline, and upper part of the Jasper generally contain fresh water throughout the county. The Catahoula Sandstone and lower part of the Jasper contain fresh and slightly saline water in the northern and central parts of the county. The Evangeline transmits about 10 mgd (million gallons per day) and the upper part of the Jasper transmits about 3.5 mgd. The quality of water in the aquifers is good and can be used for most purposes.

The ground-water resources of the county are practically untapped. In 1966, about 6.2 mgd of ground water was used for all purposes. The principal uses,

about 2.6 mgd, were for rural domestic and livestock supplies. Almost all of the water was obtained from the Evangeline and the upper part of the Jasper.

About 80 million acre-feet of fresh ground water is in storage in Montgomery County. However, most of this water cannot be economically produced. Calculations based on the transmission capacity of the Evangeline and upper part of the Jasper indicate that about 65 mgd could be obtained with pumping levels not exceeding 400 feet along an assumed line of discharge in the latitude of Conroe. Probably as much as 150 mgd could be pumped with only moderate water-level declines and land-surface subsidence. If the rejected recharge in the outcrop areas were salvaged, an additional 140,000 acre-feet per year (125 mgd) of water would be available.

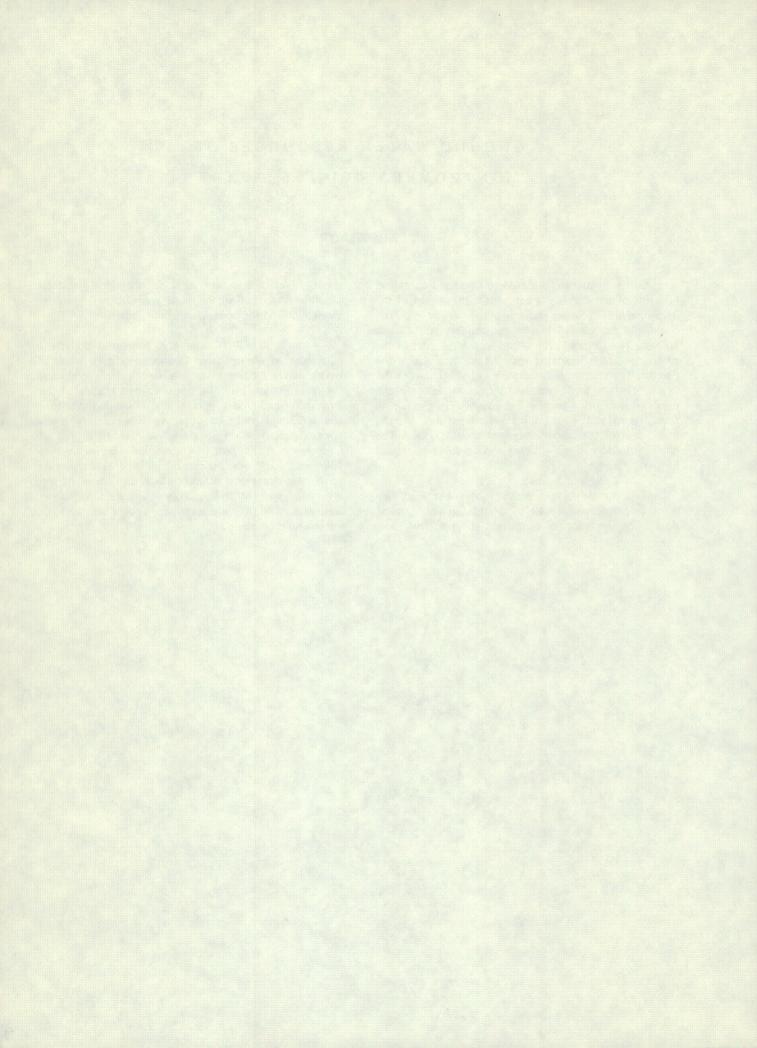

# GROUND-WATER RESOURCES OF MONTGOMERY COUNTY, TEXAS

#### INTRODUCTION

#### Location and Extent of the Area

Montgomery County is in southeastern Texas in the West Gulf Coastal Plain physiographic province (Fenneman, 1938). It is bordered by Walker County on the north, San Jacinto and Liberty Counties on the east, Harris County on the south, and Waller and Grimes Counties on the west. Peach Creek is the boundary with San Jacinto County, and Spring Creek forms most of the boundary with Harris County. Montgomery County, which is adjacent to the Houston metropolitan area, has an area of 1,090 square miles (Figure 1).

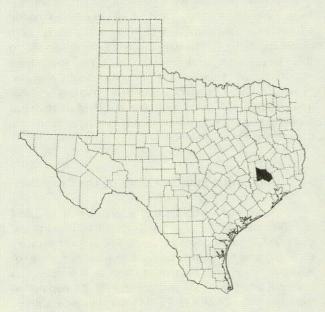


Figure 1.-Location of Montgomery County

#### Purpose and Scope of the Investigation

The Montgomery County ground-water investigation was started in May 1966 as a cooperative project of the Texas Water Development Board, the San Jacinto River Authority, the Montgomery County Commissioners Court, the city of Conroe, and the U.S. Geological Survey. Its purpose was to determine the occurrence, quality, and quantity of the ground-water resources of Montgomery County and to describe the

availability and dependability of sources of water suitable for municipal supply, industrial use, and irrigation. A related purpose was to determine areas of present or potential ground-water pollution.

The study included a determination of: (1) the extent and location of sands containing fresh water (dissolved solids less than 1,000 milligrams per liter) and slightly saline water (dissolved solids of 1,000 to 3,000 milligrams per liter); (2) the quantity of ground water pumped and the effect of pumping on water levels; (3) the hydraulic characteristics of the aquifers; and (4) the quantity of ground water available for development.

#### **Previous Investigations**

The first investigation of the ground-water resources of Montgomery County was that of Taylor (1907), who discussed briefly the railroad wells at Dobbin and Conroe. Deussen (1914) discussed the geology and ground-water resources of the county in more detail. Both reports contained records of wells, drillers' logs, and chemical analyses of water samples.

Livingston (1939) inventoried 56 wells in Montgomery County and published chemical analyses and drillers' logs. Rose (1943) described 138 wells and published chemical analyses, drillers' logs, and columnar sections of sands.

Wood (1956) and Wood, Gabrysch, and Marvin (1963) discussed the ground-water supplies potentially available from the principal water-bearing units in the Gulf Coast region of Texas, including Montgomery County. Wood and Gabrysch (1965) discussed the hydrology of the Houston district, including parts of Montgomery County. Measurements of water levels in wells in Montgomery County have been made since 1931 as part of the observation-well program in Texas. Records of these measurements have been published by the Texas Water Development Board and the U.S. Geological Survey (see Rayner, 1959; Sayre, 1957; and Hackett, 1962).

#### Methods of Investigation

The investigation of the ground-water resources of Montgomery County included an inventory of 497 wells in the county and 81 wells in adjacent counties, including all industrial, public supply, and irrigation wells, and a representative number of livestock and domestic wells (Table 7).

Figure 25 shows the location of inventoried wells and test holes. Electrical logs of test holes were used to correlate and evaluate the subsurface characteristics of the water-bearing sands. Drillers' logs (Table 8), electrical logs of selected test holes, and analyses of samples of water collected from a large number of wells (Table 10) were used to determine the chemical quality of the water and the total thickness of sands containing fresh to slightly saline water.

Field analyses of water from selected wells were made to determine pH at the time of sampling (Table 11). Pumping test data (Table 4) were collected to determine the hydraulic characteristics of the fresh water-bearing sands. Measurements of water levels in wells and records of past measurements were used to determine the effects of pumping. Pumpage of ground water for municipal supply, industrial use, and irrigation was inventoried. Elevations of water wells were determined from U.S. Geological Survey topographic maps. Climatological records and streamflow records were collected and analyzed.

#### **Well-Numbering System**

The well-numbering system used in this report is a statewide system adopted by the Texas Water Development Board.

A 2-letter prefix to the well number is used to identify each county. The prefix assigned to Montgomery County is TS. Prefixes assigned to adjacent counties are:

COUNTY	PREFIX	COUNTY	PREFIX
Grimes	KW	San Jacinto	wu
Harris	LJ	Walker	YU
Liberty	SB	Waller	YW

Under this system, each one-degree quadrangle in the State is given a number consisting of two digits from 01 to 89. These are the first two digits in the well number. The one-degree quadrangles are divided into 7½-minute quadrangles which are given two-digit numbers from 01 to 64. These are the third and fourth digits of the well number. Each 7½-minute quadrangle is subdivided into 2½-minute quadrangles which are given a single digit number from 1 to 9. This is the fifth digit of

the well number. Each well within a  $2\frac{1}{2}$ -minute quadrangle is given a two-digit number in the order in which it is inventoried, starting with 01. These are the last two digits of the well number.

All of Montgomery County is within the 1-degree quadrangle 60. The second two digits are shown in the upper left corner of each 7½-minute quadrangle on the well location map (Figure 23); the last three digits appear at the well location.

In order to facilitate the use of well data from other reports, the previously inventoried wells were assigned new State numbers. The old and new numbers are cross-referenced in Table 1.

#### Acknowledgments

The author acknowledges the assistance of those who contributed data and helped with the preparation of this report. Particular thanks are due the officials of Humble Oil and Refining Company; Texaco, Incorporated; Tennessee Gas and Transmission Company; and the City of Conroe for their assistance in supplying records of their wells and oil and gas tests.

Drillers of water wells generously supplied drillers' logs, electrical logs, and well-completion data. Layne-Texas Company and Con-Tex Water Wells were especially helpful. Property owners granted access to their lands, wells, and records. The active and retired employees of Humble Oil and Refining Company, Superior Oil Company, Sun Oil Company, and Tidewater Oil Company gave generous field assistance in locating many of the old flowing water wells in the Conroe and Lake Creek oil fields.

#### Population and Economy of the Area

Montgomery County had a population of 2,384 in 1850. By 1900, the population had increased to 17,067. The oil boom in the 1930's did not substantially increase the county population because the city of Humble, in Harris County, served as the operation headquarters. During the period 1950-70, the population increased from 24,504 to 46,950. Conroe, with a population of 10,931 in 1970, is the county seat. Willis, Montgomery, and Cut and Shoot are among the smaller communities.

The county serves as a recreational center for much of the Houston area. The Sam Houston National Forest, the W. Goodrich Jones State Forest, the Boy Scout camp (Camp Strake), and numerous lakes, camps, and country clubs are integral parts of the county's recreational facilities. Lake Conroe, the 32.8 square-mile lake under construction on the West Fork San Jacinto River, will add to these facilities.

Table 1.—Well Numbers Used in This Report and Corresponding Numbers Used in Older Reports

#### **Montgomery County**

ROSE 1943	LIVINGSTON 1939	RAYNER 1959	SAYRE 1957	HACKETT 1962	DEUSSEN 1914	THIS REPORT
2		4 4	- L		2 Table 1	TS-60-34-602
3	2	- T	-			60-42-306
4	-				LT.	60-42-304
5 6	5				784	60-42-305
						60-42-303
7	3		_		783	60-42-307
8					_	60-42-809
9						60-35-804
10						60-35-805
11						60-35-806
12			_			60-43-201
13			_			60-35-901
14				_		60-36-502
15	6		-	-		60-36-401
	16	16	-			60-45-106
20						
21						60-37-408 60-37-102
22	22	22	22			60-45-505
23			_	_		60-36-302
24			-		_	60-29-701
00						
26 27				- 1		60-37-303
28		_			7.	60-37-302
29	29	29	29	29		60-37-301 60-45-803
<u> </u>		30			- 45	60-45-801
31			-			60-37-503
36 43		144	_	36 —		60-37-401
44			_			60-44-402 60-44-403
45	45	45				60-53-503
46 47	46	46	46	46	-0.00	60-53-504
48		3	Z A			60-44-501
49		_	E	_	I I	60-44-502 60-44-601
50			-		-	60-44-602
51 53				-		60-45-403
54	21	A D		_	- 790	60-45-510
55				Ξ	790	60-45-506 60-45-502
56	23	145	_	56		60-45-504
57 59	24	57	57	_		60-45-104
60	28					60-45-511
61	-					60-45-408 60-45-401
63		_	12			60-45-611
64		-	-			60-45-609
68 69	The I		-	_	7.0	60-47-608
70				. 2	- 781	60-47-607 60-47-606
71		-1	121		-	60-47-605
						03 47 003
72	+		-	— — — — — — — — — — — — — — — — — — —		60-54-201
73 74			-	-	-	60-54-103
75	I I					60-46-801
81				I I	I I I	60-46-709 60-45-903
						00-40-503
83	NT P	-	-	-		60-46-706
85 86		-	_		-	60-53-308
88		_	Ξ	1		60-53-309 60-53-601
89		_		_		60-53-304
						30 33 334

Table 1.—Well Numbers Used in This Report and Corresponding Numbers Used in Older Reports—Continued

ROSE 1943	LIVINGSTON 1939	RAYNER 1959	SAYRE 1957	HACKETT 1962	DEUSSEN 1914	THIS REPORT
90						TS-60-53-305
91			10.4			60-53-306
92			The same of			60-53-307
93	-					60-53-303
94	35			7-1009		60-53-201
95						60-45-706
96			10/2		40 400	60-45-702
98						60-44-801
99						60-52-106
101		Fig. 19 1 <del>5</del> April 14				60-52-101
400						CO FO 404
102 104						60-52-104 60-51-306
105	That I'm at I'm	1 12				60-51-302
110	41					60-50-302
111		2 A				60-50-605
112						60-50-606
113		-	-			60-51-403
114		7.1				60-51-401
115						60-51-502 60-51-901
116						60-51-901
117						60-51-905
118		2				60-52-403
121	54					60-61-206
122	50		-			60-53-706
123	47					60-53-806
404	40					60-53-502
124	48					60-53-502
125 129	49 —					60-54-603
131						60-55-301
132						60-55-505
133						60-55-805
134						60-55-701 60-62-601
139	56	140	140	140		60-45-107
		141	-	-		60-45-409
_	- 1	142				60-35-201
		143				60-35-202
		146				60-45-108
	8					60-37-704 60-45-408
	28					00-45-406
	30			_9 7		60-45-801
_	42					60-52-204
			Grimes Coun	tv		
			Grillies Court	Ly		
CROMACK 1943			TURNER 1939			THIS REPORT
						KW-60-18-701
36						60-26-205
51 64						60-26-702
65						60-26-703
66						60-26-704
67						60-26-705 60-26-706
68						60-26-706 60-34-101
194						60-34-801
206 205						60-42-101
203						
209						60-42-502
210			# (a) 1 m			60-42-103
216						60-42-702
217			-			60-42-801 60-42-802
218			Maria Tim			00-42-002

Table 1.—Well Numbers Used in This Report and Corresponding Numbers Used in Older Reports—Continued

#### Harris County

WHITE AND OTHERS	LIVINGSTON AND TURNER	
1944	1939	THIS REPORT
93	93	LJ-60-61-504
298	A Property of the Contract of	65-06-305
	Walker County	
WINSLOW		
1950		THIS REPORT
1-34		YU-60-26-201
J-18		60-27-601
J-19		60-28-401
K-11		60-29-705
K-18		60-29-803
L- 6		60-29-902
	Waller County	
FLUELLEN		
1952		THIS REPORT
D-14		YW-60-58-203

Montgomery County derives its income principally from the petroleum and timber industries. Farming, dairying, gravel production, and beef cattle production also contribute to the economy of the area. The discovery of oil near Conroe in 1931 was the beginning of large-scale oil production. Over 400 million barrels of oil were produced in the county prior to 1966. Consequently, petrochemical industries and refineries have been established.

#### Physiography and Drainage

The topographic surfaces vary from almost flat near the larger streams and in the southern part of the county to hilly in the northern part. Altitudes range from about 45 feet above mean sea level in the southeastern corner of the county to about 440 feet in the northwestern corner.

The county is in the San Jacinto River drainage basin in which the primary drainage trends from northwest to southeast. The larger streams are the West Fork San Jacinto River, Peach, Spring, Stewart, and Caney Creeks. Secondary drainage which is roughly west to east is principally by Lake and Spring Creeks. The primary drainage is controlled by the southeasterly slope of the land surface while the secondary drainage is controlled to a large extent by the occurrence of alternating outcrops of sand and clay.

West Fork San Jacinto River has a stream gradient of about 5 feet per mile in the northern part of the county and about 3 feet per mile in the central and southern parts. Caney Creek has a gradient of 8 to 12 feet per mile in the northern part of the county and about 5 feet per mile in the central and southern parts. Spring Creek has a gradient of about 5 feet per mile in the southwestern part of the county and about 3 feet per mile in the southeastern part.

#### Climate

Montgomery County has a warm humid climate. Precipitation averages about 47 inches annually (Figures 2 and 3). Droughts occur infrequently and generally are not prolonged. The average annual gross lake surface evaporation rate from 1940 through 1965 was 49.5 inches (Kane, 1967).

The average annual temperature at Conroe (Figure 4) is about 20°C (68°F). Temperatures below freezing occur on the average of only 22 days per year; temperatures above 38°C (100°F) are unusual. The mean date for the first frost is November 30; the mean date for the last frost is March 7. The county has a growing season of about 268 days.

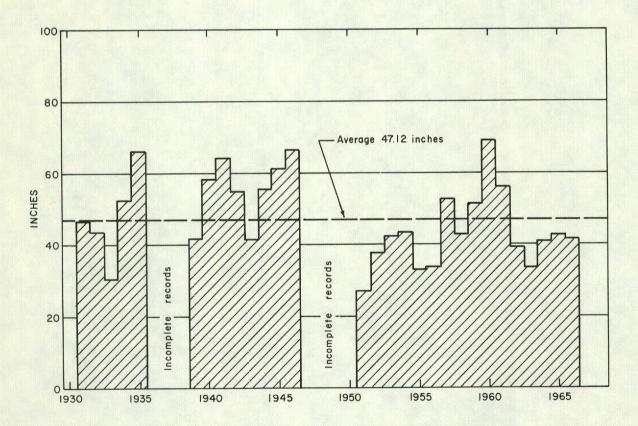


Figure 2.-Annual Precipitation at Conroe, 1931-66

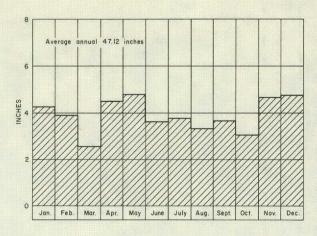


Figure 3.—Average Monthly Precipitation at Conroe, 1931-66

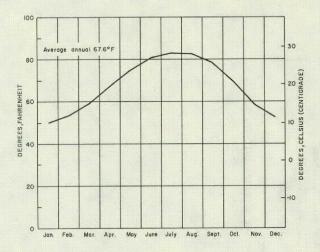


Figure 4.—Average Monthly Temperature at Conroe, 1931-66

#### **GROUND-WATER HYDROLOGY**

#### General Geology

The geologic units that contain fresh to slightly saline water in Montgomery County are, from oldest to youngest: the Catahoula Sandstone of Miocene age; the Fleming Formation of Miocene age; the Goliad Sand of Pliocene age; the Willis Sand of Pliocene(?) age; the Bentley Formation, Montgomery Formation, and Beaumont Clay of Pleistocene age; and the alluvium of Holocene age (Table 2). These units consist of alternating beds of sand and clay with minor amounts of gravel. Local occurrences of limestone are reported in some drillers' logs.

Except for the Catahoula Sandstone and most of the Goliad Sand, all of these geologic units are exposed within the county. The Catahoula crops out north of Montgomery County. The Goliad Sand of Pliocene age, which dips at a rate of 40 feet per mile, is overlapped by the Willis Sand of Pliocene(?) age, which dips at a rate of 10 feet per mile; consequently, the Goliad is exposed only in the deeper stream valleys. The units crop out in belts that are approximately parallel to the coast. The younger units, which crop out nearer the coast, form a plain composed of remnants of terraces; the older units, which crop out farther inland at higher elevations, form cuestas or sand hills.

The formations dip toward the Gulf at an angle greater than the slope of the land surface, and the dip increases with depth. For example, the base of the Catahoula Sandstone dips about 90 feet per mile while the base of the Willis Sand dips about 10 feet per mile. Intermediate beds dip at rates ranging from 85 to 40 feet per mile.

The major structural features are the deep-seated Conroe Dome and the northern flanks of the highly faulted, deep-seated Tomball Dome and the Piercement Humble Dome, which are mostly in adjacent Harris County. These domes cause a flattening of the regional dip and thinning of the overlying water-bearing units.

More detailed discussions of the geology of the area can be found in the publications of Deussen (1914), Sellards, Adkins, and Plummer (1932), Doering (1935), Michaux and Buck (1936), Fisk (1940), Metcalf (1940), Weeks (1945), Bernard, LeBlanc, and Major (1962), and Bernard and LeBlanc (1965a and 1965b). Table 2 correlates the geologic units and the hydrologic units used in this and other reports. Montgomery County is included in the Beaumont sheet of the Geologic Atlas of Texas (Bureau Economic Geology, 1968).

#### Source and Occurrence of Ground Water

The principal source of ground water in Montgomery County is rainfall within the county and in adjoining areas to the north. Most precipitation runs off, evaporates, or is transpired by plants. Only a small part of it percolates through the soil and into the underlying rocks.

Ground water in Montgomery County occurs under two conditions—water-table and artesian. Water-table conditions exist where the water is under atmospheric pressure only and the water table is free to rise or fall in response to changes in the volume of water stored. Water-table conditions occur in the outcrop areas of the water-bearing rocks.

Artesian conditions exist where an aquifer, or water-bearing unit, is overlain by a less permeable bed that confines the water under hydrostatic pressure. Artesian conditions occur downdip from the outcrops of the aquifers. Under these conditions, water in wells will rise above the top of the aquifer. If the pressure head is

Table 2. -- Hydrogeologic Units Used in This Report and in Reports on Adjacent Counties

н	YDROGEOLOGIC UNITS US	ED IN OTHER REPORTS			UN	ITS USED IN THIS REPORT		
Walker County, Jinslow (1950, plate 2)	Houston District, Lang and Winslow (1950, plate 1)	Houston District, Wood and Gabrysch (1965, figure 3)	San Jacinto County, Sandeen (1968)	System	Series	Geologic Unit	Hydrologic Unit	
			Alluvium		Holocene	Alluvium		
	Beaumont Clay and Alta Loma Sand	Beaumont Clay and Alta Loma Sand	Chicot aquifer	Quaternary	Pleistocene	Beaumont Clay Montgomery Formation Bentley Formation	Chicot aquifer	
Willis Sand					Pliocene (?)	Willis Sand		
(Absent)	Zone 3, 4, 5, 6, 7	Heavily pumped layer	Evangeline aquifer	Tertiary	Goliad Sand	Evangeline aquifer		
Lagarto Clay	Zone 2	Zone 2	Burkeville aquiclude		Tertiary	Tertiary		Burkeville aquiclud
Oakville Sandstone	Zone 1	Zone 1	Jasper aquifer		Miocene	Fleming Formation	Upper part of Jasper aquifer	
Catahoula Sandstone				Jasper aquirer				Lower part of Jasper aquifer
			Catahoula Sandstone			Catahoula Sandstone	Catahoula Sandstone	
Jackson Group, undifferentiated			Jackson Group	-	Eocene	Jackson Group		

<sup>1</sup> Also, Liberty County (Anders and others, 1968) and Austin and Waller Counties (Wilson, 1967).

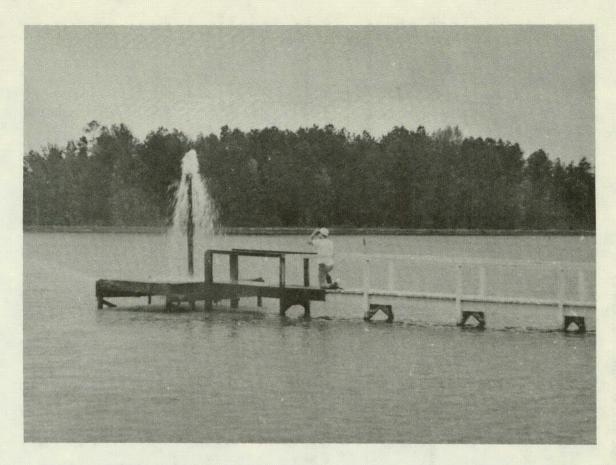


Figure 5.-Well TS-60-53-502, the Largest Capacity Flowing Well in Montgomery County

high enough, water in a well may rise to an altitude greater than that of the land surface, causing the well to flow. Figure 5 is a recent photograph of the largest capacity flowing well in Montgomery County (460 gallons per minute from end of casing 8 feet above land surface, August 19, 1966).

#### **Hydrologic Units**

Two types of hydrologic units considered in ground-water studies are aquifers and aquicludes. An aquifer is a geologic formation, group of formations, or a part of a formation that contains and transmits water. An aquiclude is a relatively impermeable formation, group of formations, or part of a formation that may contain water but is relatively impermeable or incapable of transmitting significant quantities in comparison to the adjacent aquifers.

In Montgomery County, the aquifers consist of semi-consolidated or unconsolidated sand, interbedded with clay; the aquicludes consist of clay that in some places includes sand. Six hydrologic units are recognized: the Catahoula Sandstone, the lower part of the Jasper aquifer, the upper part of the Jasper aquifer, the Burkeville aquiclude, the Evangeline aquifer, and the

Chicot aquifer. The relationship of these units to those in adjacent areas is shown in Table 2. Characteristics of these units in Montgomery County are given in Table 3. Hydrologic sections are shown on Figures 26, 27, 28, and 29.

#### Catahoula Sandstone

The Catahoula Sandstone, which consists of sand overlain by clay, is the deepest fresh water-bearing unit in the county. Figure 6 shows the approximate altitude of the base of the Catahoula, which extends from about 1,500 feet below sea level in the northwestern corner of the county to more than 5,000 feet below sea level in the southeastern part. Figure 6 also shows the extent of the fresh and slightly saline water in the aquifer.

#### Lower Part of the Jasper Aquifer

The lower part of the Jasper aquifer is separated from the upper part mainly on the basis of lithology. The upper part is mostly massive sand, composing 50-80 percent of the aquifer; the lower part is mostly interbedded sand and clay, with the sand composing 30-60 percent of the aquifer.


Table 3.—Characteristics of the Hydrologic Units in Montgomery County


HYDROLOGIC UNIT	APPROXIMATE THICKNESS (FEET)	GENERAL DIP OF BASE (FEET PER MILE)	PERCENT SAND	AVERAGE COEFFICIENT OF PERMEABILITY (GPD/FT <sup>2</sup> )
Chicot aquifer	0- 200	10	60-80	500ª/
Evangeline aquifer	0-1300	40	40-70	250 <sup>2</sup> /
Burkeville aquiclude	0- 300	40	0-20	-
Upper part of Jasper aquifer	100- 400	50	50-80	240
Lower part of Jasper aquifer	1100-2200	85	30-60	
Catahoula Sandstone	300- 500	90	30-50	

#### REMARKS

- Aquifer consists of unconsolidated sands and gravels, often ferruginous. Red sands and gravels in the Chicot overlie white clays and sands in the Evangeline.
- Chicot and Evangeline aquifers may be distinguished by differences in self potential curve on electrical logs.
- Aquifer contains very fresh, often acidic and iron-rich water. Small wells developed; large capacity wells may be developed in southeastern part of county.
- Water levels higher than in the Chicot aquifer, except in southeastern part of county.
- Contains fresh water. Small wells developed; large capacity wells may be developed except in areas near the upper limit of the outcrop.
- Massive blanket clay with thin interbeds of sand to massive silty sands.
- Small wells developed in a few areas where fresh water is present.
- Massive blanket sand with thin interbeds of clay to massive sandy clays.
- Large wells developed in some areas, but may be developed in all areas except in extreme northwest corner of county. Fresh, often hard water.
- Contains interbedded sands and clays. Lower part of Jasper aquifer and Catahoula Sandstone may be distinguished by differences in self potential curve on electrical logs.
- Large quantities of slightly and moderately saline water. Moderate quantities of fresh water. Generally, water at base of unit is more saline than at top of Lower Catahoula Sandstone.
- Massive sand underlies clay, silty sands, or moderately saline water-bearing sand.
- Contains moderate quantities of fresh water, and appears to be less consolidated and more permeable than the sands above it.

<sup>a) Estimated from data in adjoining counties.</sup> 

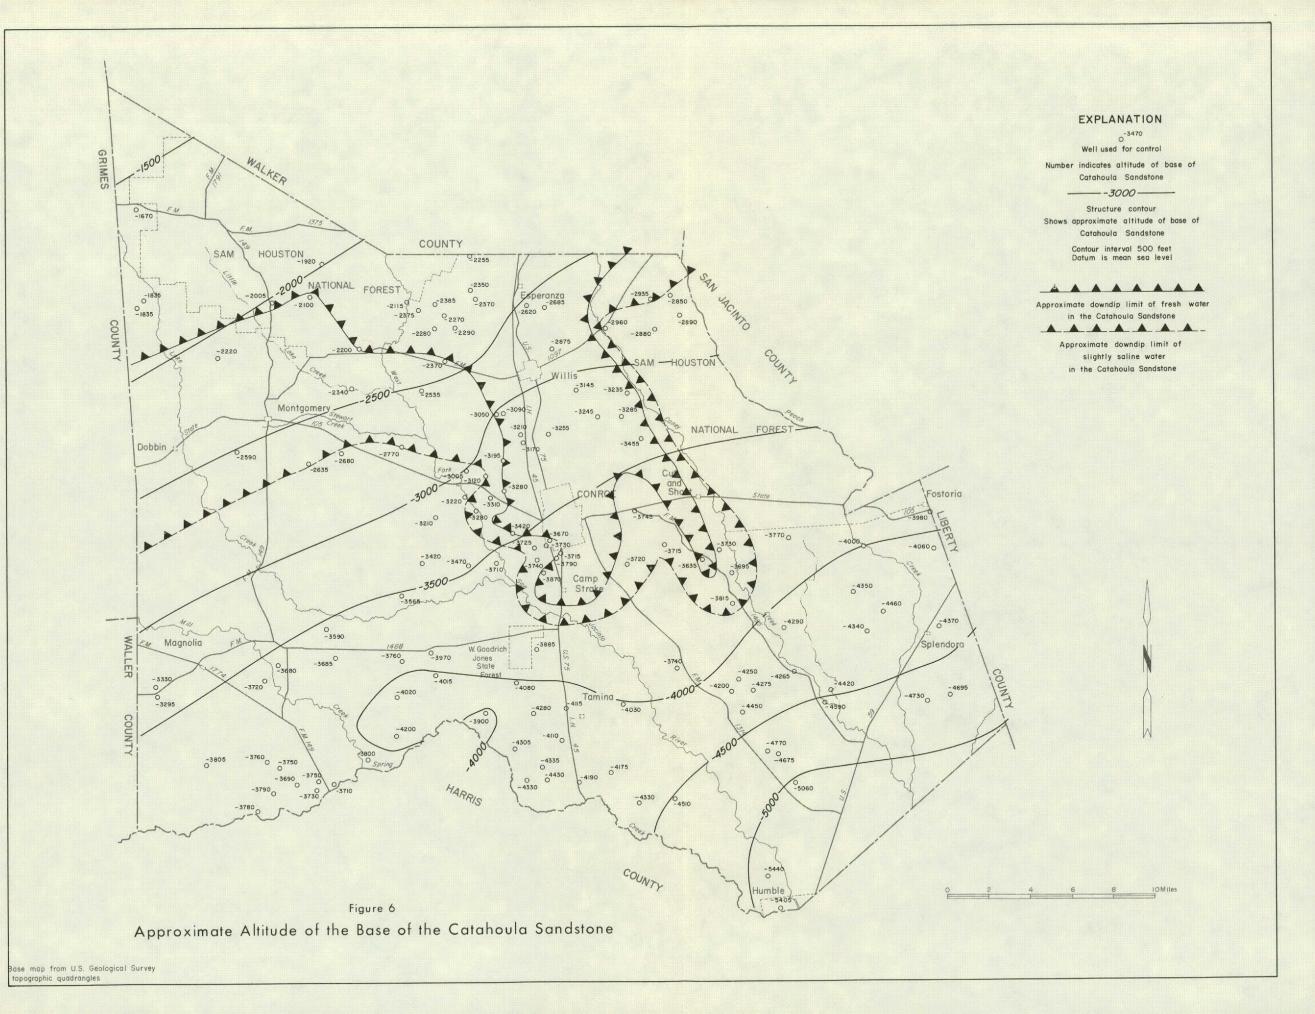

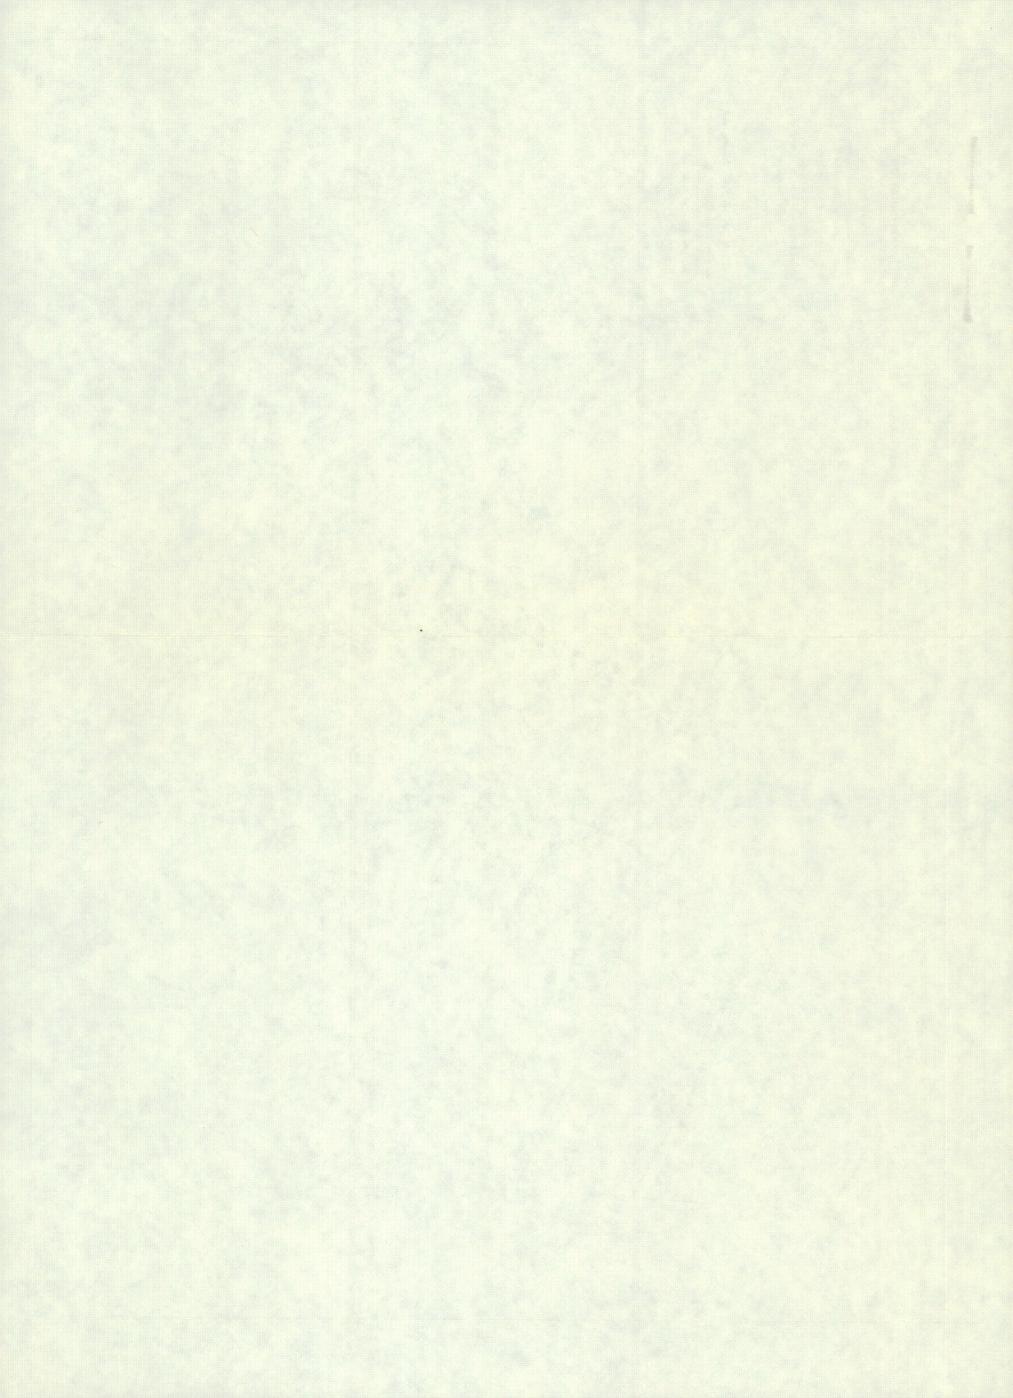

The lower part of the Jasper aquifer contains only small amounts of fresh water in Montgomery County. Figure 7 shows the approximate altitude of the base of the lower part of the Jasper aquifer and the base of the sand containing fresh water in the aquifer. Figure 8 shows the approximate altitude of the base of the lower part of the Jasper aquifer and the base of the sand containing slightly saline water in the aquifer.

#### Upper Part of the Jasper Aquifer

The upper part of the Jasper aquifer consists of a massive sand below the base of the Burkeville aquiclude. The aquifer correlates with "Zone 1" in the Houston district (Lang and Winslow, 1950, pl. 1) and with most of the fresh water-bearing sands of the upper part of the Jasper aquifer in San Jacinto (Sandeen, 1968), Liberty (Anders, McAdoo, and Alexander, 1968), and Austin and Waller (Wilson, 1967) Counties. Figure 9 shows the approximate altitude of the base of the upper part of the Jasper aquifer and the areas where slightly saline water is present in the aquifer.

#### Burkeville Aquiclude

The Burkeville aquiclude consists of a generally massive clay near the top of the Fleming Formation. The aquiclude correlates with "Zone 2" in the Houston district (Lang and Winslow, 1950, pl. 1, and Wood and Gabrysch, 1965, fig. 3). It is the same unit described as the Burkeville aquiclude in reports on Liberty (Anders and others, 1968), Austin and Waller (Wilson, 1967), and San Jacinto (Sandeen, 1968) Counties. Figure 10 shows the approximate altitude of the base of the Burkeville aquiclude.

#### **Evangeline Aquifer**

The Evangeline aquifer, which is an important source of water in the Houston area, is composed of a sequence of alternating sands and clays of the Goliad Sand and the part of the Fleming Formation above the Burkeville aquiclude. In the northern part of the county, remnants of the Willis Sand and younger deposits, which are in hydraulic continuity with the Evangeline, are included in the Evangeline aquifer. The base of the aquifer correlates with the base of "Zone 3" in the Houston district (Lang and Winslow, 1950, pl. 1). The Evangeline aquifer is the same hydrologic unit referred to as the "Heavily Pumped Layer" by Wood and Gabrysch (1965, fig. 4). The base of the unit correlates with the base of the Evangeline aquifer as described in reports in neighboring counties.

Figure 11 shows the approximate altitude of the base of the Evangeline aquifer and the thickness of fresh water-bearing sands in the Chicot and Evangeline aquifers.

#### **Chicot Aquifer**

The Chicot is a continuous aquifer in the southern part of the county. It consists of the Willis Sand, Bentley and Montgomery Formations, and younger deposits. As previously explained, remnants of these formations in the northern part of the county are included in the Evangeline. The base of the Chicot aquifer is not everywhere the base of the Willis Sand. The Alta Loma Sand in the Houston district (Wood and Gabrysch, 1965, fig. 3) is the basal part of the Chicot aquifer. Figure 12 shows the approximate altitude of the base of the Chicot aquifer and the approximate altitude of water levels in wells screened in the aquifer, 1966-67. The thickness of fresh water-bearing sands in the Chicot and Evangeline aquifers can be seen on Figure 11.


#### **Hydraulic Properties of the Aquifers**


"The worth of an aquifer as a fully developed source of water depends largely on two inherent characteristics: its ability to store and its ability to transmit water" (Ferris and others, 1962, p. 70). These characteristics are expressed by the coefficient of storage and the coefficient of transmissibility.


The coefficients of transmissibility and storage are used to predict theoretical drawdown in water levels in wells caused by pumping. Figure 13 shows the theoretical drawdown of water levels in wells at distances up to 10 miles from a well or group of wells pumping 1 mgd for 1 year. Calculations to obtain the curves were based on the different assumptions of coefficients of transmissibility and storage shown on the graph.


Little is known about the hydrologic properties of the Catahoula Sandstone and the lower part of the Jasper aquifer in Montgomery County. A short aquifer test performed on wells tapping the Catahoula Sandstone in the city of Huntsville (Walker County) indicates coefficients of transmissibility, permeability, and storage of 27,400 gpd (gallons per day) per foot, 200 gpd per square foot, and 0.0037, respectively (Winslow, 1950, p. 19).

The coefficient of storage of an aquifer is the volume of water it releases from or takes into storage per unit surface area of the aquifer per unit change in the component of head normal to that surface. Under water-table conditions, the coefficient of storage is nearly equal to the specific yield, which is the amount of water a saturated formation will yield by draining under the force of gravity. The storage coefficients of aquifers under water-table conditions range from about 0.05 to 0.30 while those under artesian conditions range from about 0.00001 to 0.001. Under artesian conditions, the coefficient of storage is a measure of the elasticity of the water and the aquifer. Additionally, in places in Montgomery County where significant water-level

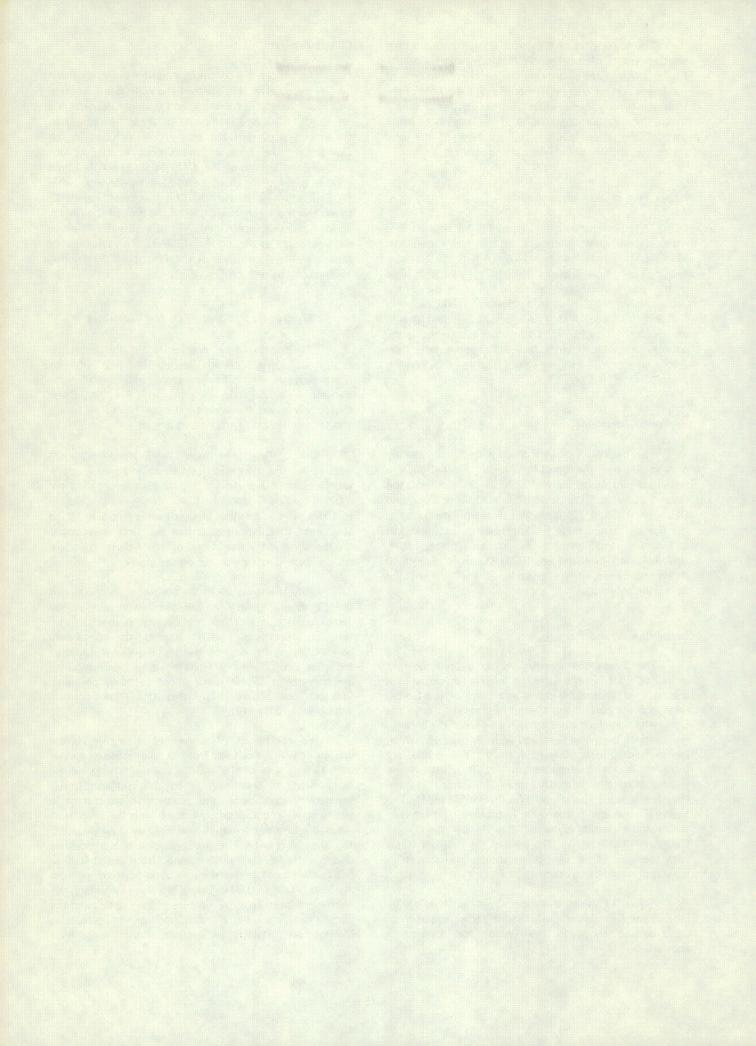


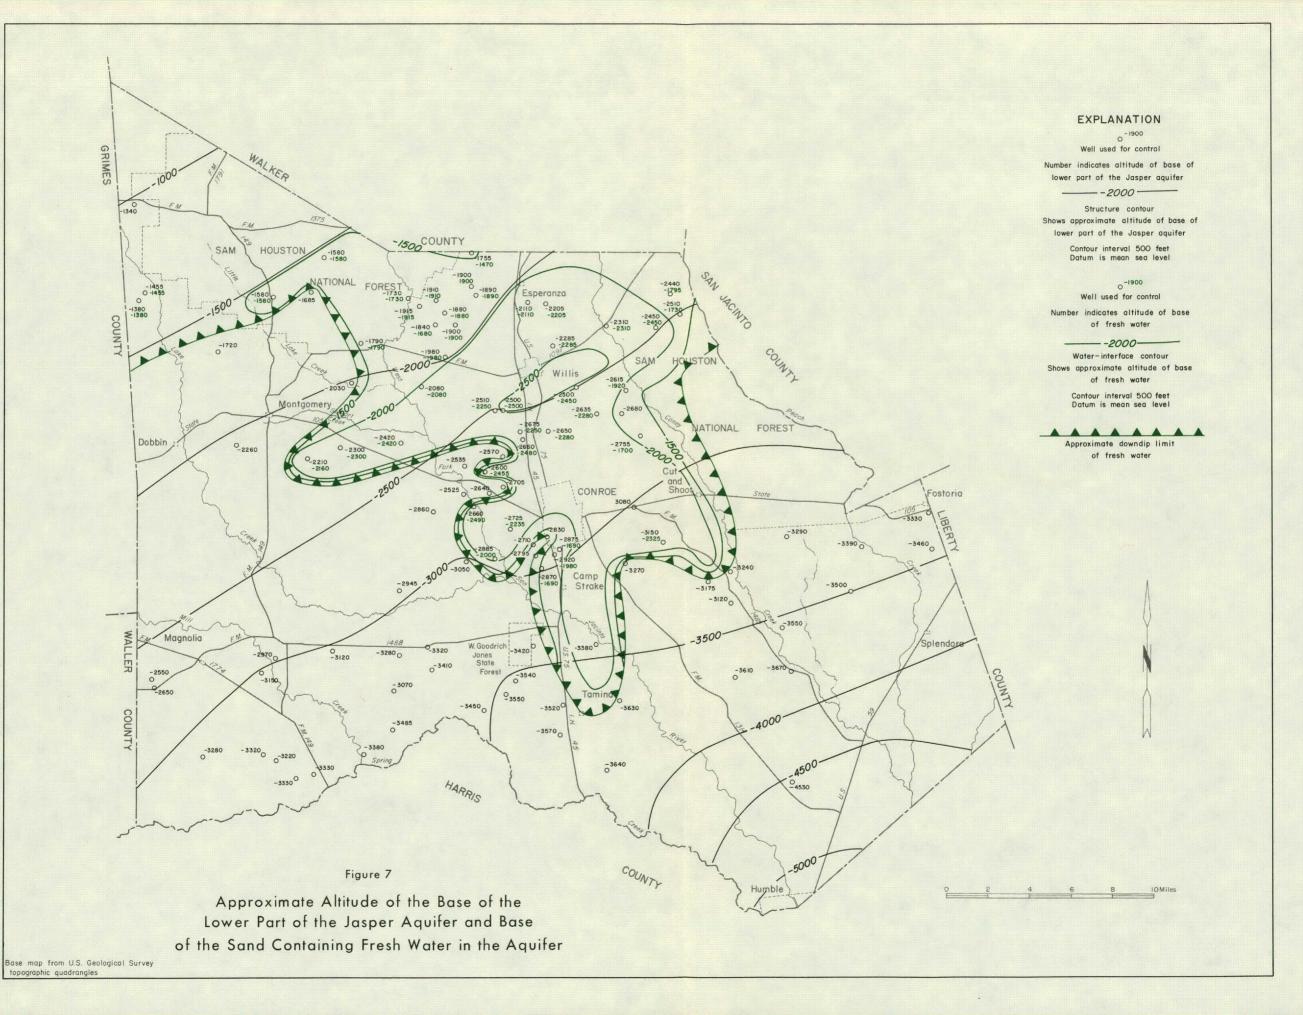

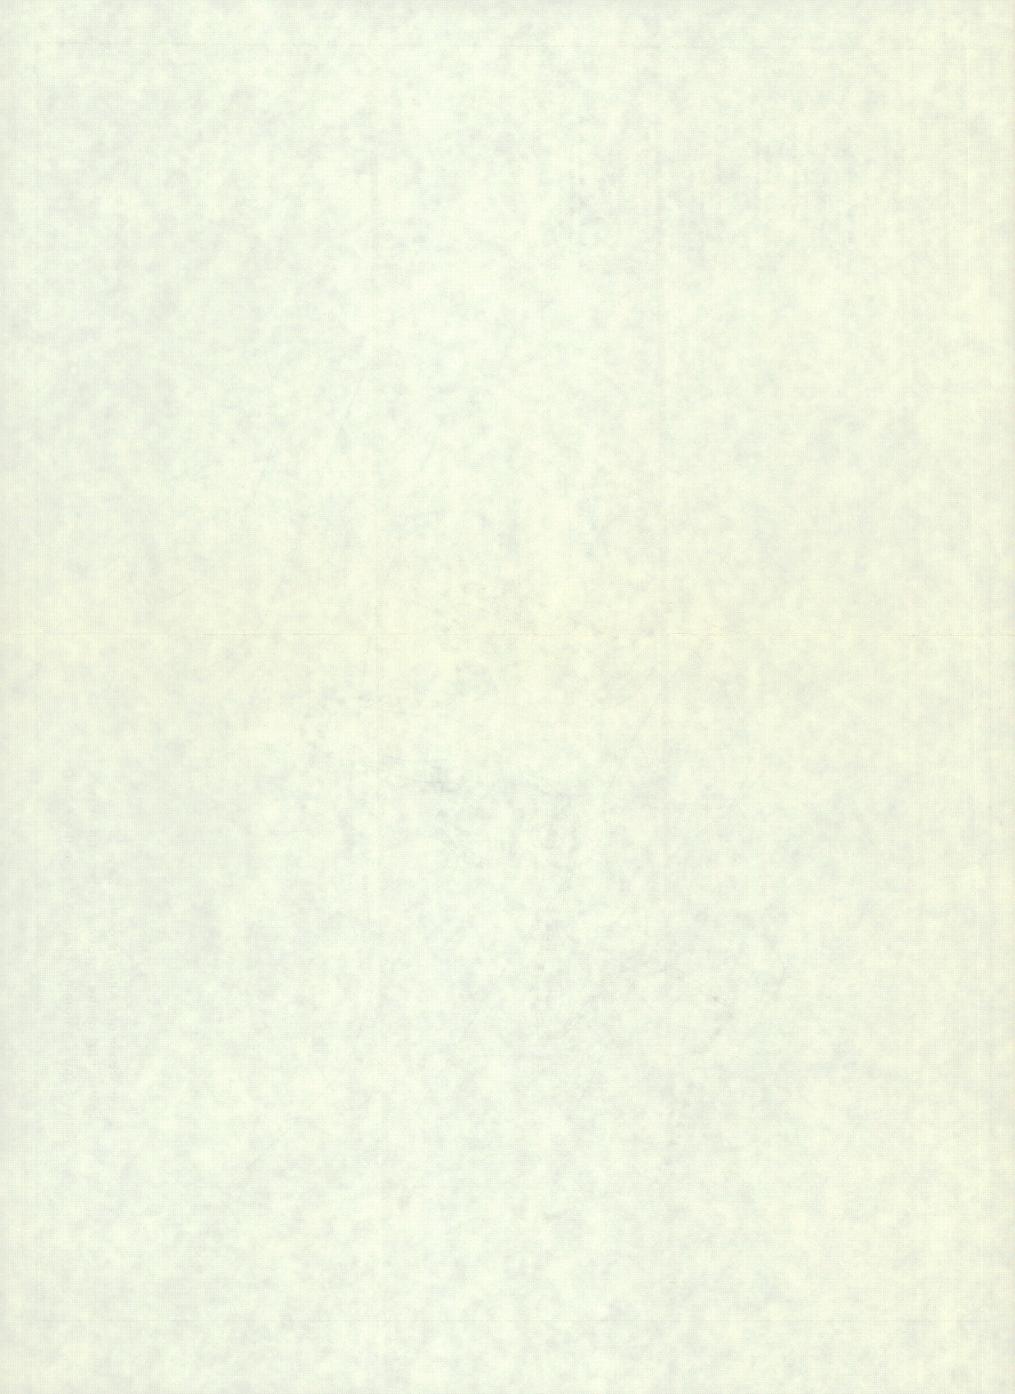

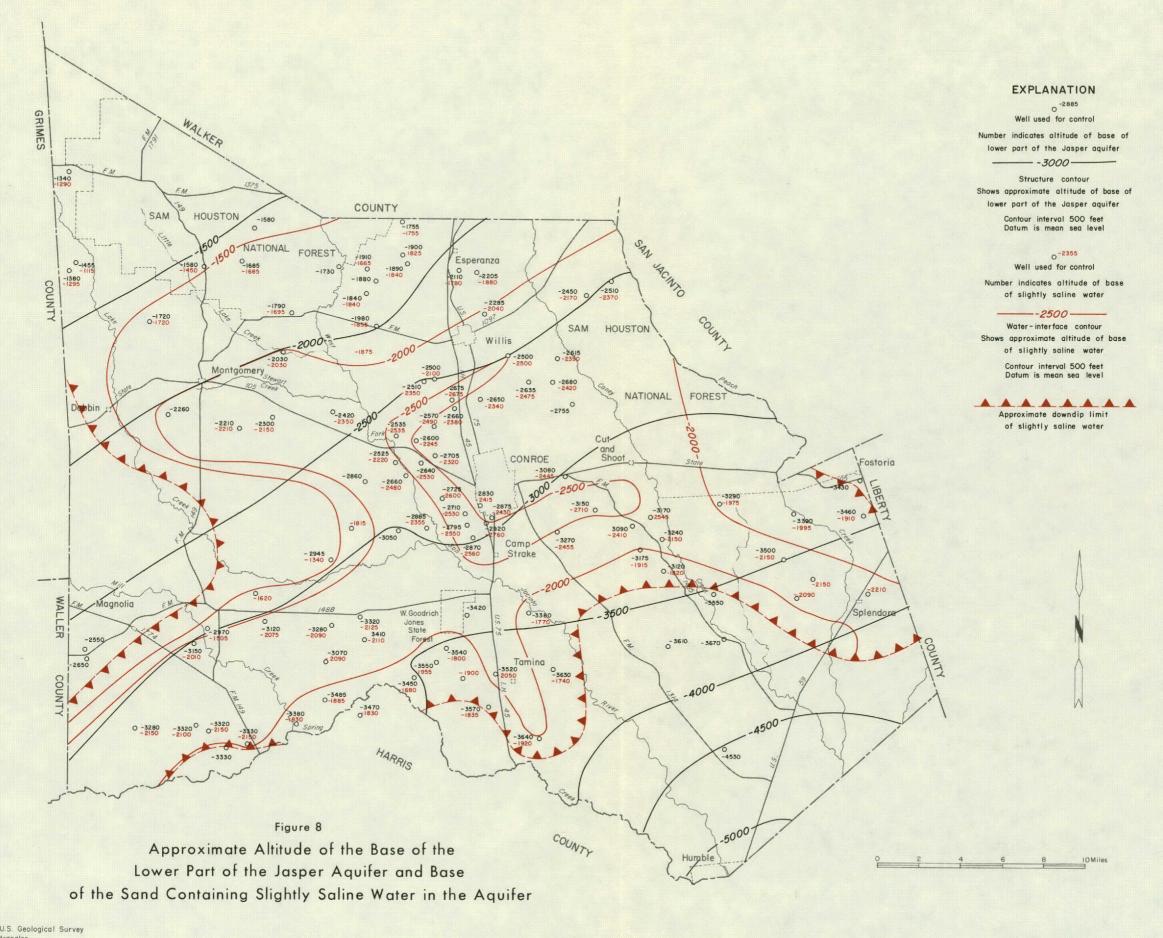

Base map from U.S. Geological Survey topographic quadrangles

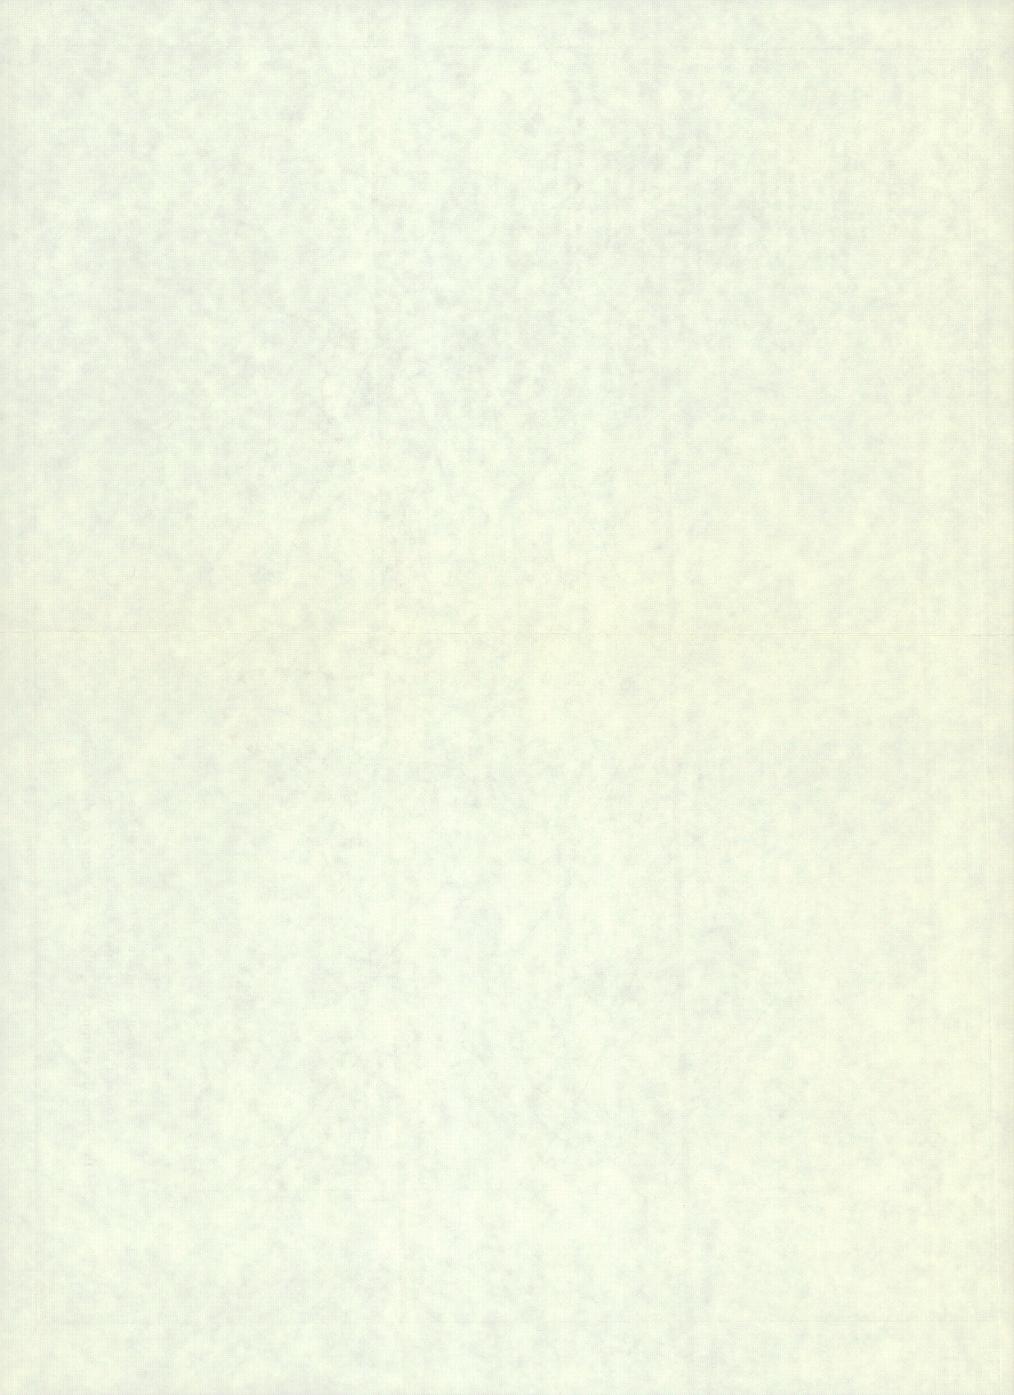

The lower part of the Jasper aquifer contains only small amounts of fresh water in Montgomery County. Figure 7 shows the approximate altitude of the base of the lower part of the Jasper aquifer and the base of the sand containing fresh water in the aquifer. Figure 8 shows the approximate altitude of the base of the lower part of the Jasper aquifer and the base of the sand containing slightly saline water in the aquifer.

#### Upper Part of the Jasper Aquifer

The upper part of the Jasper aquifer consists of a massive sand below the base of the Burkeville aquiclude. The aquifer correlates with "Zone 1" in the Houston district (Lang and Winslow, 1950, pl. 1) and with most of the fresh water-bearing sands of the upper part of the Jasper aquifer in San Jacinto (Sandeen, 1968), Liberty (Anders, McAdoo, and Alexander, 1968), and Austin and Waller (Wilson, 1967) Counties. Figure 9 shows the approximate altitude of the base of the upper part of the Jasper aquifer and the areas where slightly saline water is present in the aquifer.

#### Burkeville Aquiclude

The Burkeville aquiclude consists of a generally massive clay near the top of the Fleming Formation. The aquiclude correlates with "Zone 2" in the Houston district (Lang and Winslow, 1950, pl. 1, and Wood and Gabrysch, 1965, fig. 3). It is the same unit described as the Burkeville aquiclude in reports on Liberty (Anders and others, 1968), Austin and Waller (Wilson, 1967), and San Jacinto (Sandeen, 1968) Counties. Figure 10 shows the approximate altitude of the base of the Burkeville aquiclude.

#### **Evangeline Aquifer**

The Evangeline aquifer, which is an important source of water in the Houston area, is composed of a sequence of alternating sands and clays of the Goliad Sand and the part of the Fleming Formation above the Burkeville aquiclude. In the northern part of the county, remnants of the Willis Sand and younger deposits, which are in hydraulic continuity with the Evangeline, are included in the Evangeline aquifer. The base of the aquifer correlates with the base of "Zone 3" in the Houston district (Lang and Winslow, 1950, pl. 1). The Evangeline aquifer is the same hydrologic unit referred to as the "Heavily Pumped Layer" by Wood and Gabrysch (1965, fig. 4). The base of the unit correlates with the base of the Evangeline aquifer as described in reports in neighboring counties.

Figure 11 shows the approximate altitude of the base of the Evangeline aquifer and the thickness of fresh water-bearing sands in the Chicot and Evangeline aquifers.

#### Chicot Aquifer

The Chicot is a continuous aquifer in the southern part of the county. It consists of the Willis Sand, Bentley and Montgomery Formations, and younger deposits. As previously explained, remnants of these formations in the northern part of the county are included in the Evangeline. The base of the Chicot aquifer is not everywhere the base of the Willis Sand. The Alta Loma Sand in the Houston district (Wood and Gabrysch, 1965, fig. 3) is the basal part of the Chicot aquifer. Figure 12 shows the approximate altitude of the base of the Chicot aquifer and the approximate altitude of water levels in wells screened in the aquifer, 1966-67. The thickness of fresh water-bearing sands in the Chicot and Evangeline aquifers can be seen on Figure 11.


#### Hydraulic Properties of the Aquifers


"The worth of an aquifer as a fully developed source of water depends largely on two inherent characteristics: its ability to store and its ability to transmit water" (Ferris and others, 1962, p. 70). These characteristics are expressed by the coefficient of storage and the coefficient of transmissibility.


The coefficients of transmissibility and storage are used to predict theoretical drawdown in water levels in wells caused by pumping. Figure 13 shows the theoretical drawdown of water levels in wells at distances up to 10 miles from a well or group of wells pumping 1 mgd for 1 year. Calculations to obtain the curves were based on the different assumptions of coefficients of transmissibility and storage shown on the graph.


Little is known about the hydrologic properties of the Catahoula Sandstone and the lower part of the Jasper aquifer in Montgomery County. A short aquifer test performed on wells tapping the Catahoula Sandstone in the city of Huntsville (Walker County) indicates coefficients of transmissibility, permeability, and storage of 27,400 gpd (gallons per day) per foot, 200 gpd per square foot, and 0.0037, respectively (Winslow, 1950, p. 19).


The coefficient of storage of an aquifer is the volume of water it releases from or takes into storage per unit surface area of the aquifer per unit change in the component of head normal to that surface. Under water-table conditions, the coefficient of storage is nearly equal to the specific yield, which is the amount of water a saturated formation will yield by draining under the force of gravity. The storage coefficients of aquifers under water-table conditions range from about 0.05 to 0.30 while those under artesian conditions range from about 0.00001 to 0.001. Under artesian conditions, the coefficient of storage is a measure of the elasticity of the water and the aquifer. Additionally, in places in Montgomery County where significant water-level

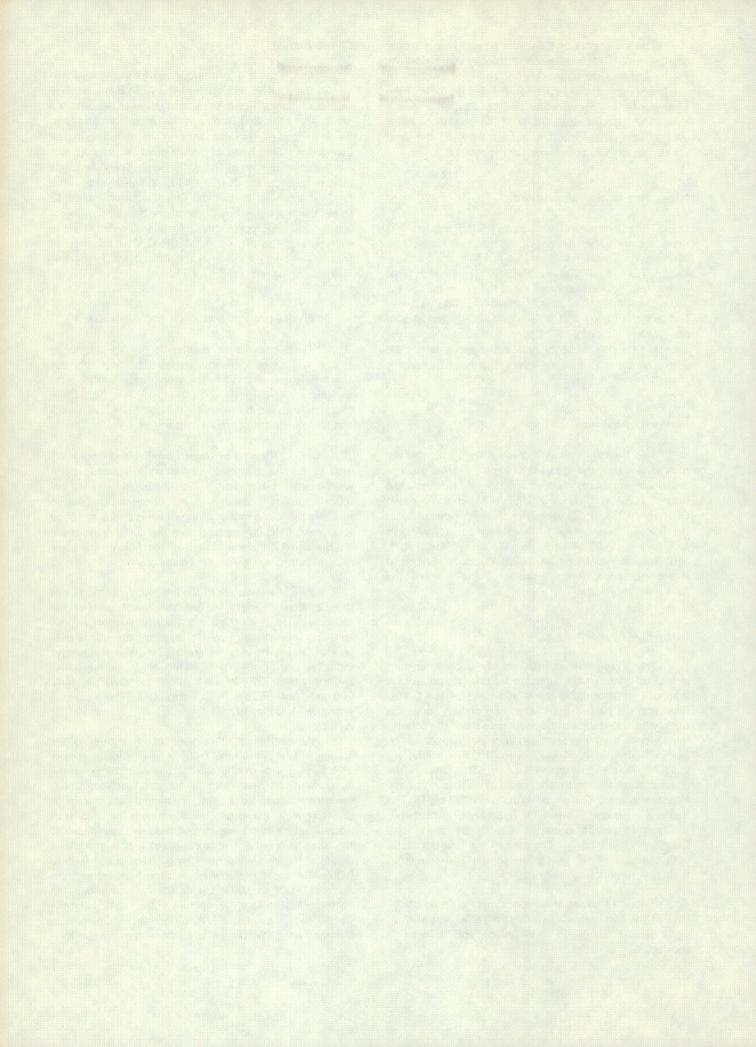


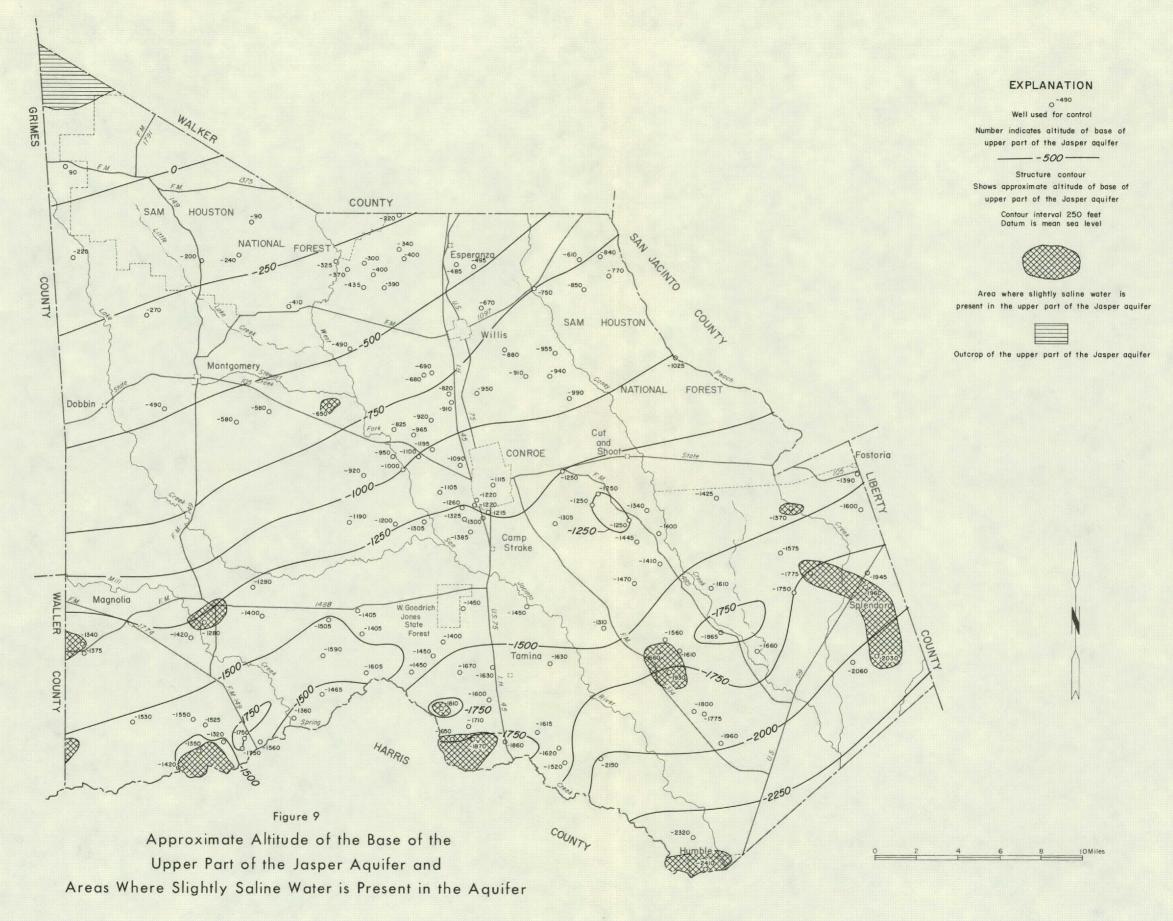


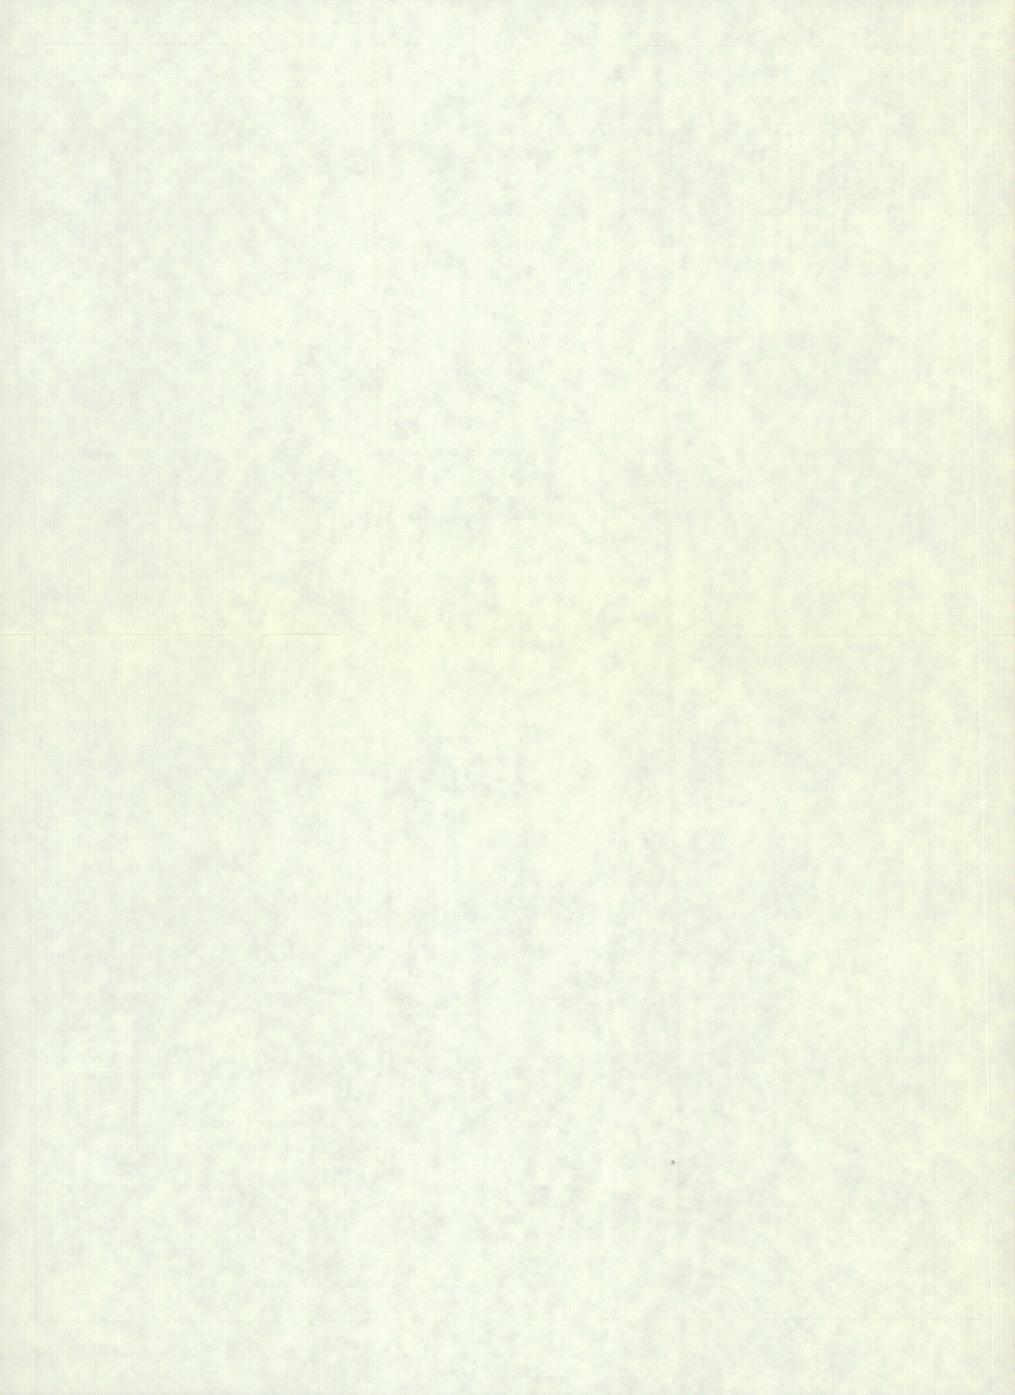


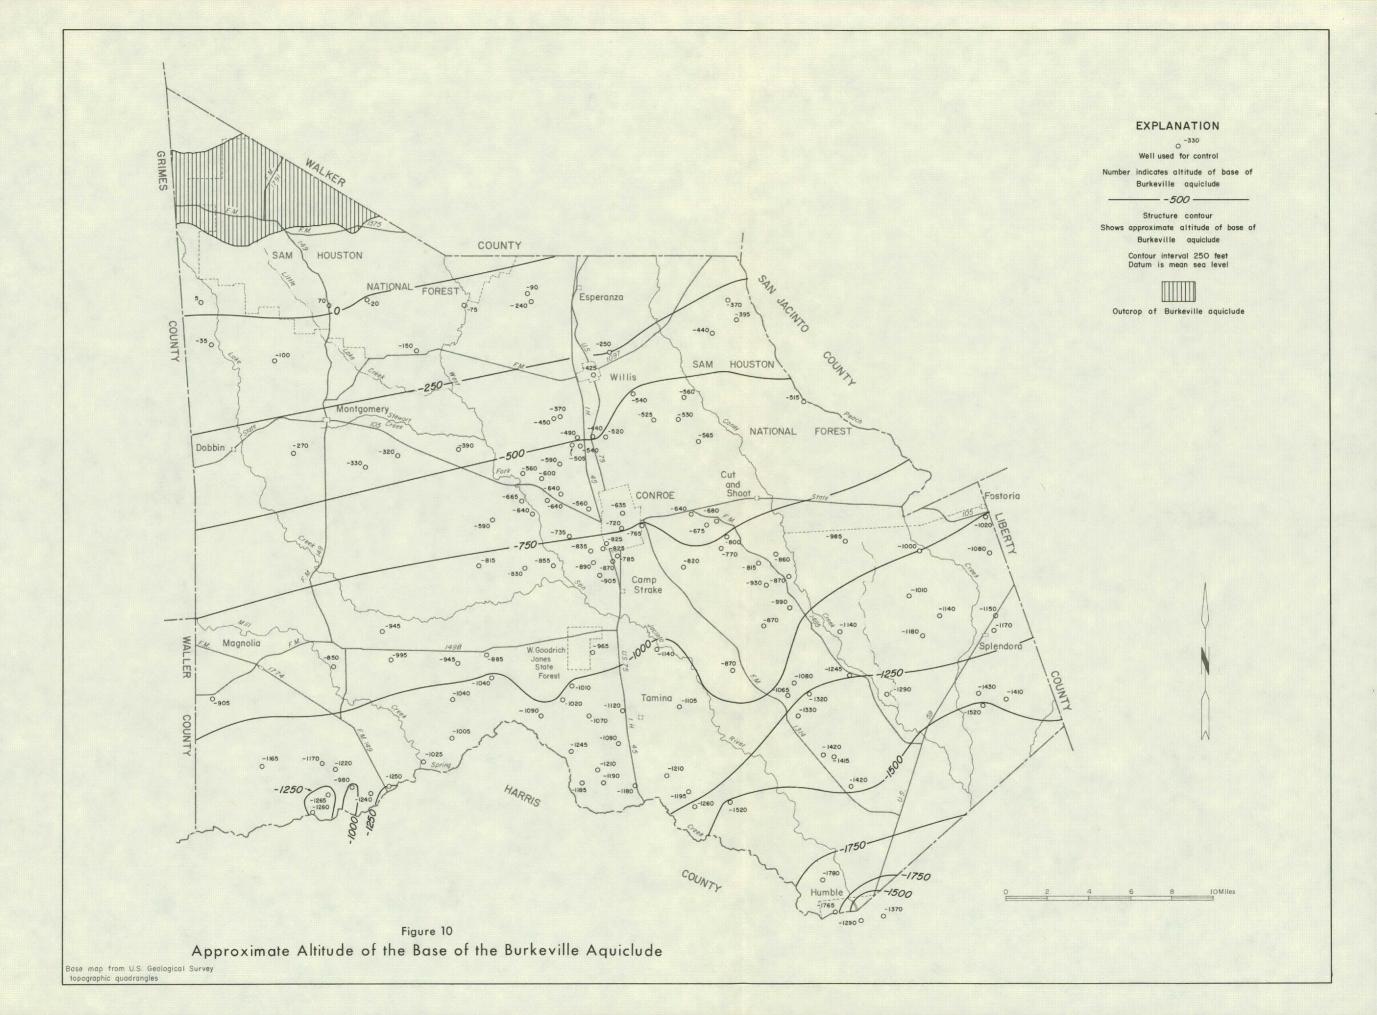


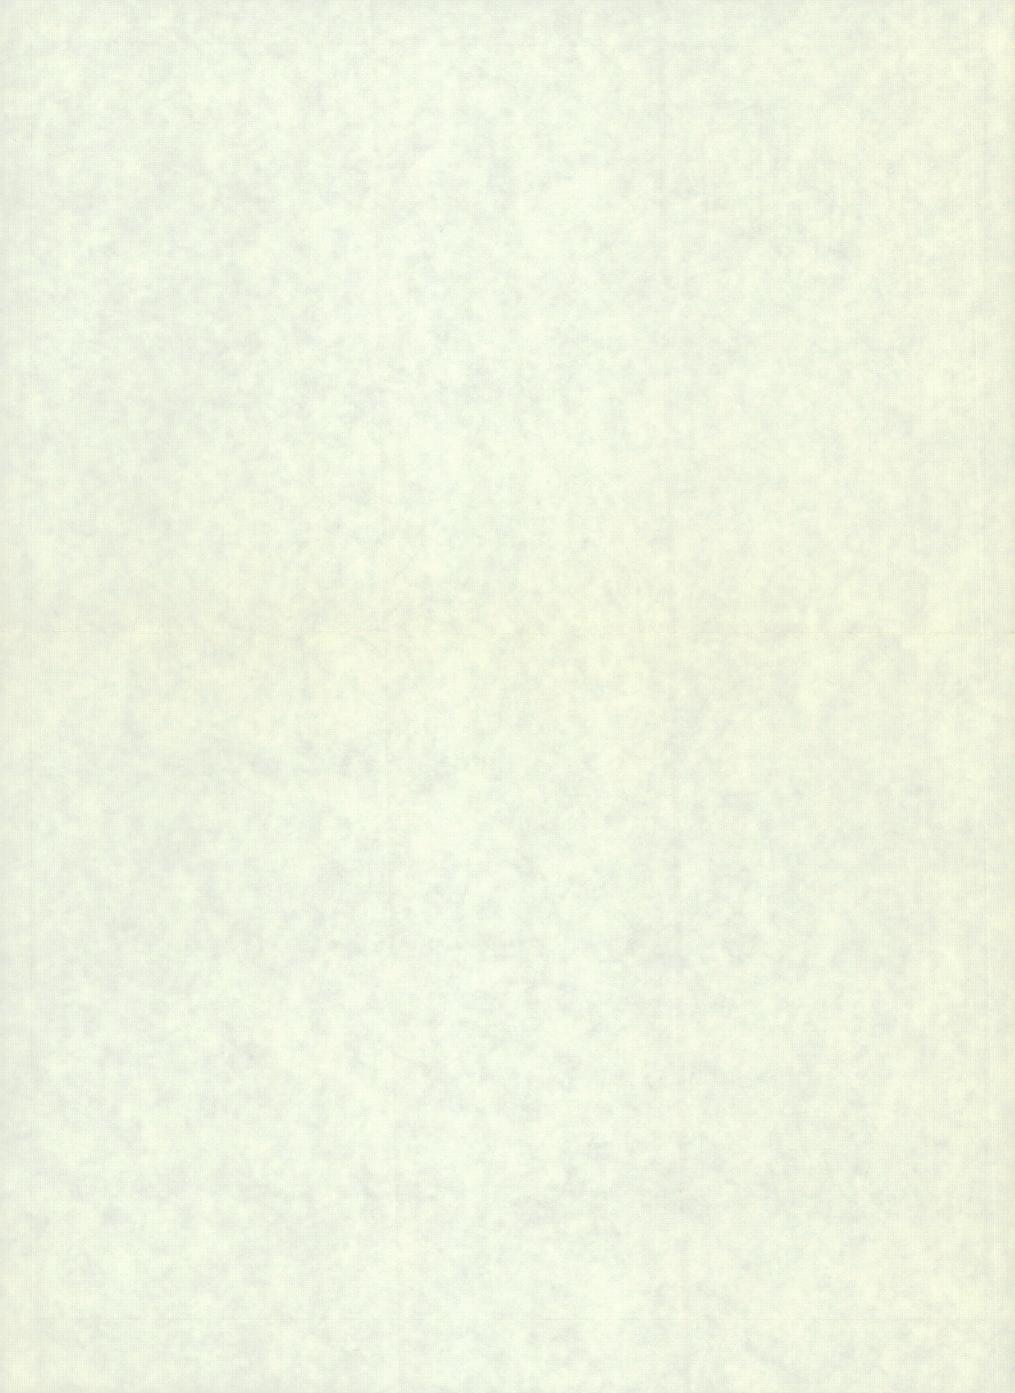

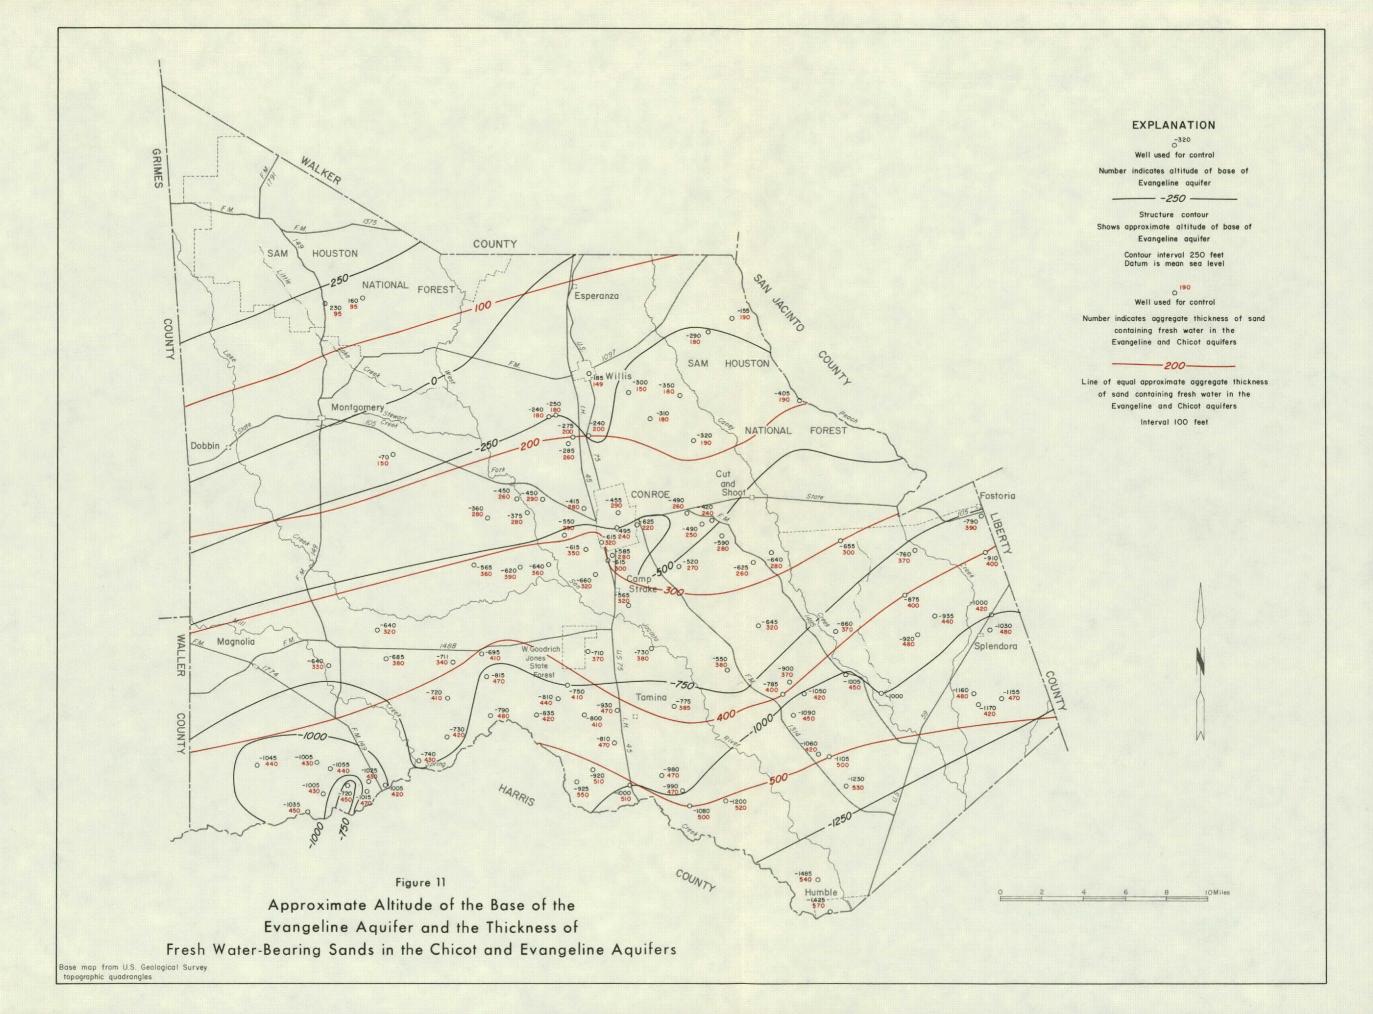

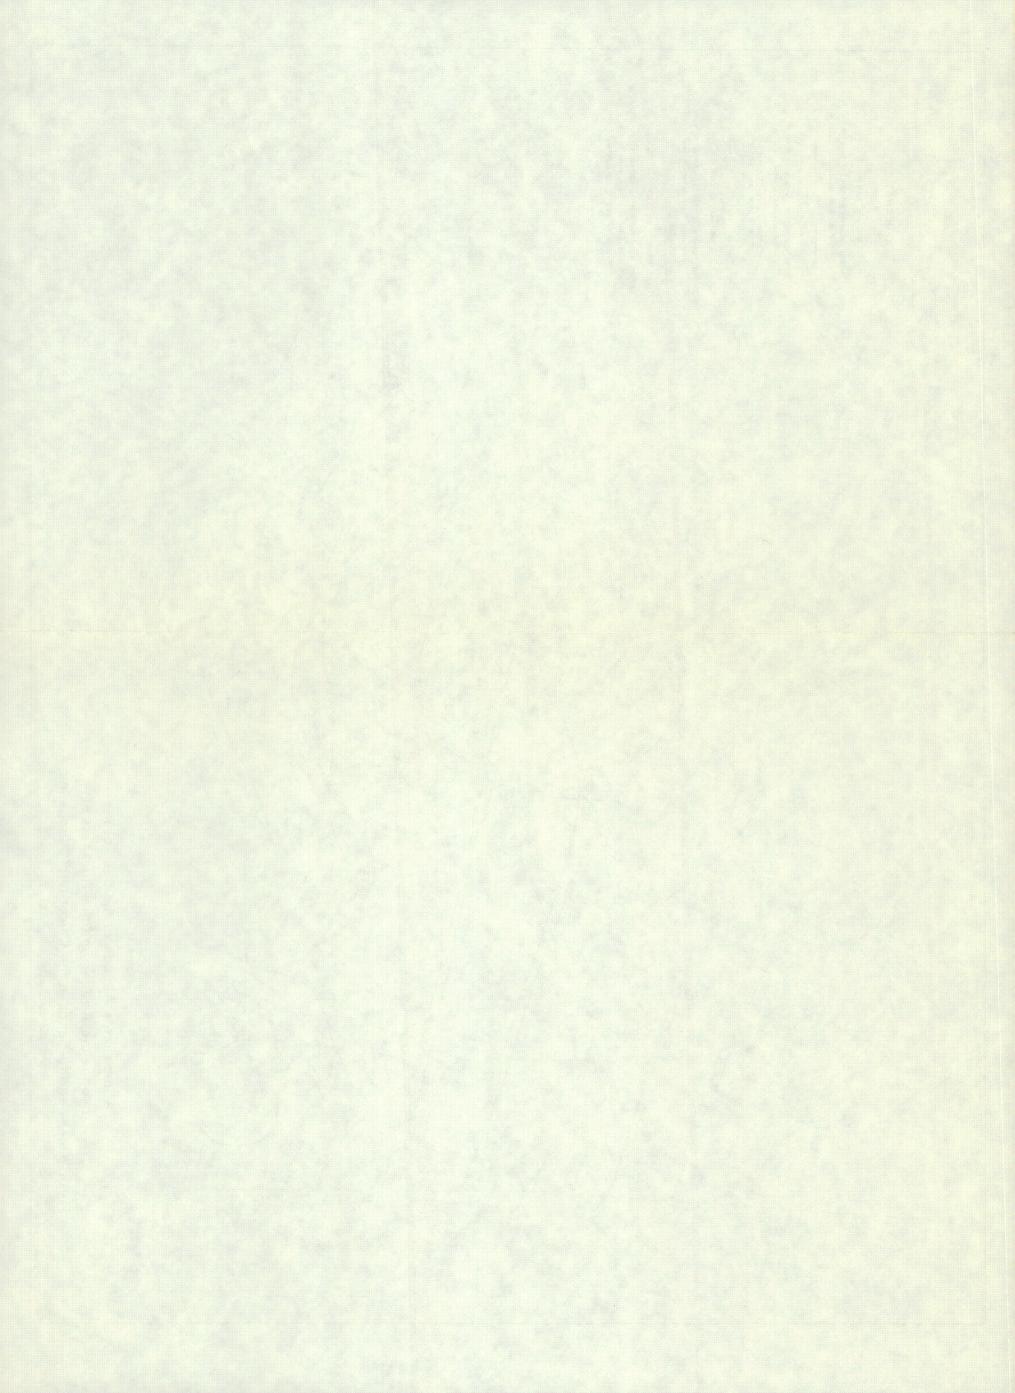

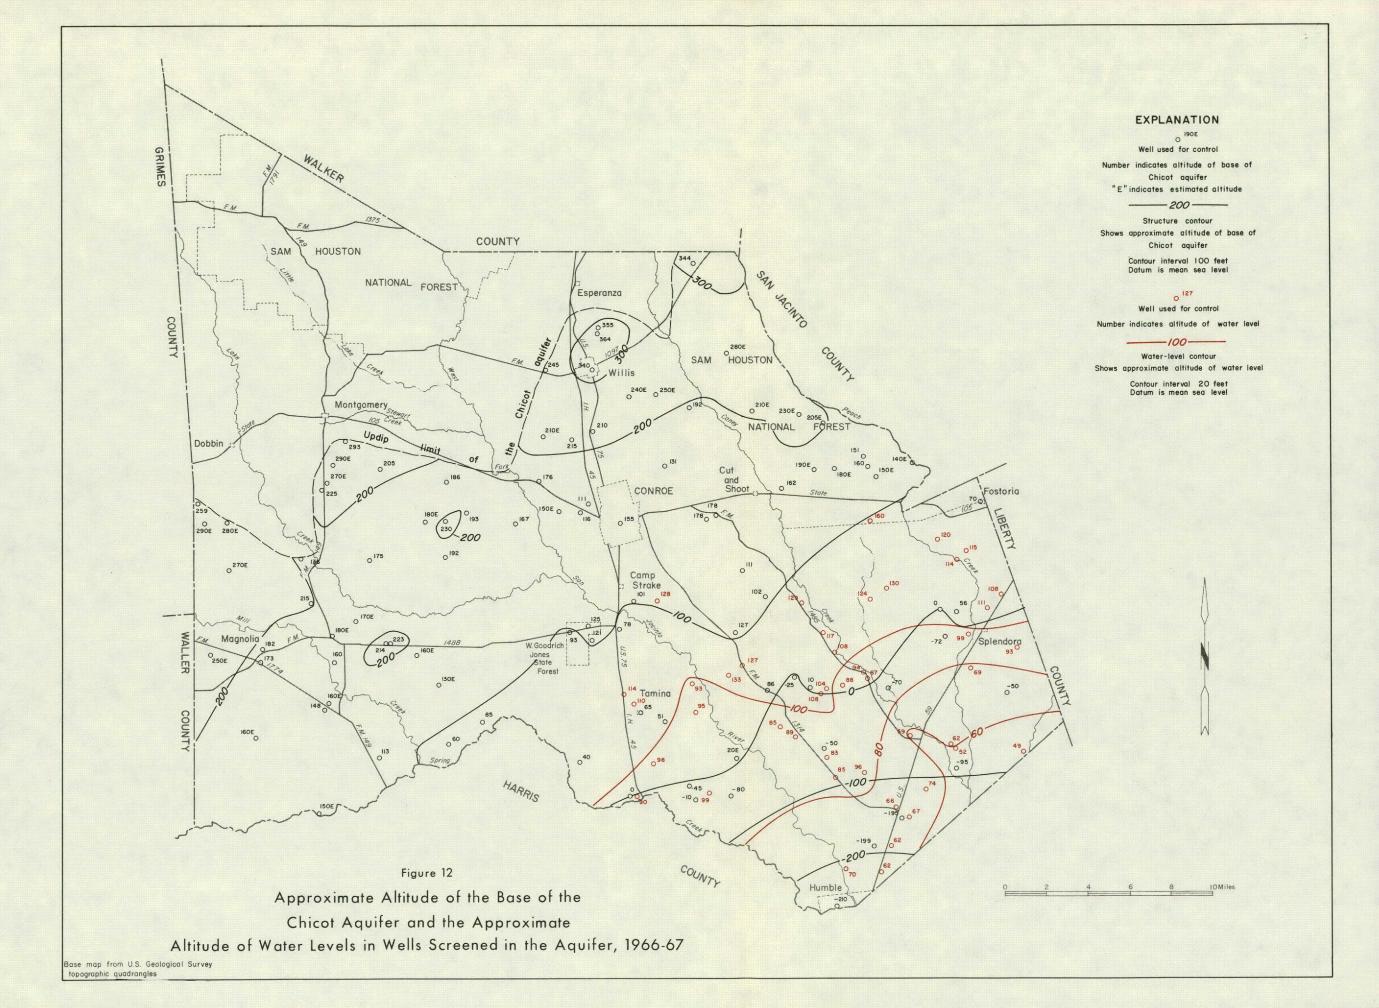

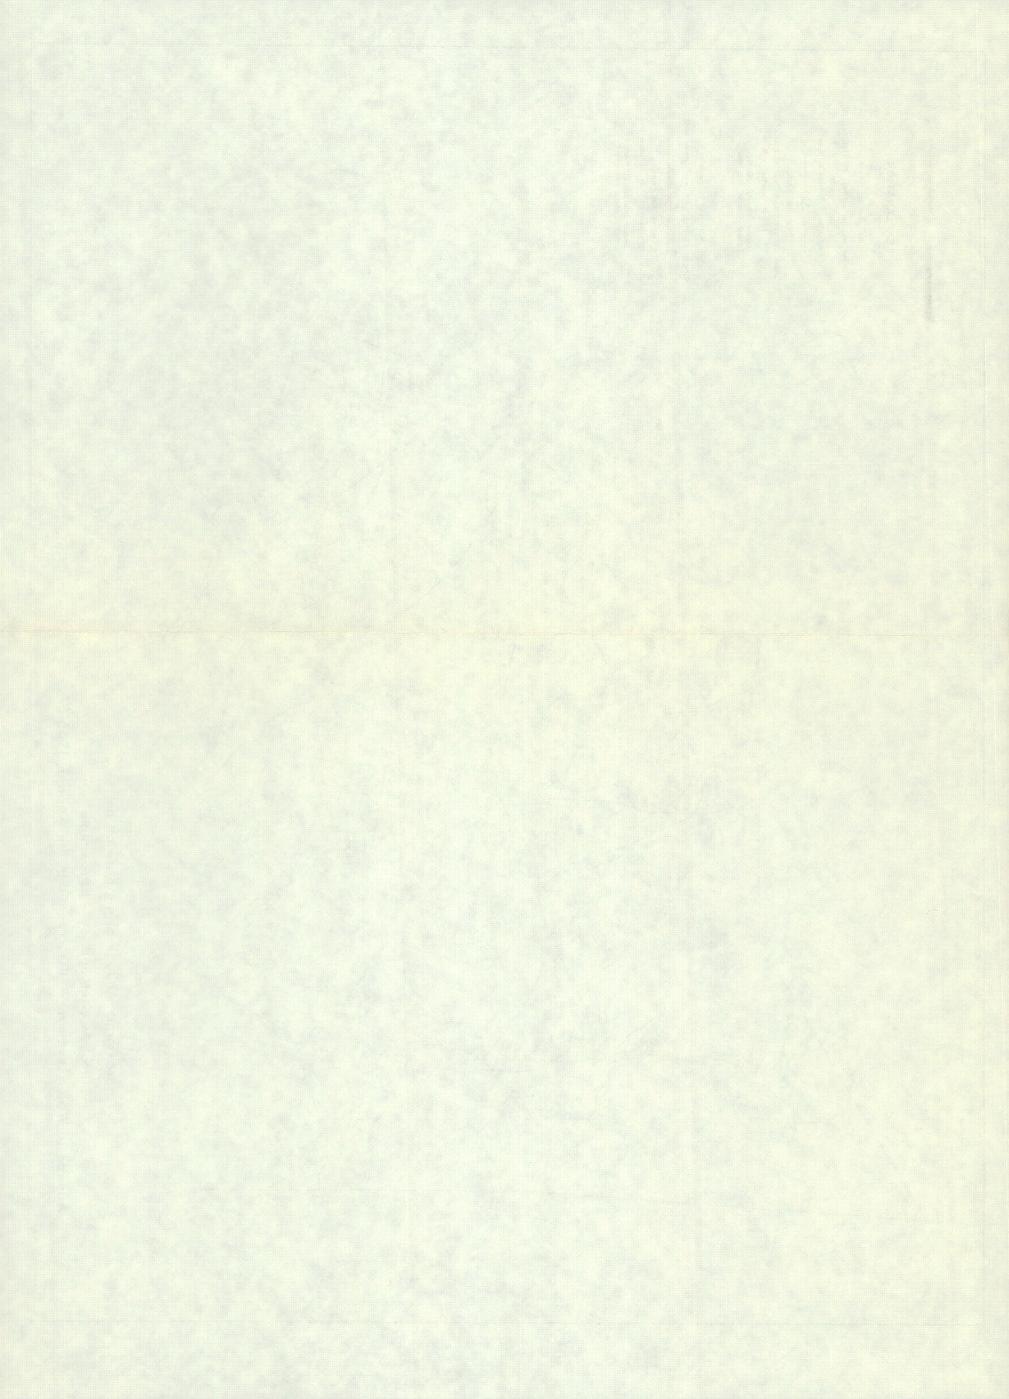

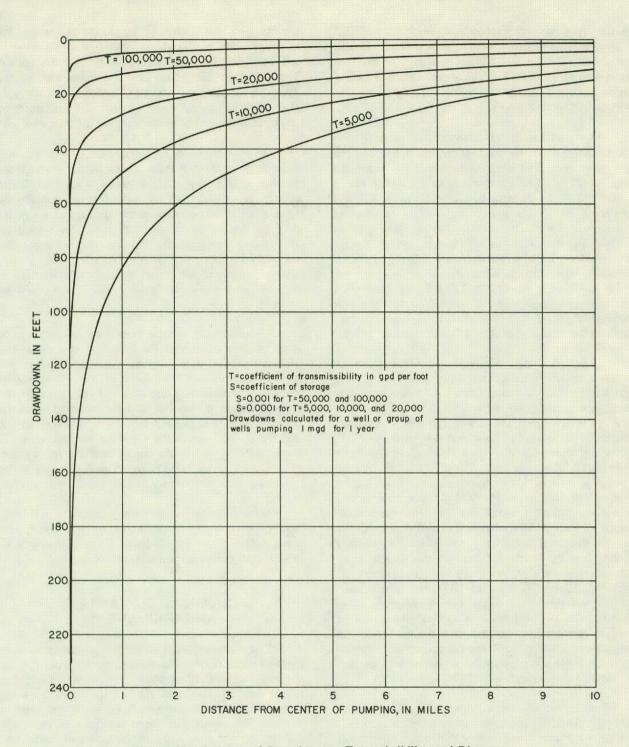


Figure 13.—Relation of Drawdown to Transmissibility and Distance

declines have caused land-surface subsidence, the storage coefficient is also a measure of the water released from compaction of clay beds.

Permeability is a measure of the ability of an aquifer to transmit water. The coefficient of permeability is defined as the rate of flow of water in gallons per day through a cross-sectional area of one square foot under a hydraulic gradient of one foot per foot at a temperature of 16°C (60°F). In field practice, the

temperature adjustment is disregarded and the permeability is then understood to be a field coefficient at the prevailing water temperature. The coefficient of transmissibility is the product of the field coefficient of permeability and the saturated thickness of the aquifer.

The coefficients of storage and transmissibility of the upper part of the Jasper aquifer were determined by 9 aquifer tests made in 6 wells near Conroe and at Cleveland (Liberty County). The test data were analyzed by the Theis recovery method (Wenzel, 1942, p. 95-97) or by the Theis recovery method as modified by Cooper and Jacob (1946, p. 526-534). The results of the tests are shown in Table 4. The calculated values of permeability are based on the total amount of sand believed to be contributing to the well.

The coefficients of permeability ranged from 150 to 300 gpd per square foot, and averaged 240 gpd per square foot. The average permeability is within the range of 212 to 272 gpd per square foot observed in Austin and Waller Counties by Wilson (1967, p. 13), and very close to the 247 gpd per square foot observed in San Jacinto County by Sandeen (1968). Based on an average saturated thickness of 150 feet and an average permeability of 240 gpd per square foot, the average composite transmissibility of the upper part of the Jasper aquifer is about 36,000 gpd per foot. The coefficients of transmissibility determined from the tests averaged 33,500 gpd per foot. This value is greater than obtained by Wilson (1967, p. 13) and Sandeen (1968).

Little is known about the transmissibility or storage characteristics of the Evangeline and Chicot aquifers in Montgomery County. Although a few large-capacity wells are completed in the Evangeline, none are completed in the Chicot. However, the characteristics of these aguifers have been extensively tested in Harris and other counties where the aquifer has been developed by wells. Wood and Gabrysch (1965, figs. 34 and 35) indicate a range in transmissibility from 50,000 to 150,000 gpd per foot and a storage coefficient of 0.0025 in the "Heavily Pumped Layer," or Evangeline aquifer in the northern part of the Houston district. The average coefficient of permeability of the "Heavily Pumped Layer" in this area is about 300 gpd per square foot (Wood and Gabrysch, 1965, figs. 33 and 34). Wilson (1967) calculated an average permeability of 215 gpd per square foot from 26 tests in Austin and Waller Counties. The estimated average permeability in the Evangeline aquifer in Montgomery County is 250 gpd per square foot, and the estimated average composite transmissibility of the full thickness of the Evangeline is 50,000 gpd per foot.

The Chicot aquifer in Montgomery County was not tested. The average permeability of the "Alta Loma" in southern Harris and northern Galveston Counties is about 500 gpd per square foot (Wood and Gabrysch, 1965, figs. 36 and 37). This figure is probably near the average permeability of the aquifer in Montgomery County. Based on a permeability of 500 gpd per square foot, the average composite transmissibility is about 25,000 gpd per foot.

# Recharge, Movement, and Discharge of Ground Water

The Chicot and Evangeline aquifers and the upper part of the Jasper aquifer crop out in Montgomery

County and are recharged by precipitation on the outcrops. Part of the water infiltrates to the zone of saturation and then moves downdip through the aquifer. The Catahoula Sandstone and the lower part of the Jasper aquifer crop out north of Montgomery County; in Montgomery County these aquifers are recharged by downdip movement of water from the outcrop area.

The amount of precipitation on the outcrops exceeds the amount that can be transmitted through the aquifers, and a large part of the rainfall runs off into streams. A lesser part of the water that infiltrates to the zone of saturation emerges as spring flow that maintains the base flow of the streams. The base flow is regarded as rejected recharge. As development increases the transmission capacities of the aquifers, the present rejected recharge will move through the aquifers as recharge and the base flow of the streams will be reduced.

Ground water moves from areas of recharge to areas of discharge under the influence of gravity. The general direction of movement is downdip toward the areas of natural or artificial discharge. The rate of movement is dependent upon the hydraulic gradient, the permeability of the aquifer, and the temperature of the water. The rate of general movement is about 20, 40, and 60 feet per year in the upper part of the Jasper, in the Evangeline, and in the Chicot aquifers, respectively. In areas of ground-water withdrawal, ground water moves from all directions into the areas being pumped.

Ground water is discharged naturally and artificially. Natural discharge is by springs, seeps, and transpiration. Artificial discharge is by pumping from wells and by drainage from pits and channels.

# CHEMICAL QUALITY OF GROUND WATER

The chemical constituents in the ground water in Montgomery County originate principally from the soil and rocks through which the water has moved and thus reflect the differences in the mineral content of the geologic formations with which the water has been in contact. The quantities of some constituents, especially sodium and chloride, indicate the extent of removal of connate water by flushing. Generally, the chemical content of the water increases with depth. The temperature of ground water near the land surface is generally about the same as the mean air temperature of the region but increases with depth. General discussions of the quality of ground water are included in A Primer on Water Quality by Swenson and Baldwin (1965) and in the Study and Interpretation of the Chemical Characteristics of Natural Water by Hem (1959). The chemical analyses of water from selected wells are given in Table 10.

Table 4.—Summary of Aquifer Tests in the Upper Part of the Jasper Aquifer in Montgomery and Adjacent Counties

WELL		DATE F TEST	COEFFICIENT OF TRANSMIS- SIBILITY (GPD/FT)	FIELD COEFFICIENT OF PERMEABIL- ITY (GPD/FT <sup>2</sup> )	COEFFICIENT OF STORAGE	TYPE OF TEST	REMARKS
TS-60-45-402	July	24, 1966	41,600	210	1 - 1	Rª/	Measurements by driller. Well pumped at 1200 gpm for 24 hours.
do	July	25, 1966	39,400	200		R	Do.
TS-60-45-503	Apr.	24, 1954	40,600	300		R	Pumped well at 1000 gpm for 24 hours.
TS-60-45-505	June	24, 1942	44,000	300	4.7×10 <sup>-5</sup>	Ip/	Pumped TS-60-45-504 at 440 gpm for 9 hours. Observed drawdown and recovery in TS-60-45-505.
do		do	44,000	300	3.1×10 <sup>-4</sup>		Pumped TS-60-45-506 at 110 gpm for 10 hours. Observed recovery in TS-60-45-505.
TS-60-45-506	June	24, 1942	50,200	280	6.6×10 <sup>-4</sup>	-1	Pumped TS-60-45-504 at 440 gpm for 3½ hours. Observed drawdown in TS-60-45-506.
TS-60-45-507	Nov.	2, 1953	20,500	150	PERMIT	R	Measurements by driller. Well pumped at 750 gpm for 3½ hours.
SB-60-48-202	Dec.	2, 1965	11,300	230		R	Measurements by driller. Well pumped at 600 gpm for 24 hours.
do	Jan.	14, 1966	10,000	200		R	Flowed 60 gpm.

<sup>₫/</sup> Recovery test.

b/ Interference test.

# Relationship of Quality of Water to Use

The major factors that determine the suitability of a water supply are the limitations imposed by the contemplated use of the water. Among the various criteria established for water quality are: bacterial content; physical characteristics, such as temperature, odor, color, and turbidity; and chemical constituents. Usually, the bacterial content and the undesirable physical properties can be alleviated economically, but the removal of undesirable chemical constituents can be difficult and expensive.

The dissolved-solids content is an indication of the chemical quality of the water. A general classification of water based on dissolved-solids content, in mg/l (milligrams per liter), is as follows (modified from Winslow and Kister, 1956):

DESCRIPTION	DISSOLVED-SOLIDS CONTENT (MG/L)
Fresh	Less than 1,000
Slightly saline	1,000 to 3,000
Moderately saline	3,000 to 10,000
Very saline	10,000 to 35,000
Brine	More than 35,000

The U.S. Public Health Service (1962) has established and periodically revises standards of drinking water to be used on common carriers engaged in interstate commerce. The standards are widely accepted for evaluating domestic and public water supplies. According to the standards, chemical constituents should not be present in a public water supply in excess of the listed concentrations shown in the following table, except where other more suitable supplies are not available:

	CONCENTRATION
SUBSTANCE	(MG/L)
Chloride (CI)	250
Fluoride (F)	1.01/
Iron (Fe)	0.3
Nitrate (NO <sub>3</sub> )	45
Sulfate (SO <sub>4</sub> )	250
Dissolved solids	500

 $<sup>1\!\!/</sup>$  Based on annual average of maximum daily air temperature records at Conroe, Texas.

Table 5 is a summary of the source and significance of dissolved-mineral constituents and the properties of water. The quality of water requirements for industrial uses range widely, as almost every industrial requirement has different standards. In general, water used for industry may be placed in three categories—process water, cooling water, and boiler water. Process water is the term used for the water incorporated into or in contact with the manufactured products. Water for cooling and boiler uses should be noncorrosive and relatively free of scale-forming constituents. In boiler water the presence of silica is undesirable because it forms a hard scale or encrustation, the scale-forming tendency increasing with the pressure in the boiler (Moore, 1940, p. 263). Suggested water-quality tolerances for a number of industries have been summarized by Hem (1959, p. 250-254) and Moore (1940).

Several factors other than the chemical quality are involved in determining the suitability of water for irrigation. The type of soil, adequacy of drainage, crops grown, climatic conditions, and quantity of water used have an important bearing on the continued productivity of irrigated land.

A classification for judging the quality of a water for irrigation was proposed in 1954 by the U.S. Salinity Laboratory Staff (1954, p. 69-82). This classification, which is now commonly used, is based on the salinity hazard as measured by the electrical conductivity of the water and the sodium hazard as measured by the SAR (sodium-adsorption ratio). Sodium can be a significant factor in evaluating the quality of irrigation water because water with a high SAR will cause the soil structure to break down by deflocculating the colloidal soil particles. Consequently, the soil can become plastic, thereby causing poor aeration and low water availability. This possibility is especially true of fine-textured soils. Wilcox (1955, p. 15) stated that the system of classification of irrigation waters proposed by the Laboratory Staff "...is not directly applicable to supplemental waters used in areas of relatively high rainfall". Wilcox (1955, p. 16) indicated that generally water may be used safely for supplemental irrigation if its conductivity is less than 2,250 microhos per centimeter at 26°C and its SAR is less than 14.

Another factor in assessing the quality of water for irrigation is the RSC (residual sodium carbonate) in the water. Excessive RSC will cause the water to be alkaline, and the organic material in the soil will tend to dissolve. The soil may become a grayish-black and the land areas affected are referred to as "black alkali". Wilcox (1955, p. 11) states that laboratory and field studies have resulted in the conclusion that water containing more than 2.5 epm (equivalents per million) RSC is not suitable for irrigation. Water containing from 1.25 to 2.5 epm is marginal, and water containing less than 1.25 epm RSC probably is safe. However, the successful use of marginal water for irrigation might be made possible by proper irrigation practices and use of soil

rocks and solls, commonly less than 20 mgl. High concentration and 20 mgl. High concentration of zeolite type water offerencess ally occur in highly alkaline waters.  Iron (Fe)  Dissolved from practically all rocks and solls. May also be and other equipment. More than 1 or 2 mg/l of iron in surface waters from mine drainage or other sources.  Calcium (Ca) and an amparishm (Mg)  Bisolved from practically all solls and carbon and magnesium are found in large quantities in some foundations in an amparishm (K)  Calcium (Na) and potassium (K)  Sodium (Na) and potassium (K)  Sodium (Na) and potassium (K)  Sodium (Na) and potassium (K)  Sulfate (SO <sub>4</sub> )  Dissolved from rocks and solls. Found also in another torine, and everys.  Sulfate (SO <sub>4</sub> )  Dissolved from rocks and solls. Found also in some industrial waters and other sulfur compounds. Commonly present in mine waters and norm in magnesium waters, and other sulfur compounds. Commonly present in mine waters and in some industrial waters.  Chloride (Cl)  Dissolved from rocks and solls. Present in sevenge and found in large amounts in ancient brines, see wetz, and industrial brines.  Pluoride (F)  Dissolved from rocks and solls. Present in sevenge and found in large amounts in ancient brines, see wetz, and industrial brines.  Everyling organic matter, sevenge, fertilizers, and nitrates in soil.  Present in sevenge and found in large amounts in ancient brines, see wetz, and industrial brines.  Everyling organic matter, sevenge, fertilizers, and nitrates in soil.  Placed in a fricking water rock and soils. Added to many waters by fluoridation of municipal supplies.  Pluoride (F)  Dissolved from rocks and soils. Present in sevenge and found in large amounts in ancient brines, see wetz, and industrial wates.  Chloride (Gl)  Dissolved from rocks and soils. Present in sevenge and found in large amounts in ancient brines, see wetz, and industrial			
rocks and solls, commonly less then 30 mgl. "High cencentra- silv occur in highly alkaline waters.  Iron (Fe)  Disolved from precically all rocks and solls water of the soll	OR	SOURCE OR CAUSE	SIGNIFICANCE
rocks and soils. May also be derived from iron pipes, pumps, and every form from pipes, pumps, and the service of the processes of the process	Silica (SiO <sub>2</sub> )	rocks and soils, commonly less than 30 mg/l. High concentra- tions, as much as 100 mg/l, gener- ally occur in highly alkaline	Forms hard scale in pipes and boilers. Carried over in steam of high pressure boilers to form deposits on blades of turbines. Inhibits deterioration of zeolite-type water softeners.
and rocks, but especially from limetons, and gypsum, but the provided of the p	Iron (Fe)	rocks and soils. May also be derived from iron pipes, pumps, and other equipment. More than 1 or 2 mg/l of iron in surface waters generally indicates acid wastes from mine drainage or	On exposure to air, iron in ground water oxidizes to reddish- brown precipitate. More than about 0.3 mg/lstains laundry and utensils reddish-brown. Objectionable for food processing, tex- tile processing, beverages, ice manufacture, brewing, and other processes. U.S. Public Health Service (1962) drinking-water standards state that iron should not exceed 0.3 mg/l. Larger quantities cause unpleasant taste and favor growth of iron bacteria.
rocks and solis. Found also in anient brines, sea water, industrial brines, and sewage.  Bicarbonate (HCO <sub>3</sub> ) and carbonate (CO <sub>3</sub> ) Action of carbon dioxide in water on carbonate rocks such as limestone and dolomite.  Bicarbonate (CO <sub>3</sub> )  Action of carbon dioxide in water on carbonate rocks such as limestone and dolomite.  Bicarbonate (CO <sub>3</sub> )  Dissolved from rocks and soils containing appsum, iron sulfides, and other sulfur compounds, and in some industrial wastes.  Chloride (CI)  Dissolved from rocks and soils containing appsum, iron sulfides, and other sulfur compounds, and in some industrial wastes.  Chloride (CI)  Dissolved from rocks and soils containing appsum, iron sulfides, and other sulfur compounds, and the sulfur compounds and the sulfur compounds, and the sulfur compounds an		and rocks, but especially from limestone, dolomite, and gypsum. Calcium and magnesium are found in large quantities in some brines. Magnesium is present in	Cause most of the hardness and scale-forming properties of water; soap consuming (see hardness). Waters low in calcium and magnesium desired in electroplating, tanning, dyeing, and in textile manufacturing.
and carbonate (CO3)  on carbonate rocks such as limestone and dolomite.  on carbonate rocks such as limestone and dolomite.  Sulfate (SO4)  Dissolved from rocks and soils containing gypsum, iron sulfides, and other sulfur compounds. Commonly present in mine waters and in some industrial wastes.  Chloride (CI)  Dissolved from rocks and soils. Present in is sewage and found in large amounts in sewage and found in large amounts in sewage and found in large amounts in some industrial brines, sea water, and industrial brines.  Fluoride (F)  Dissolved in small to minute quantities from most rocks and soils. Added to many waters by fluoridation of municipal supplies.  Nitrate (NO3)  Decaying organic matter, sewage, fertilizers, and nitrates in soil.  Piloride (NO3)  Decaying organic matter, sewage, fertilizers, and nitrates in soil.  Chiefly mineral constituents disabled to the solution was and soils. Includes some water of crystallization.  Dissolved soilds  Chiefly mineral constituents disabled to the solution was and soils. Includes some water of crystallization.  Mineral content of the water.  Specific conductance (micromhos at 25°C)  Mineral content of the water.  Acids, acid-generating salts, and free carbon dioxide lower the p.H. Carbonates, blicarbonates, hydrox, lides, and broades and broad		rocks and soils. Found also in ancient brines, sea water, indus-	Large amounts, in combination with chloride, give a salty taste. Moderate quantities have little effect on the usefulness of water for most purposes. Sodium salts may cause foaming in steam boilers and a high sodium content may limit the use of water for irrigation.
containing ypsum, iron sulfides, and other sulfur compounds, Commonly present in mine waters and in some industrial waters.  Chloride (Cl)  Chloride (Cl)  Dissolved from rocks and soils, Present in sewage and found in large amounts in ancient brines, sea water, and industrial brines.  Dissolved in seall to minute quantities from most rocks and soils. Added to many waters by fluoridation of municipal supplies.  Nitrate (NO3)  Dissolved in minute quantities from most rocks and soils. Added to many waters by fluoridation of municipal supplies.  Nitrate (NO3)  Decaying organic matter, sawage, fertilizers, and nitrates in soil.  Chiefly mineral constituents dissolved from rocks and soils. Includes some water of crystallization.  Chiefly mineral constituents dissolved from rocks and soils. Includes some water of crystallization.  Chiefly mineral constituents dissolved from rocks and soils. Includes some water of crystallization.  Chiefly mineral constituents dissolved from rocks and soils. Includes some water of crystallization.  Chiefly mineral constituents dissolved from rocks and soils. Includes some water of crystallization.  Chiefly mineral constituents dissolved from rocks and soils. Includes some water of crystallization.  Chiefly mineral constituents dissolved from rocks and soils. Includes some water of crystallization.  Chiefly mineral constituents dissolved from rocks and soils. Includes some water of crystallization.  Chiefly mineral constituents dissolved from rocks and soils. Includes some water of crystallization.  Chiefly mineral constituents dissolved from rocks and soils. Includes some water of crystallization.  Chiefly mineral constituents dissolved from rocks and soils. Includes some water of crystallization.  Chiefly mineral constituents dissolved from rocks and soils. Includes some water of crystallization.  Chiefly mineral constituents dissolved from rocks and soils. Includes some water of conductance in most waters nearly all the hardness is due to calcium and magnesium. All the metallic actio		on carbonate rocks such as lime-	Bicarbonate and carbonate produce alkalinity. Bicarbonates of calcium and magnesium decompose in steam boilers and hot water facilities to form scale and release corrosive carbon dioxide gas. In combination with calcium and magnesium, cause carbonate hardness.
Present in sewage and found in large amounts in ancient brines, sea water, and industrial brines.  Fluoride (F)  Dissolved in small to minute quantities from most rocks and soils. Added to many waters by fluoridation of municipal supplies.  Pluoride in drinking water reduces the incidence of tooth de when the water is consumed during the period of enal amount of drinking water consumed, and succeptibility of individual. (Maler, 1950)  Nitrate (NO3)  Decaying organic matter, sewage, fertilizers, and nitrates in soil.  Dissolved solids  Chiefly mineral constituents dissolved from rocks and soils, includes some water of crystallization.  Chiefly mineral constituents dissolved from rocks and soils, includes some water of crystallization.  Line waters nearly all the hardness is due to calcium and magnesium. All the metallic cations other than the alkali metals also cause hardness.  Specific conductance (micromhos at 25°C)  Mineral content of the water.  Present in ancient brines, sewage, and found in account of drinking water reduces the incidence of tooth de when the water is consumed during the period of enal accidification. However, it may cause mostling of the text depending on the concentration of fluoride, the age of the che when the water is consumed during the period of enal accidification. However, it may cause mostling of the text depending on the concentration of the star place.  Concentration much greater than the local average may sugging intition of the standard suggest a limit of 45 mg/l. Waters of high nitrogeness we content to be the cause of methemotopic manual place in depending on the concentration of the star place in depending on the concentration of the star place in depending on the concentration of the water of crystallization. Specific conductance in the constituents.  Chiefly mineral constituents dissolution was a publicate and carbonate hardness. Any hardness in excess of this pipes. Hardness calculated carbonate hardness. Waters of hardness as much as ppm are considered soft, 61 to 120 m	Sulfate (SO <sub>4</sub> )	containing gypsum, iron sulfides, and other sulfur compounds. Commonly present in mine waters	Sulfate in water containing calcium forms hard scale in steam boilers. In large amounts, sulfate in combination with other ions gives bitter taste to water. Some calcium sulfate is considered beneficial in the brewing process, U.S. Public Health Service (1962) drinking-water standards recommend that the sulfate content should not exceed 250 mg/l.
when the water is consumed during the period of enal calcification. However, it may cause mottling of the text depending on the concentration of fluoride, the age of the chamount of drinking water consumed, and susceptibility of individual. (Maler, 1950)  Nitrate (NO3)  Decaying organic matter, sewage, fertilizers, and nitrates in soil.  Decaying organic matter, sewage, fertilizers, and nitrates in soil.  Concentration much greater than the local average may suggiously a standards suggest a limit of 45 mg/l. Waters of high nitrontent have been reported to be the cause of methemous on the been reported to be the cause of methemous on the local infant feeding. Nitrate has been shown to helpful in reducing inter-crystalline cracking of boiler steel encourage growth of algae and other organisms which produndsirable tastes and odors.  Chiefly mineral constituents dissolved from rocks and soils. Includes some water of crystallization.  Chiefly mineral constituents dissolved from rocks and soils. Includes some water of crystallization.  In most waters nearly all the hardness is due to calcium and magnesium. All the metallic cations other than the alkali metals also cause hardness.  Mineral content of the water.  Specific conductance (micromhos at 25°C)  Mineral content of the water.  Mineral content of the water.  Acids, acid-generating salts, and free carbon dioxide lower the p-H. Carbonates, bicarbonates, hydroxides, and phosphates, silicates, and borates raises the p-H.  Acarbonates, bicarbonates, hydroxides, and phosphates, silicates, and borates raises the p-H.  Acorponates, bicarbonates, hydroxides, and borates raises the p-H.  Acids acid-generating salts, and free carbon dioxide lower the p-H. Carbonates, bicarbonates, hydroxides, and phosphates, salicates, and borates raises the p-H.	Chloride (CI)	Present in sewage and found in large amounts in ancient brines,	In large amounts in combination with sodium, gives salty taste to drinking water. In large quantities, increases the corrosiveness of water. U.S. Public Health Service (1962) drinking-water standards recommend that the chloride content should not exceed 250 mg/l.
fertilizers, and nitrates in soil.  pollution. U.S. Public Health Service (1962) drinking-war standards suggest a limit of 45 mg/l. Waters of high nitr content have been reported to be the cause of methemore binemia (an often fatal disease in infants) and therefore sho not be used in infant feeding. Nitrate has been shown to helpful in reducing inter-crystalline cracking of boiler steel encourages growth of algae and other organisms which produndesirable tastes and odors.  Chiefly mineral constituents dissolved from rocks and soils. Includes some water of crystallization.  Chiefly mineral constituents dissolved from rocks and soils. Includes some water of crystallization.  Public Health Service (1962) drinking-water stands recommend that waters containing more than 500 mg/l dissolved solids unsuitable for many purposes.  U.S. Public Health Service (1962) drinking-water stands recommend that waters containing more than 500 mg/l dissolved solids unsuitable for many purposes.  U.S. Public Health Service (1962) drinking-water stands recommend that waters containing more than 500 mg/l dissolved solids unsuitable for many purposes.  Consumes soap before a lather will form. Deposits soap curd bathtubs. Hard water forms scale in boilers, water heaters, a called non-carbonate hardness. Any hardness in excess of this bathtubs. Hard water forms scale in boilers, water heaters, a called non-carbonate hardness. Any hardness in excess of the table to 180 mg/l, moderately hard; to 180 mg/l, hard; more than 180 mg/l, very hard.  Specific conductance (micromhos at 25°C)  Mineral content of the water.  Mineral content of the water.  Indicates degree of mineralization. Specific conductance i measure of the capacity of the water to conduct an electure of the capacity of the water to conduct an electure of the capacity of the water to conduct an electure of the capacity of the water to conduct an electure of the capacity of the water to conduct an electure of the capacity of the water to conduct an electure of the capacity of the w	Fluoride (F)	quantities from most rocks and soils. Added to many waters by fluoridation of municipal sup-	Fluoride in drinking water reduces the incidence of tooth decay when the water is consumed during the period of enamel calcification. However, it may cause mottling of the teeth, depending on the concentration of fluoride, the age of the child, amount of drinking water consumed, and susceptbility of the individual. (Maier, 1950)
solved from rocks and soils. Includes some water of crystallization.  Hardness as CaCO3  In most waters nearly all the hardness is due to calcium and magnesium. All the metallic cations other than the alkali metals also cause hardness.  Specific conductance (micromhos at 25°C)  Mineral content of the water.  Hydrogen ion concentration (pH)  Acids, acid-generating salts, and free carbon dioxide lower the pH. Carbonates, bicarbonates, and phosphates, and borates raise the pH.  Solved from rocks and soils. Includes some water of crystallization. Specific to the bused if other less mineralized supplies are availat Waters containing more than 500 mg/l dissolved solids unsuitable for many purposes.  Consumes soap before a lather will form. Deposits soap curd bathtubs. Hard water forms scale in boilers, water heaters, a pipes. Hardness equivalent to the bicarbonate and carbonate called non-carbonate hardness. Waters of hardness as much as ppm are considered soft; 61 to 120 mg/l, moderately hard; to 180 mg/l, hard; more than 180 mg/l, very hard.  Indicates degree of mineralization. Specific conductance in measure of the capacity of the water to conduct an election concentration (pH)  A pH of 7.0 indicates neutrality of a solution. Values higher the constituents.  A pH of 7.0 indicates neutrality of a solution. Values higher the constituents.  A pH of 7.0 indicates neutrality of a solution of the activity of hydrogen lons. Corrosiveness of water generally increases we decreasing pH. However, excessively alkaline waters may a decreasing ph. However, excessively alkaline waters availated waters containing more than 1000 mg/l dissolved solids unsuitable for many purposes.  Consumes soap before a lather will form. Deposits soap curd bathtubs. Hard water forms scale in boilers, water heaters, a pipes. Hardness equivalent to the bicarbonate and carbonate called on-carbonate hardness. Waters of hardness as much as ppm are considered soft; 61 to 120 mg/l, hard; more than 180 mg/l, beta forms and called carbonate hardness.  A pH	Nitrate (NO <sub>3</sub> )	Decaying organic matter, sewage, fertilizers, and nitrates in soil.	Concentration much greater than the local average may suggest pollution. U.S. Public Health Service (1962) drinking-water standards suggest a limit of 45 mg/l. Waters of high nitrate content have been reported to be the cause of methemoglobinemia (an often fatal disease in infants) and therefore should not be used in infant feeding. Nitrate has been shown to be helpful in reducing inter-crystalline cracking of boiler steel. It encourages growth of algae and other organisms which produce undesirable tastes and odors.
hardness is due to calcium and magnesium. All the metallic cations other than the alkali metals also cause hardness.  Specific conductance (micromhos at 25°C)  Hydrogen ion concentration (pH)  Acids, acid-generating salts, and free carbon dioxide lower the pH. Carbonates, blicarbonates, blicarbonates, blicarbonates, blicarbonates, blicarbonates, blicarbonates, blicarbonates, blicarbonates, and borates raise the pH.	Dissolved solids	solved from rocks and soils. Includes some water of crystalli-	U.S. Public Health Service (1962) drinking-water standards recommend that waters containing more than 500 mg/l dissolved solids not be used if other less mineralized supplies are available. Waters containing more than 1000 mg/l dissolved solids are unsuitable for many purposes.
(micromhos at 25°C)  Hydrogen ion concentration (pH)  Acids, acid-generating salts, and free carbon dioxide lower the pH. Carbonates, bicarbonates, hydroxides, and phosphates, and borates raise the pH.	Hardness as CaCO <sub>3</sub>	hardness is due to calcium and magnesium. All the metallic cations other than the alkali	Consumes soap before a lather will form. Deposits soap curd on bathtubs. Hard water forms scale in boilers, water heaters, and pipes. Hardness equivalent to the bicarbonate and carbonate is called carbonate hardness. Any hardness in excess of this is called non-carbonate hardness. Waters of hardness as much as 60 ppm are considered soft; 61 to 120 mg/l, moderately hard; 121 to 180 mg/l, hard; more than 180 mg/l, very hard.
concentration (pH)  free carbon dioxide lower the pH. Carbonates, bicarbonates, hydroxides, and phosphates, silicates, and borates raise the pH.  carbonates, bicarbonates, hydroxides, and phosphates, silicates, and borates raise the pH.  decreasing alkalinity; values lower than 7.0 indic increasing acidity. pH is a measure of the activity of hydrogen ions. Corrosiveness of water generally increases we decreasing pH. However, excessively alkaline waters may a		Mineral content of the water.	Indicates degree of mineralization. Specific conductance is a measure of the capacity of the water to conduct an electric current. Varies with concentration and degree of ionization of the constituents.
		free carbon dioxide lower the pH. Carbonates, bicarbonates, hydrox- ides, and phosphates, silicates,	A pH of 7.0 indicates neutrality of a solution. Values higher than 7.0 denote increasing alkalinity; values lower than 7.0 indicate increasing acidity. pH is a measure of the activity of the hydrogen ions. Corrosiveness of water generally increases with decreasing pH. However, excessively alkaline waters may also attack metals.

amendments. Furthermore, the degree of leaching will modify the permissible limit to some extent (Wilcox, Blair, and Bower, 1954, p. 265).

Boron is essential to proper plant nutrition, but an excessive boron content will make water unsuitable for irrigation. Wilcox (1955, p. 11) indicated that a boron concentration of as much as 1.0 mg/l is permissible for irrigating sensitive crops.

# Water Quality in the Hydrologic Units

Fresh water in Montgomery County is generally free of excessive chemical constituents that are harmful to health, and is therefore suitable for public supply and domestic use. Though water-quality demands of various industries are different (Collins, 1926; Conklin, 1956; Hem, 1959; Mussey, 1955 and 1957), ground water in Montgomery County is generally suitable for industrial use. The water is also suitable for irrigation because it generally contains low concentrations of toxic constituents, and the soils are generally sandy and well drained. Records of laboratory analyses of water from wells in Montgomery and adjacent counties are given in Table 10. Records of field analyses are given in Table 11.

#### Catahoula Sandstone

Electrical-log interpretations indicate that fresh water-bearing sands are present in the Catahoula Sandstone in the northern and central part of Montgomery County (Figure 6). Where fresh water is present in the Catahoula, it is generally overlain by slightly or moderately saline water. The maximum thickness of sand containing fresh water is 160 feet, which occurs about 5 miles northwest of Willis. The average fresh-water sand thickness in the county is about 100 feet. The maximum thickness of sand containing slightly saline water is 200 feet, which occurs northwest of the town of Montgomery. Natural gas is present in the fresh and slightly saline water-bearing sand on the flanks of the Conroe Dome.

#### Lower Part of the Jasper Aquifer

Electrical-log interpretations indicate that as much as 270 feet of fresh water-bearing sand is present in the lower part of the Jasper aquifer in the northern and central parts of the county. Slightly saline water is also present in the aquifer as shown on Figure 8.

## Upper Part of the Jasper Aquifer

The upper part of the Jasper aquifer contains water that is generally fresh, hard, and alkaline. Samples from wells 725 feet or less in depth were of the calcium bicarbonate type; those from wells 1,100 feet or more in

depth were of the sodium bicarbonate type. Dissolved-solids content ranged from 49 to 665 mg/l, but in most of the samples ranged from 300 to 500 mg/l. Most of the samples had a pH ranging from 7.5 to 8.0. Hardness ranged from 10 to 258 mg/l, but generally ranged from 60 to 180 mg/l. Very hard water is found in wells in the outcrop area and south of the outcrop in a belt about 15 miles wide. Wells south of this belt yield soft water.

Electrical logs indicate that there are areas in the southern part of the county where slightly saline water is present in the upper part of the Jasper aquifer. The locations of these areas are shown on Figure 9.

Temperatures of water from 38 flowing or pumped wells screened in the Evangeline aquifer and in the upper part of the Jasper aquifer indicate a thermal increase of about 1°C per 125 feet increase in depth (1°F per 70 feet). However, a larger gradient exists near the Humble Dome. Based on the thermal gradient, fresh water as warm as 35°C (95°F) is probably present at the base of the upper part of the Jasper aquifer.

## Burkeville Aquiclude

Only one water well, TS-60-34-502, completed in sands within the Burkeville aquiclude was sampled in Montgomery County. Electrical-log interpretations indicate that as much as 65 feet of fresh water-bearing sand is present in the aquiclude. However, this sand is discontinuous because the Burkeville is mostly clay.

#### **Evangeline Aquifer**

Analyses of water from wells in the Evangeline aquifer indicate that water in this unit is generally fresh and hard, with the hardest water occurring in or near the outcrop area. Electrical-log interpretations indicate that water in the aquifer is fresh throughout most of the county. Dissolved solids ranged from 66 to 3,420 mg/l. However, most of the samples had a dissolved-solids content that ranged from 250 to 400 mg/l.

Only three samples had dissolved-solids content greater than 700 mg/l. Two came from wells (TS-60-53-302 and TS-60-53-311) in areas of abandoned salt-water disposal pits, and the other came from a well (LJ-65-06-305) near the Humble Dome. Hardness ranged from 21 to 1,890 mg/l, but the range for most samples was from 60 to 180 mg/l. Hardness exceeded 500 mg/l in samples from two wells (TS-60-53-302 and TS-60-53-311) in areas of abandoned salt-water disposal pits. All of the soft water came from wells south of the outcrop area. The samples that had a dissolved-solids content greater than 400 mg/l, but less than 700 mg/l came from wells developed in or near the outcrop area.

The pH of the water samples ranged from 5.5 to 8.2, but most of the samples had a pH of 6.5 to 7.5. Samples with a pH of less than 6.5 came from shallow wells south of the outcrop area.

## **Chicot Aquifer**

Water from the Chicot aquifer is generally soft and fresh. Hardness ranged from 8 to 140 mg/l, but was generally less than 60 mg/l. The pH ranged from 5.0 to 7.5, but most of the samples had a pH of 5.0 to 6.7. Dissolved solids ranged from 36 to 268 mg/l, but most of the samples had a dissolved-solids content of less than 150 mg/l.

# **Water-Quality Problems**

Although most of the water contained in the upper part of the Jasper, the Evangeline, and the Chicot aquifers is fresh, some water-quality problems, involving waters that are hard, corrosive, or iron-bearing, exist in Montgomery County. All of these problems can be effectively eliminated by proper well-completion methods or water treatment.

The most popular treatment for hardness is the use of an ion exchange or zeolite softener. A cold lime-soda softening precipitator may be used to remove hardness, iron, and manganese. Treatment for water hardness is not commonly used in Montgomery County because the people have become adjusted to using hard water, and industrial water usage is still slight.

Corrosive (acidic) ground waters are found in the Evangeline and Chicot aquifers. Such water may corrode pump parts (Figure 14), plumbing fixtures, and iron casings in less than a year of contact. Table 11 shows field measurements of pH and other parameters.

There are two possible sources of iron in water in Montgomery County. One source is the solution of iron from ferruginous sands and gravels. The other source is corrosion of well casings and water distribution systems by water of low pH.

To alleviate the problem of iron caused by acidic water acting on ferrous metal, materials such as fiber-glass, stainless steel, or plastics may be used in the construction of the well and distribution system. Iron may be removed by aeration, which precipitates the iron, and by filtration which removes the precipitate from the water. Various lime and oxidizing filters may also be used to treat water with high iron content.

### Disposal of Oil-Field Brines

According to data obtained from the files of the Texas Railroad Commission (Texas Water Commission

and Texas Water Pollution Control Board, 1963), about 26 million barrels of oil-field brine was produced in Montgomery County during 1961. Of this total, 9.2 percent was disposed of by miscellaneous means, 4.3 percent was diverted to surface pits, and 86.5 percent was disposed of by injection through wells that penetrated deep formations.

The disposal pits in Montgomery County have been located generally in sandy soils. Some of these pits were abandoned because overflow of the brine tended to destroy vegetation and to contaminate nearby streams. Seepage from the pits contaminates shallow ground water. A large number of these pits once existed in the Conroe Oil Field, and shallow sands in some areas of abandoned pits still contain brine. A water sample from well TS-60-53-311 completed in one such area contained 2,140 mg/l chloride. The Texas Railroad Commission issued orders, effective January 1, 1969, to close all salt-water disposal pits in the State.

The disposal of oil-field brines has not resulted in widespread damage to the chemical quality of the ground-water supplies in Montgomery County, but damage has occurred in local areas. Considerable care is currently exercised in the disposal of brines and other municipal and industrial wastes.

# Protection of Water Quality in Oil-Field Drilling Operations

The Texas Railroad Commission requires that drilling contractors use casing and cement or by alternative protection devices to protect fresh-water strata from contamination. In recent years, the Texas Water Development Board has made recommendations to the oil operators and the Railroad Commission on the depths to which the water of usable quality should be protected. Where oil or gas fields are established, the recommended depths are incorporated in the field rules. Figure 15 shows the depth of protection required by the Texas Railroad Commission and the depth of fresh to slightly saline water in various oil fields in Montgomery County. The water-bearing strata in the older fields are, in general, not as well protected as in the more recently developed fields.

## DEVELOPMENT OF GROUND WATER

## **Use of Ground Water**

During the early days of settlement of Montgomery County, the only water used was for domestic and livestock purposes. This water was drawn from shallow dug wells, natural and developed springs and ponds, and streams. Deussen (1914, p. 306) reported that as early as 1901, deep wells had been drilled to supply the steam boilers of locomotives. The

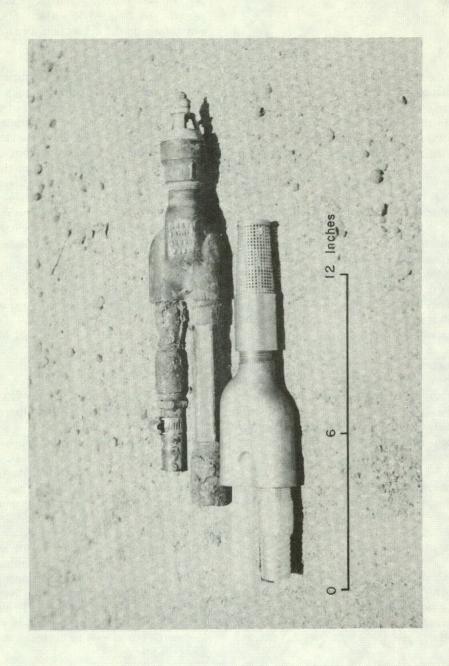


Figure 14
Comparison of New and Corroded Check Valves

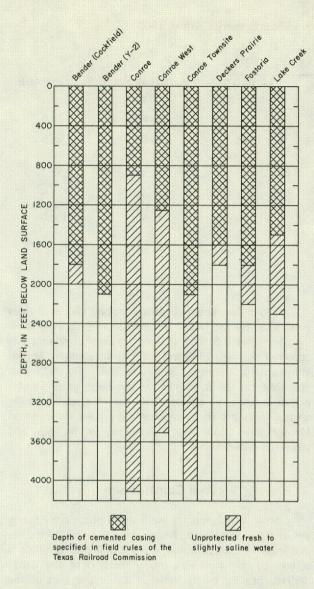


Figure 15.—Comparison Between Depth of Sands Containing Fresh to Slightly Saline Water and the Depth of Protection Required in Oil Fields in Montgomery County

earliest reported deep wells were drilled in towns that had railroad switches, such as Fostoria, Wilburton, Esperanza, Conroe, Tamina, and Splendora. The search for oil brought in many flowing water wells, some of which are still in use.

During the period 1910-43, ground water was developed for public supply, saw mills, railroads, oil and gas production, and pipeline stations. By the mid-1950's, the city of Conroe developed a well field, and recreational camps and clubs used drilled wells. By 1960, a few petroleum-related industries moved near Conroe and developed deep wells. The most recent ground-water developers are the small communities and real estate subdivisions.

The use of ground water has increased with the increase in population and industry. In 1850, probably less than 0.5 mgd (million gallons per day) of ground

water was withdrawn. In 1900, about 3.5 mgd was produced; in 1940, about 4.7 mgd was withdrawn. About 6.2 mgd was pumped from ground-water aquifers in Montgomery County in 1966. Table 6 shows, by aquifers, the quantity of ground water that was pumped for public supply, rural domestic and livestock, industrial, and irrigation uses in the county in 1966. The figures are based on population data and industrial usage estimates. About 81 percent of the ground water withdrawal in 1966 was for public supply, domestic supply, and livestock uses; about 18 percent was for industrial use, and 1 percent for irrigation. The upper part of the Jasper supplied 3.50 mgd; the Evangeline, 2.64 mgd; and the Chicot, 0.05 mgd.

## Water-Level Declines and Land-Surface Subsidence

Periodic measurements of water levels have been made in Montgomery County since 1931 (Tables 7 and 9). According to Deussen (1914, p. 304-306). Livingston (1939, p. 1-6), and Rose (1943, p. 2-17), wells completed in the upper part of the Jasper aquifer in the early 1900's flowed as much as 750 gpm. Static water levels in these wells at that time were as follows: about 45 feet above land surface at Tamina, 20 feet above land surface at Conroe and Dobbin, and 25 feet above land surface at Fostoria. By the mid-40's, many of the wells at Conroe stopped flowing, and in 1967, some water levels were 30 feet below land surface. However, some of the wells still flow. Static water levels in the flowing wells in 1966-67 are as follows: about 20 feet above land surface at Tamina, 10 feet above land surface at Dobbin, and 5 feet above land surface at Fostoria. Since development began, water levels have declined as much as 50 feet in wells tapping the upper part of the Jasper aquifer at Conroe, 10 feet at Dobbin, 20 feet at Fostoria, and 25 feet at Tamina. Figure 16 shows the fluctuations of water levels in two wells completed in the upper part of the Jasper aquifer at Conroe. The long-term decline of these water levels is probably related to pumpage, but variations in average rainfall may cause short-term fluctuations.

Figure 17 shows the approximate altitude of water levels in wells screened in the upper part of the Jasper aquifer, based on measurements made in the 1966-67 period. The average hydraulic gradient is 2.7 feet per mile.

Water levels have declined in wells completed in the Evangeline aquifer. According to Deussen (1914, p. 304-306), Livingston (1939, p. 1-6), and Rose (1943, p. 2-17), water levels in wells developed in this aquifer at Fostoria and Tamina were about 10 and 5 feet above land surface in the 1900's, but these wells no longer flow. Many wells completed in this aquifer in the Conroe Oil Field during the 1930's and 1940's flowed, but by the early 1950's, many of them stopped flowing. Since

Table 6.—Estimated Use of Ground Water in Montgomery County, 1966

		AQUIFER (MGD)			
USE	UPPER PART OF JASPER	EVANGELINE	СНІСОТ	TOTAL (MGD)	PERCENTAGE
Public supply	2.28	0.07		2.35	37.9
Rural domestic and livestock	.53	2.07	0.05	2.65	42.9
Industrial	.69	.44		1.13	18.2
Irrigation		.061⁄		.061/	1.0
Totals	3.50	2.64	0.05	6.19	100.0

<sup>1/2 70</sup> acre-feet, from 1964 records (Gillett and Janca, 1965, p. 20).

development began, water levels in wells tapping the Evangeline aquifer have declined as much as 50 feet at Fostoria and 35 feet at Tamina.

Figures 18 and 19 show the altitude of water levels in wells in the Evangeline aquifer measured in 1942-43 and 1966-67. The average hydraulic gradient increased from 4.3 to 5.4 feet per mile from 1943 to 1967. Water levels declined 10 to 25 feet in the Conroe area and 40 to 50 feet in the southeastern part of the county. The rate of water-level decline in the southeastern part of the county was as much as 2.1 feet per year. The areas of pumpage changed very little. Pumpage from the Evangeline increased about 0.5 mgd to 2.5 mgd between 1943 and 1967. Ground water taken from the "Heavily Pumped Layer" in Harris County, the equivalent of the Evangeline in Montgomery County, has lowered water levels in wells tapping the Evangeline aquifer in the southeastern part of Montgomery County.

Water levels in the Chicot aquifer, which are closely related to fluctuations of recharge, do not show a long-term trend. Figure 12 shows water levels in wells completed in the aquifer. The average hydraulic gradient is about 3.8 feet per mile. Figure 20 shows the fluctuation of selected water levels in a well tapping the Chicot at Conroe.

Water-level declines have caused some subsidence of the land surface in the southern part of Montgomery County. Withdrawal of water from the artesian aquifers results in an immediate decrease in the hydraulic pressure in the aquifers. The resulting pressure difference between the sands and clays causes water to move from the clays into the sands, and the clays are compressed. Some of the clay particles are permanently rearranged and the clay is permanently compacted. As compression and compaction of the beds occur, the land surface subsides (Winslow and Doyel, 1954; Winslow and Wood, 1959).

Slight decreases of altitude along the level lines established by the U.S. Coast and Geodetic Survey show that less than 0.5 foot of land surface subsidence has occurred between 1943 and 1964 in the southern half of Montgomery County (Gabrysch, 1967, fig. 19). This probably has been caused by the large ground-water withdrawals in the adjacent Houston district. However, greater amounts of subsidence may have occurred in Montgomery County in the vicinity of oil, gas, and salt-water withdrawals.

#### **Well Construction**

Most large capacity wells in Montgomery County are in the Conroe area. When a well is to be drilled for municipal or industrial use, a small diameter test hole is drilled by the hydraulic-rotary method to the depth desired, usually to the base of the upper part of the Jasper aquifer. During drilling, formation samples are collected, and upon completion of the test holes, an electrical log may be run.

If the data collected indicate favorable conditions, the test hole is reamed from 16 to 24 inches in diameter from the surface to or near the top of the first sand to be screened. A 12- to 20-inch diameter casing, called the pump pit, or surface casing, is installed and cemented into place. The section of sand to be screened is then reamed to a large diameter hole (about 30 inches) using the largest reamer that can pass the surface casing. The screen is then installed and the bottom of the screen is closed off with a back-pressure valve.

The wells are finished with a perforated section of pipe 6 to 14 inches in diameter that has been wrapped with stainless steel wire (fiberglass was used in a recently completed well, TS-60-45-605, for the casing below the pump pit and the well screen). In gravel-packed wells, the openings in the screen range from 0.040 to 0.050 inches in diameter. This opening is larger than the

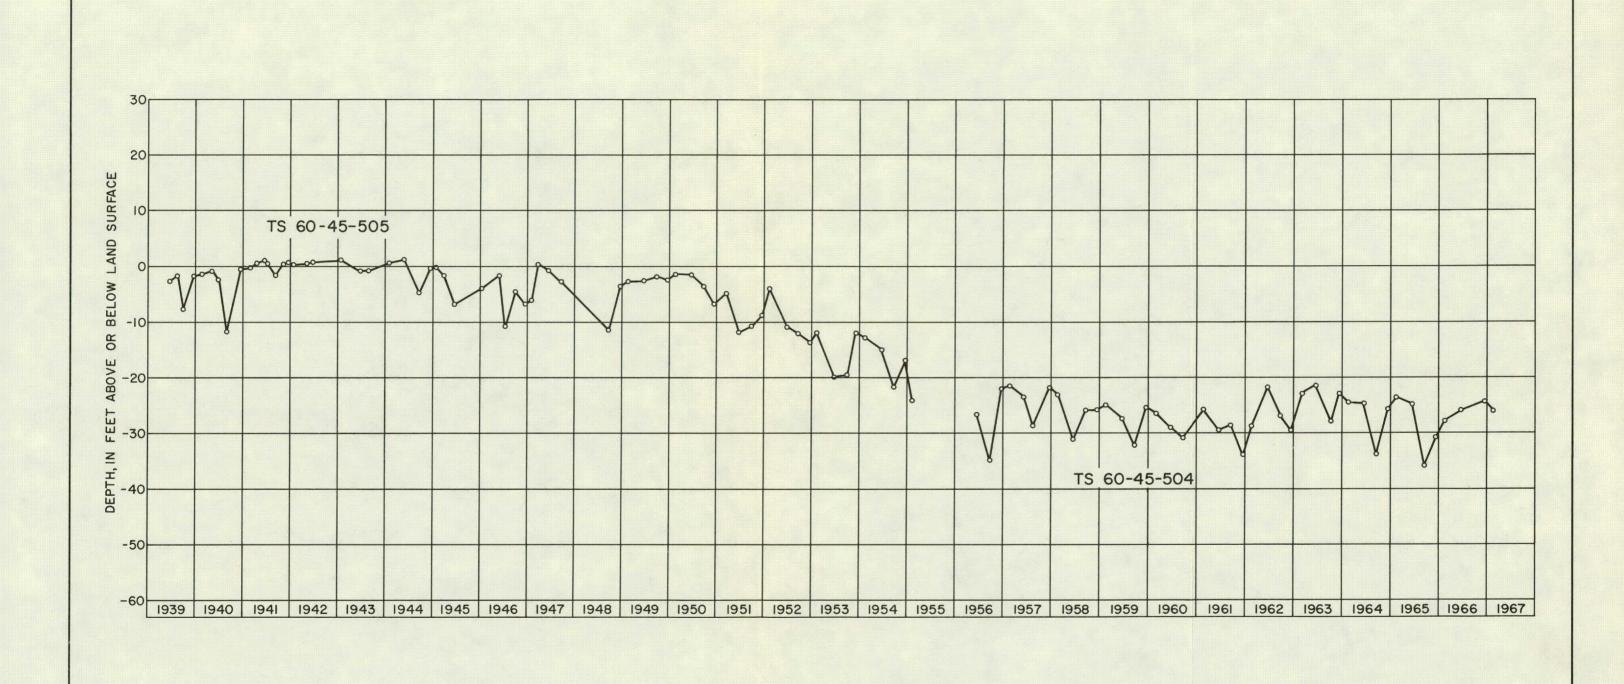
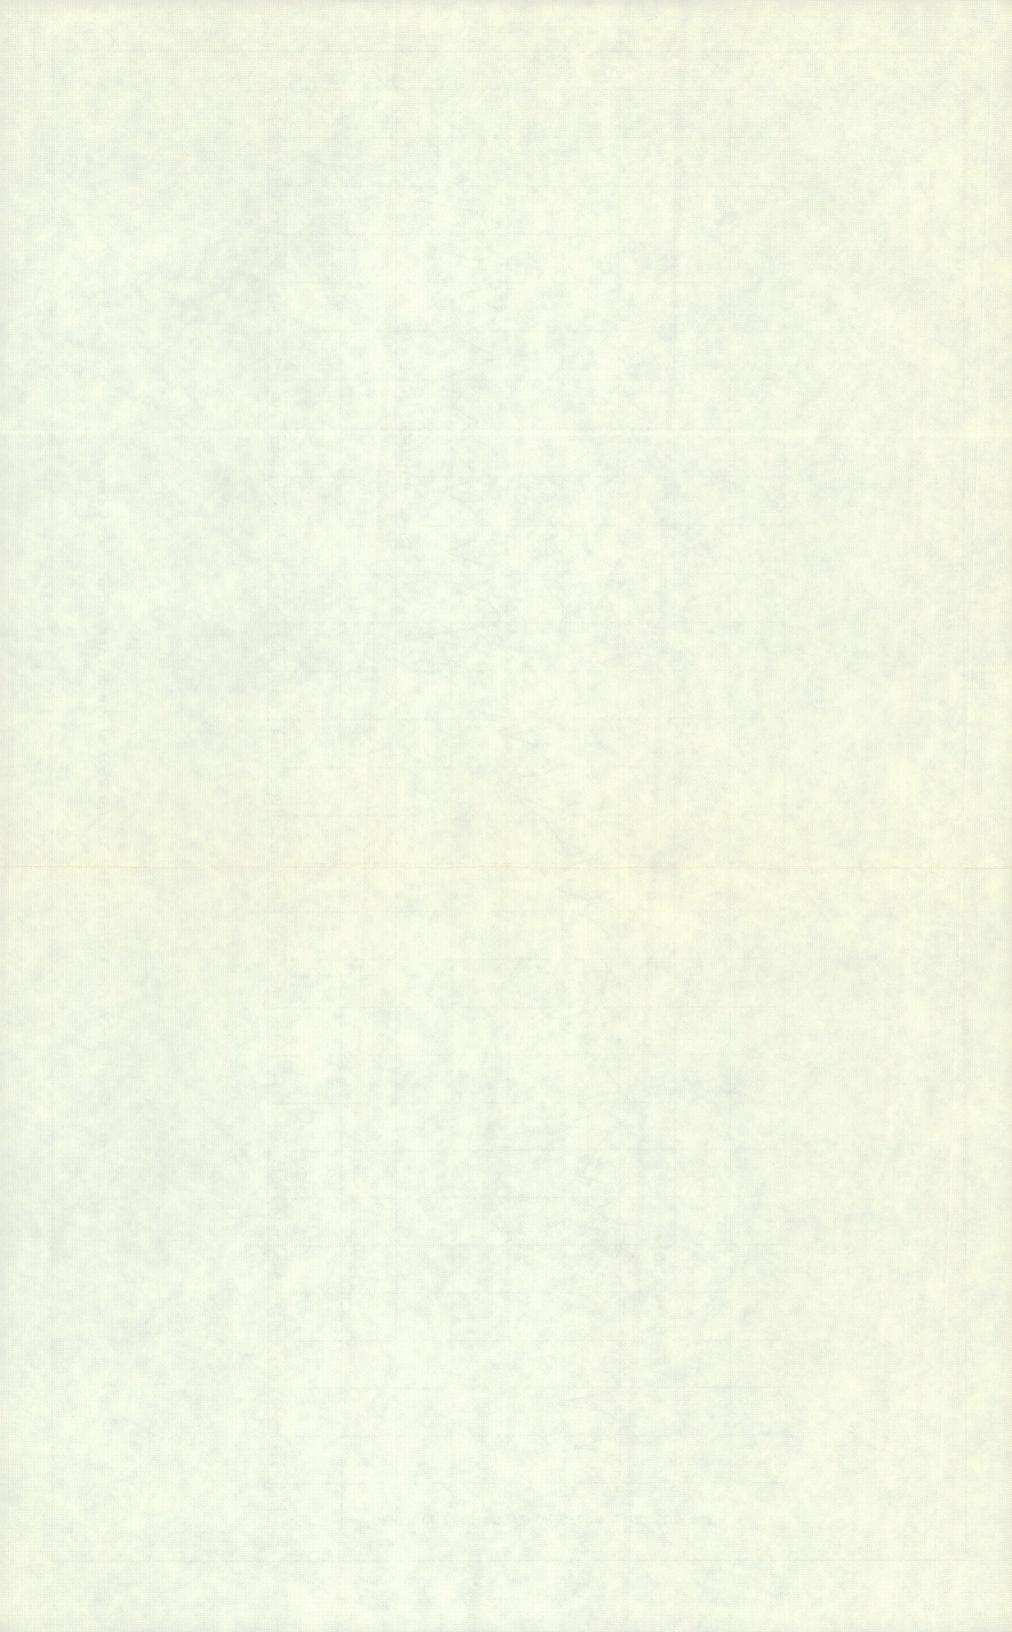
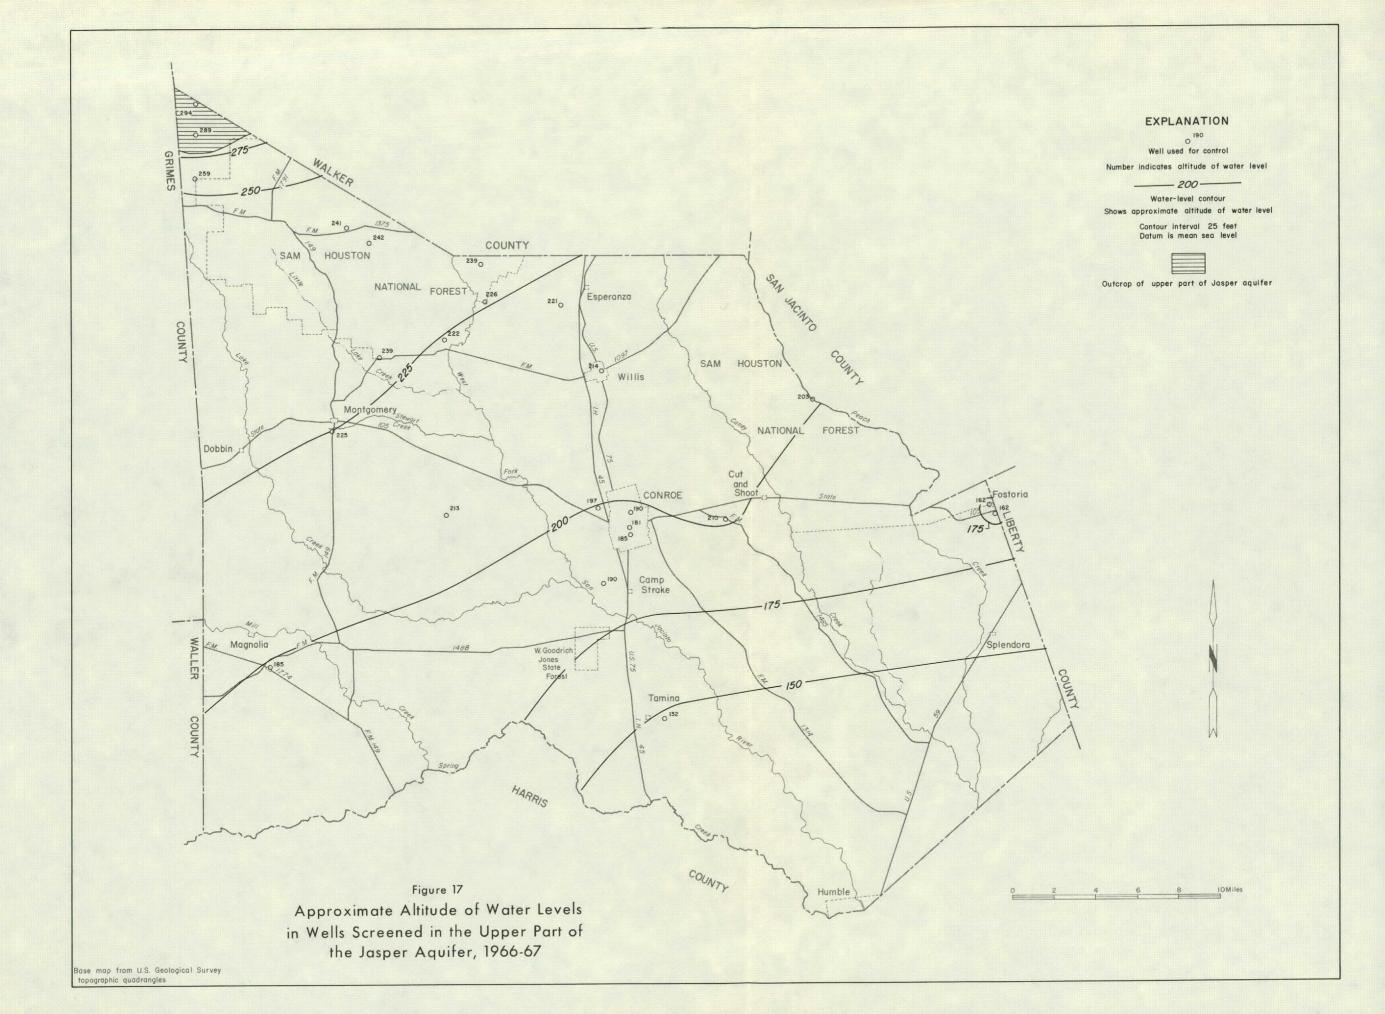
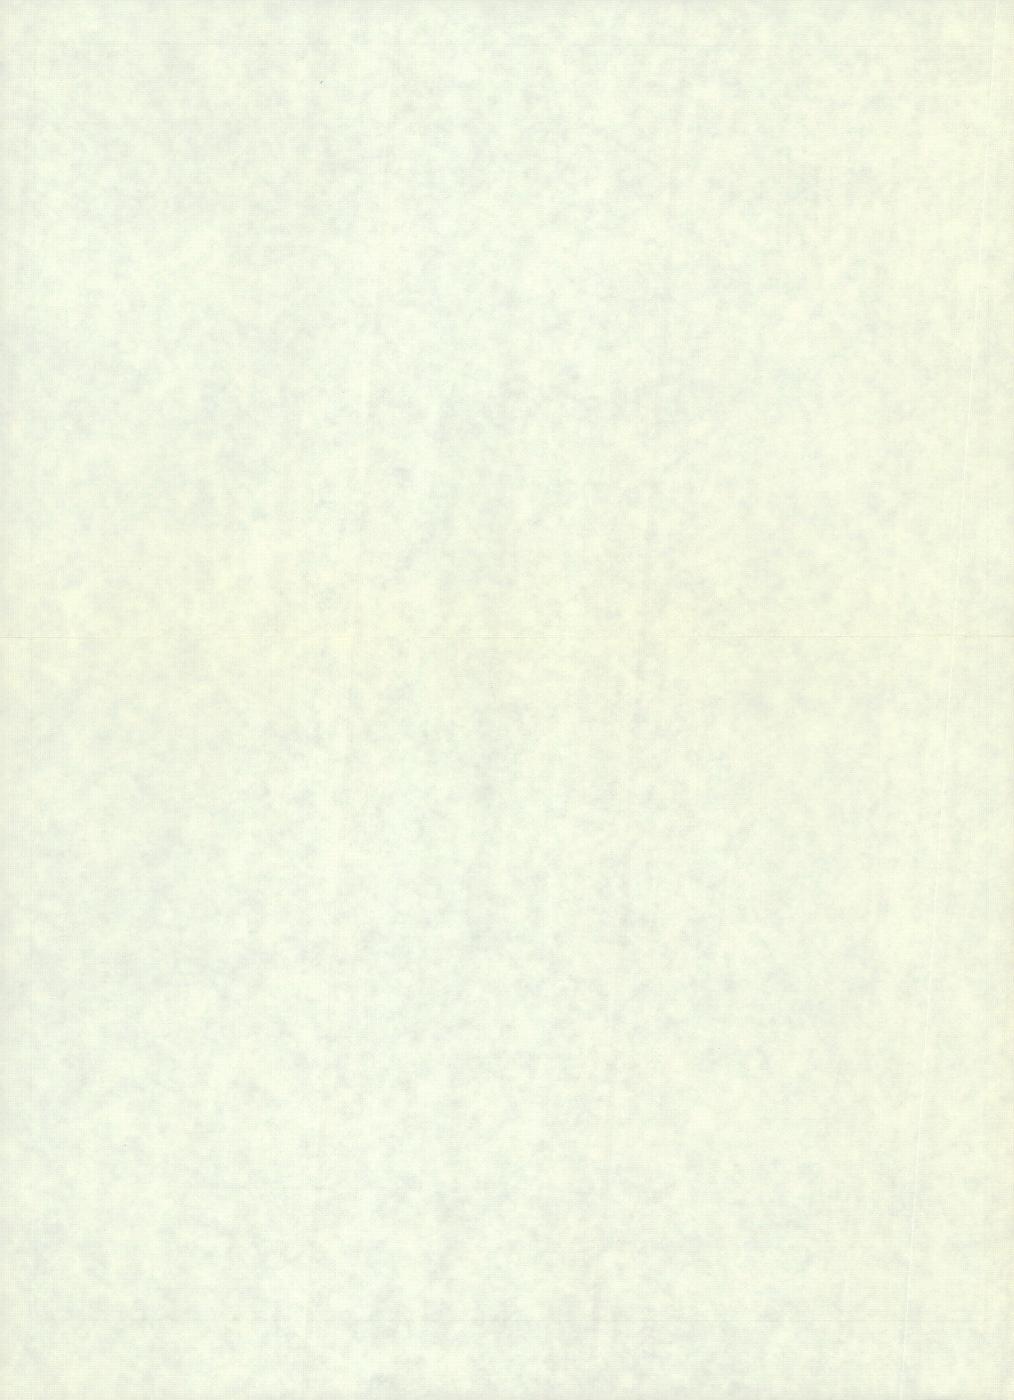
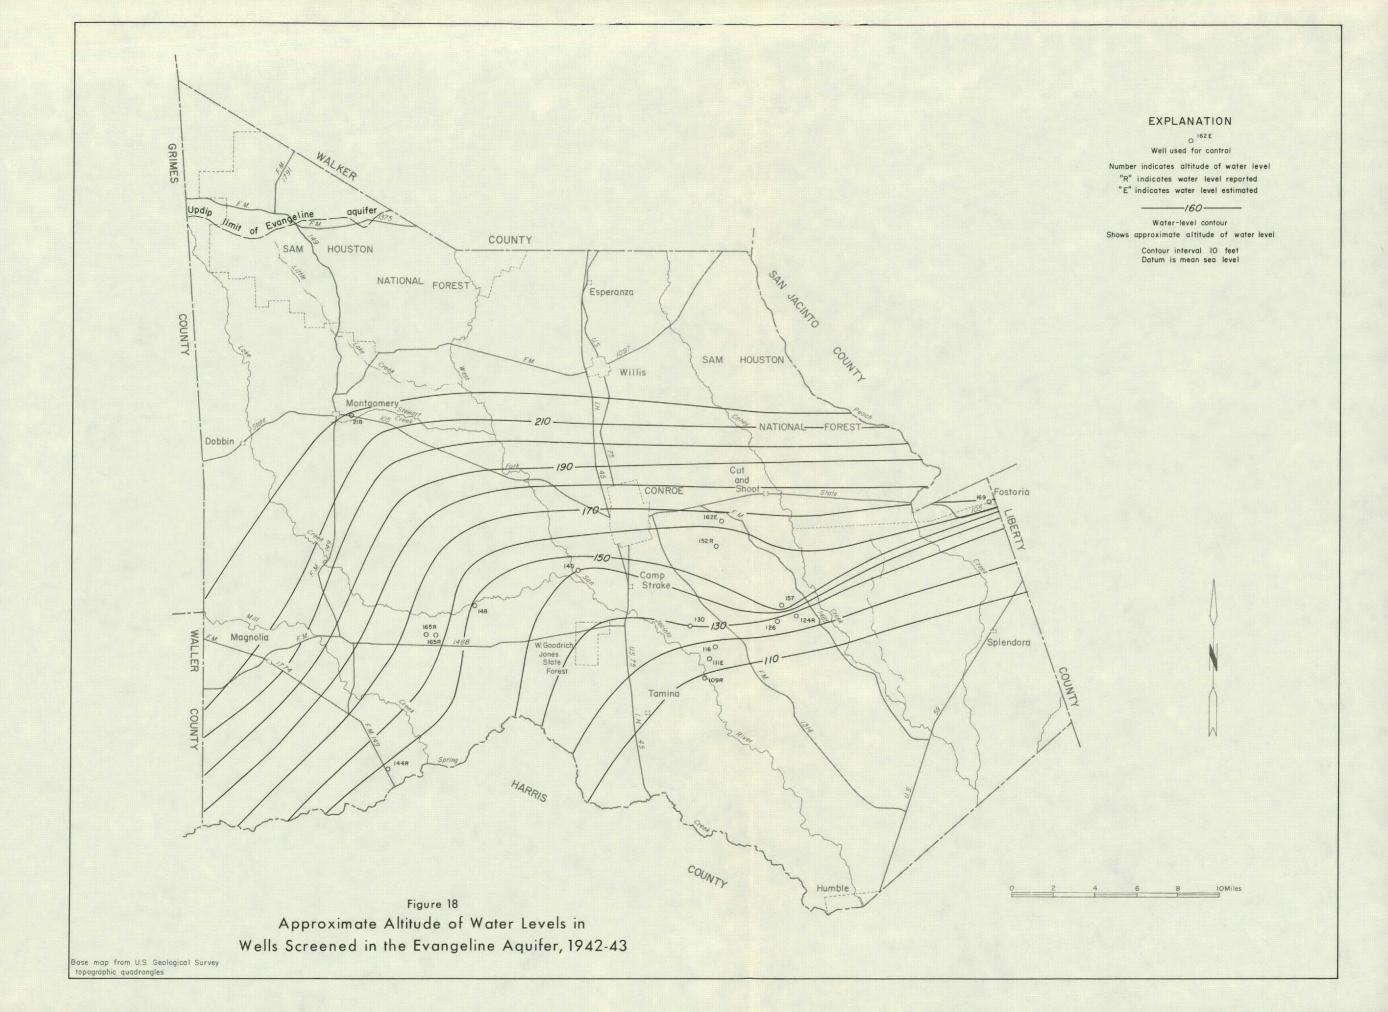



Figure 16
Water Levels in Wells Tapping the Upper Part of the Jasper Aquifer at Conroe











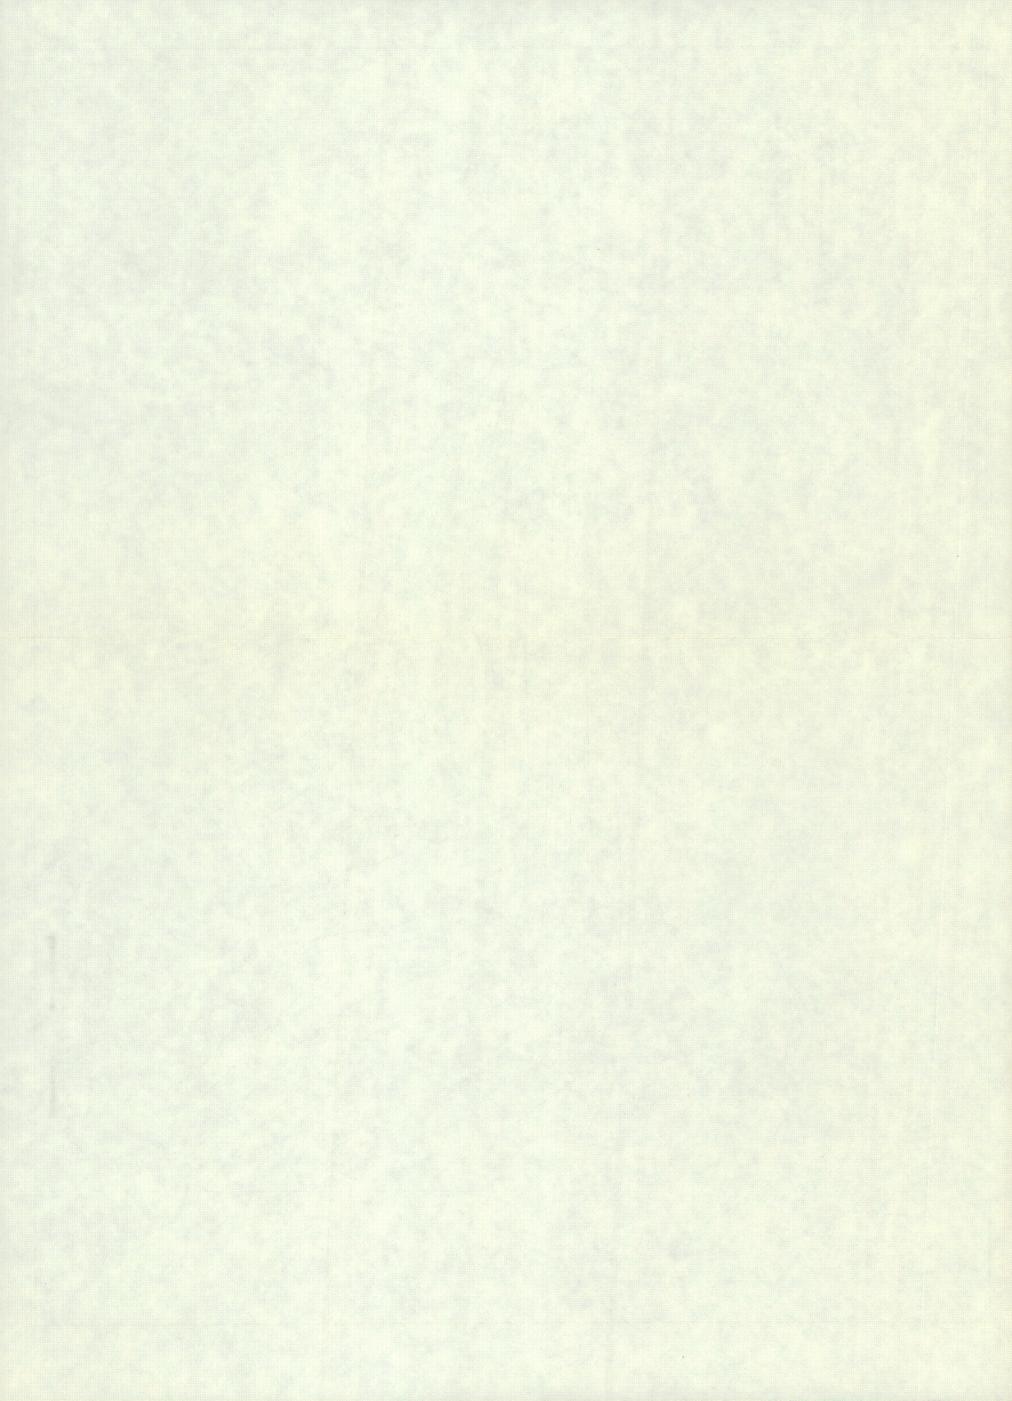

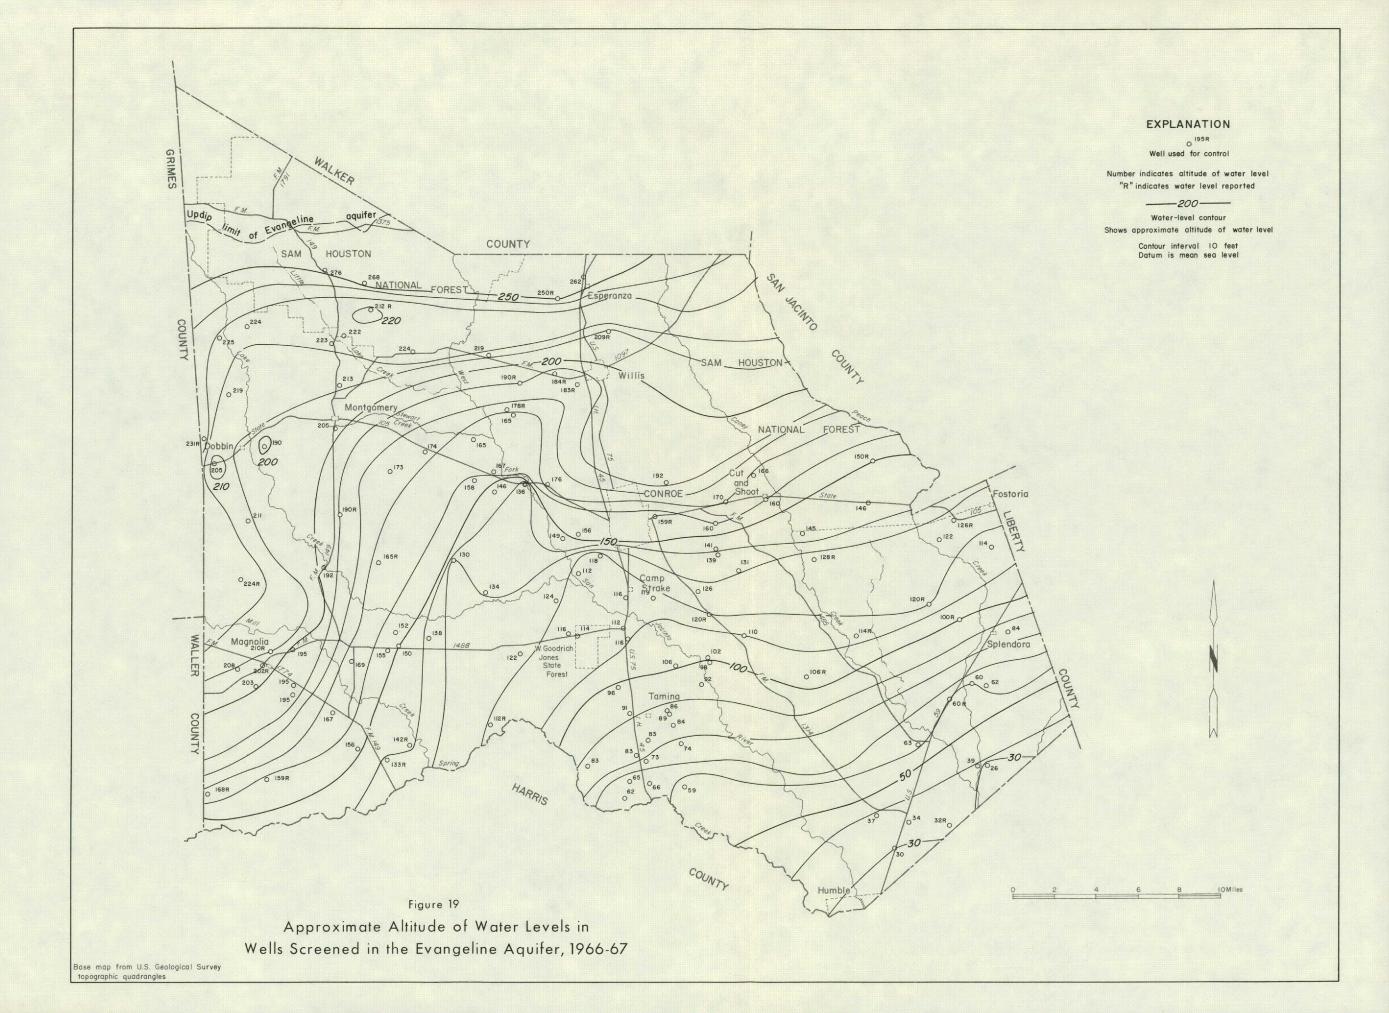

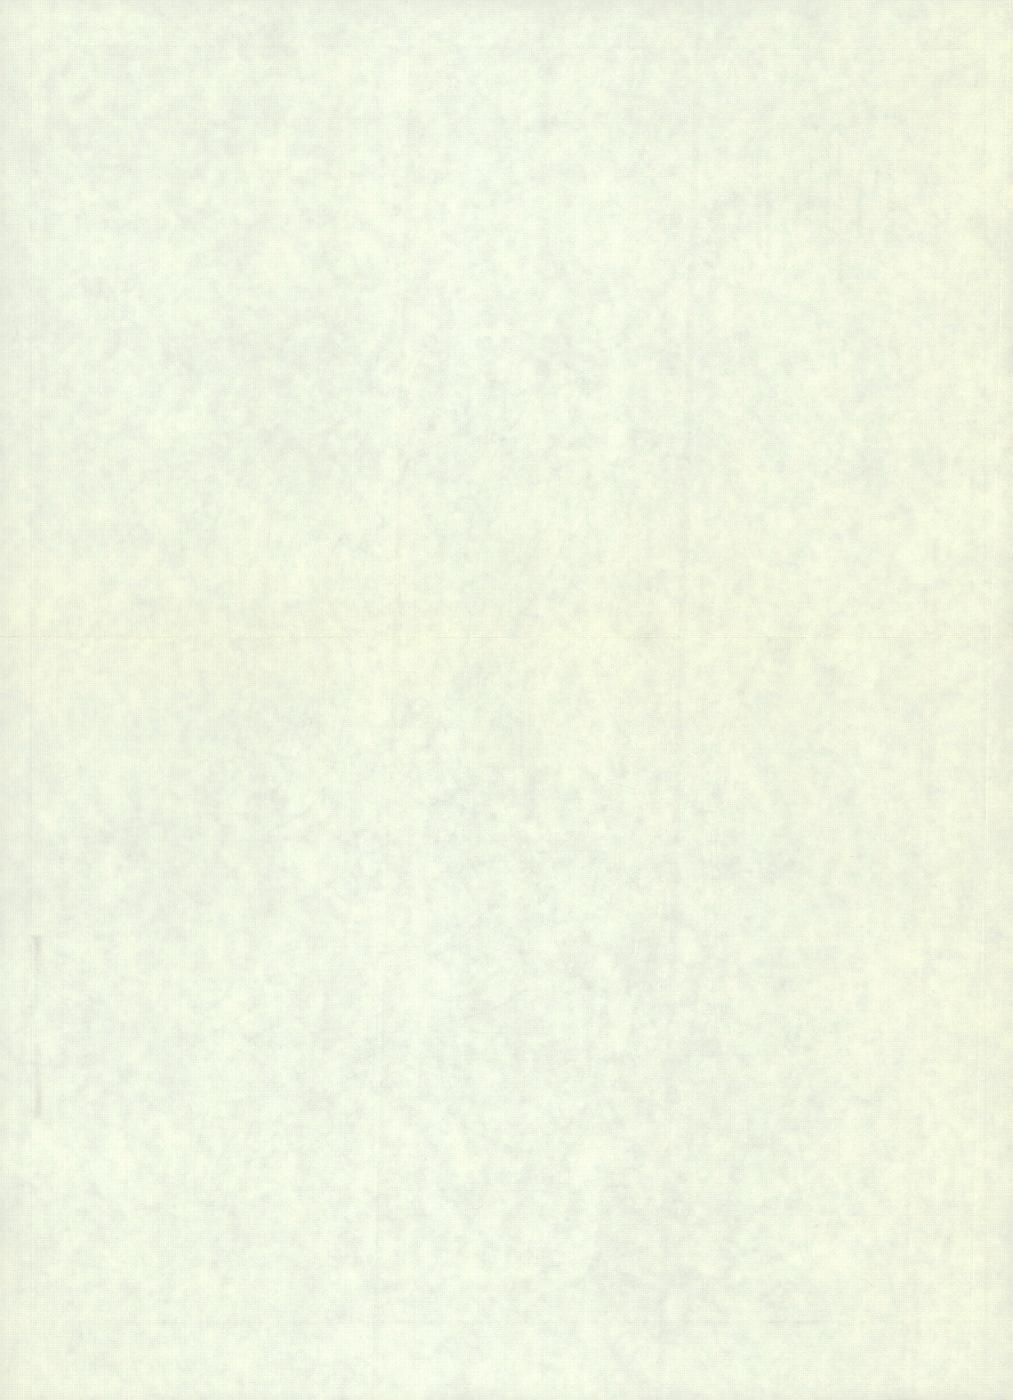


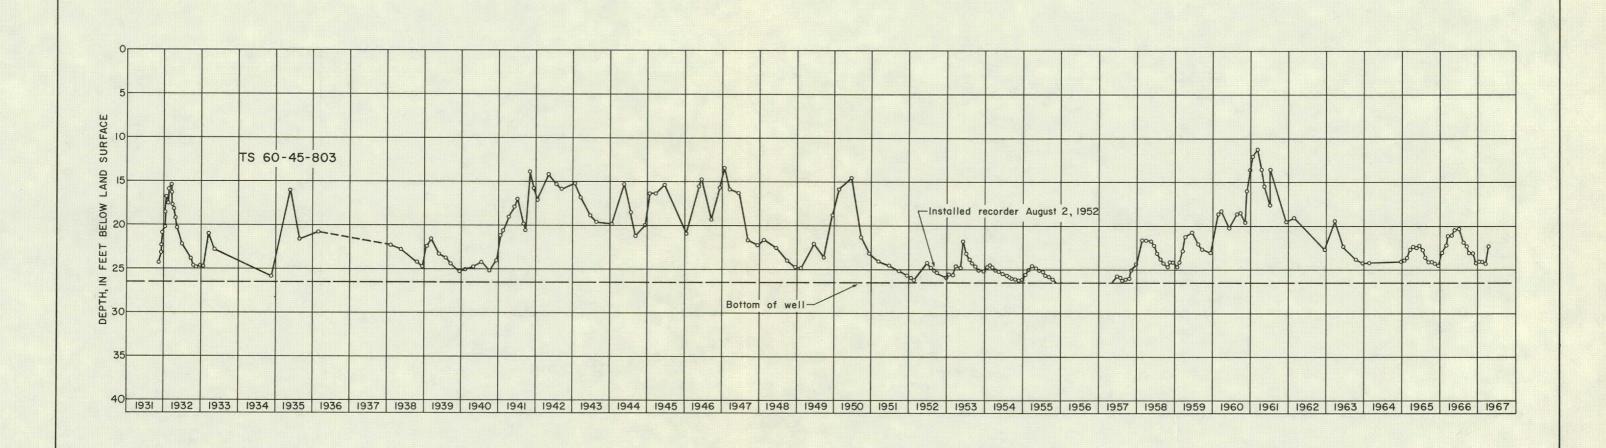


Figure 20
Selected Water Levels in a Well Tapping the Chicot Aquifer at Conroe

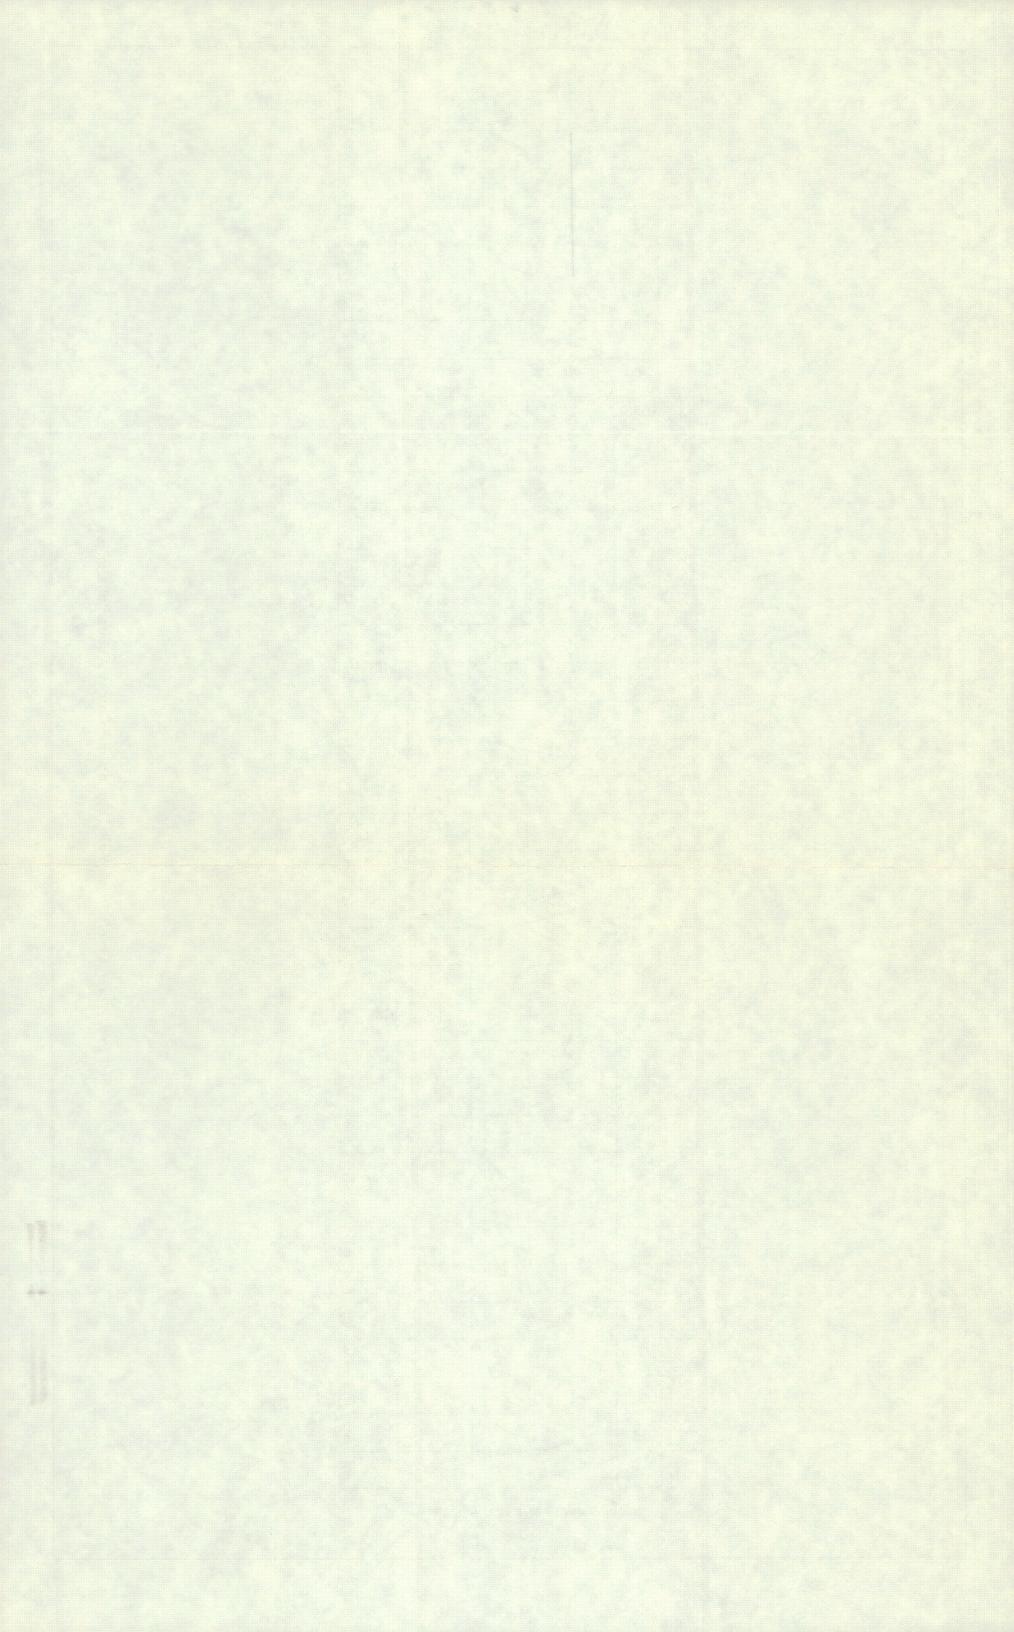

diameters of most of the sand grains but smaller than the diameters of most of the gravel particles in the gravel pack. Blank pipe of the same diameter as the screen extends above 100 feet from the top of the screen into the surface casing. Sized gravel is placed around the screen by means of a gravel tube, which is withdrawn as the annular space is filled with gravel. The gravel increases the effective diameter of the well and protects the screen from caving of the sand.

The well is developed by surging, swabbing, pumping, back-washing, by the use of chemicals, or by a combination of these processes until the specific capacity and sand-water ratio is satisfactory. Finally, the well is tested by pumping for 4 to 24 hours, during which time samples of water are collected for chemical analyses.

The size and type of pump installed depends principally upon the pumping lift and the quantity of water reeded. In general, municipal and industrial wells in Montgomery County have high-capacity, deep-well turbine pumps powered by electricity. The wells produce from 200 to 1,200 gpm (gallons per minute). Pump settings range from about 50 to 200 feet below land surface. Specific capacities range from 3 to 12 gallons per minute per foot of drawdown.

Most of the small-capacity wells that furnish water for domestic use and small industry in the county are completed with a straight wall and a single screen. The size of the screen and pipe ranges from 1-1/4 to 4 inches. In some small-capacity wells more than one size of screen or pipe may be used.

In the construction of some small-capacity municipal, industrial, and domestic wells, 4- or 6-inch casing is cemented from the surface to the top of the sand to be developed. Then a slightly smaller size screen is lowered through the pipe and set in the sand. A short section (1 to 10 feet) of blank pipe and a lead nipple are placed on top of the screen. The lead nipple is battered down to form a seal between the surface pipe and the pipe to which the screen is attached. The screen is usually stainless steel or plastic because these materials are resistant to corrosion. The openings in the screen range from 0.08 to 0.018 inch in diameter, which is smaller than the diameter of most of the sand grains.

Most small-capacity wells are equipped with small jet pumps or air compressors. Larger jet pumps, small-capacity deep well turbines, and submersible pumps are also common.

### AVAILABILITY OF GROUND WATER

The availability of water for future development from the aquifers in Montgomery County is dependent upon a number of factors. The most important are: the ability of the aquifers to transmit water; the amount of water in storage; the rate of recharge to the aquifers; the chemical quality of the water; and economic factors including the cost of wells.

The altitude of the base of fresh water ranges from 1,670 feet below sea level in the northwestern corner of the county to 3,870 feet below sea level in the central part (Figure 21).

The potential for development of the fresh-water resources of Montgomery County is greater in the areas where the total thickness of sands is greater. Figure 22 shows the thickness of sands containing fresh water below the Burkeville aquiclude (sands in the Catahoula Sandstone and in the lower and upper parts of the Jasper aquifer). The thickness of the sands ranges from 30 to 550 feet, and averages about 200 feet.

The sands of the Evangeline and Chicot aquifers (the sands above the Burkeville aquiclude) contain only fresh water. Figure 11 is a map of the base of the Evangeline aquifer showing the thickness of fresh waterbearing sands in the Evangeline and Chicot aquifers. These sands are as thick as 570 feet in the southeastern part of the county and average about 250 feet throughout the county.

The altitude of the base of slightly saline water ranges from less than 1,500 feet below sea level in the west central part of the county to 3,870 feet below sea level in the central part (Figure 23). The thickness of sand below the Burkeville aquiclude containing fresh to slightly saline water ranges from 80 to 780 feet (Figure 24).

Storage calculations were based on estimated 250-foot thickness of fresh water-bearing sands above the Burkeville aquiclude and an estimated 200-foot thickness of fresh water-bearing sands below the Burkeville. A porosity of thirty percent is assumed. The volume of fresh water stored in the aquifers underlying Montgomery County is estimated to be about 80 million acre-feet, of which 40 million acre-feet is in the Evangeline and Chicot aquifers, 30 million acre-feet is in the upper part of the Jasper aquifer, and 10 million acre-feet is below the upper part of the Jasper. Theoretically, about half of this amount of water could be drained from the aquifers assuming no recharge. By orderly development and by utilizing recharge, the quantity of ground water economically recoverable may in time greatly exceed the quantity of water now in storage.

A large quantity of water is available from artesian storage and from compaction of clays. The water from clay compaction cannot be replaced by natural processes. On the basis of studies made in the Houston area, when compaction occurs, it is estimated that 0.5 to 1.0 foot of land-surface subsidence will occur per 100 feet of water-level decline (Winslow and Doyel, 1954, p. 143), thus releasing from storage an equivalent volume of water.

The calculations of the present quantity of water moving through an aquifer are based upon the transmissibility of the aguifer, the hydraulic gradient, and width of the aguifer. Coefficients of transmissibility of 36,000 gpd per foot and 50,000 gpd per foot were assumed for the upper part of the Jasper aguifer and the Evangeline aquifer, respectively. On the basis of these assumptions, about 3.4 mgd, or 3.800 acre-feet per year, is moving through the upper part of the Jasper aguifer across a line perpendicular to the hydraulic gradient at Conroe. Approximately 9.5 mgd, or 10,600 acre-feet per year, is moving through the Evangeline aguifer across this line. These figures are based on the present hydraulic gradients of 2.7 feet per mile in the upper part of the Jasper aguifer and 5.4 feet per mile in the Evangeline aquifer.

One of the principal factors in determining the quantity of water available is the ability of an aquifer to transmit water to wells. The transmission capacity of an aquifer, as defined by Wood and others (1963, p. 98), is the quantity of water that can be transmitted through a given width of an aquifer at a given hydraulic gradient. Calculations of the potential transmission capacity of the upper part of the Jasper aquifer and the Evangeline aquifer in Montgomery County were based on these assumptions:

- 1. Water levels will be lowered to 400 feet below land surface along a line that is perpendicular to the direction of water movement and approximately parallel to the outcrop of the aquifers. This line, which would pass through Conroe, about 19 miles southeast of the outcrop, would be 36 miles long.
- 2. Recharge to the aquifer occurs only along a line, parallel to the line of discharge, that is in the middle of the outcrop area.
- Water levels in the area of the outcrop will not decline.
- 4. The hydraulic gradient is the slope of a straight line between the average altitude of the water levels at the outcrop and the altitude of the water levels at the line of discharge. After water levels are lowered to 400 feet along the line of discharge, the hydraulic gradient would be 24 feet per mile.
- 5. All sands between the line source of recharge and the line of wells will transmit water from the outcrop to the line of discharge. These sands have an average thickness of 300 feet and an average coefficient of permeability of 250 gpd per square foot. The coefficient of transmissibility is 75,000 gpd per foot.

Under these conditions, the transmission capacity of the upper part of the Jasper and the Evangeline aquifers would be 65 mgd, or 72,800 acre-feet per year.

An even greater perennial supply of fresh water can be obtained if the fresh water-bearing sands in the lower Catahoula Sandstone, and lower part of the Jasper and the Chicot aguifers are developed.

The area of the outcrop of the Evangeline and upper part of the Jasper aguifers comprises about 790 square miles in Grimes, Montgomery, and Walker Counties. About 1.7 inches of recharge per year would be required in this area to maintain a transmission capacity of 65 mgd. This quantity of required recharge is rather small compared to the quantity available in other parts of southeastern Texas. If the rejected recharge (spring flow) in the outcrop areas were salvaged, an additional 140,000 acre-feet of water per year (125 mgd) would be available. Calculations of rejected recharge are based on streamflow records for Caney Creek near Splendora from 1944 to 1967, Peach Creek at Splendora from 1944 to 1967, Spring Creek near Spring from 1939 to 1967, and West Fork San Jacinto River near Conroe from 1924 to 1927 and 1939 to 1967.

Another way to estimate the quantity of fresh ground water available for development in Montgomery County is to compare this area to areas having similar hydrologic systems in which large developments have taken place, such as the Houston district and Liberty County. Observations of the performance of the aquifers in response to large withdrawals have been made in the 5,000 square miles of the Houston district since 1929. Pumping in the Houston district is from the Chicot and Evangeline aguifers exclusively. Pumpage of ground water in the Katy and Houston areas was about 186 mgd in 1960 and 278 mgd in 1965 (Gabrysch, 1967, p. 11). Since development began, water levels have declined as much as 50 feet in the Katy area and 250 feet in the Houston area (Wood and Gabrysch, 1965, fig. 10; Gabrysch, 1967, p. 21).

In 1965, about 51 mgd was pumped in Liberty County, and about 200 mgd was estimated to be perennially available from properly spaced wells developed in the Chicot and Evangeline aquifers, without excessive water-level declines (Anders and others, 1968, p. 30 and 46). The water-bearing beds in Liberty County are considered to be less prolific than those in the Houston district. The upper part of the Jasper aquifer, which contains fresh water along the northern boundary of Liberty County, was not included in this estimate.

It was conservatively estimated that about 56 mgd could be pumped from wells developed in the Chicot and Evangeline aquifers in the southern part of Austin and Waller Counties (Wilson, 1967, p. 68).

The aquifers in Montgomery County are very similar to those in Austin, Waller, and Liberty Counties, and in the Houston and Katy areas. Montgomery County, in fact, is the recharge area for much of the

ground water withdrawn in the Houston district. With the proper spacing and development of wells, about 150 mgd of ground water could be pumped perennially from the upper part of the Jasper, Evangeline, and Chicot aquifers in Montgomery County, with only moderate water-level declines and land-surface subsidence. Additional supplies of fresh water could be obtained from sands below the upper part of the Jasper. Currently, about 6.2 mgd, or 4 percent of the available supply is being used.

A ground-water development of 150 mgd in Montgomery County probably would affect large scale ground-water development in adjoining areas, especially in the Houston district. The effect in the Houston district would be an accelerated decline in water levels and probably a reduction in the yields of wells.

Wells yielding 1,000 gpm could be developed anywhere in Montgomery County, and in many areas, wells yielding 3,000 gpm could be developed. This is confirmed in Waller and Harris Counties (Wilson, 1967, Table 5; Lang and Winslow, 1950, p. 6) by yields of wells developed in sands similar to those present in Montgomery County.

The upper part of the Jasper aquifer will probably be developed first in Montgomery County because it contains softer water which is under the highest pressure head. With increased pumping, the head in the upper part of the Jasper will be lowered, and as a result, more wells will be completed in the Evangeline aquifer. Except in areas of large withdrawals, wells completed in the Evangeline aquifer will have higher water levels than those completed in the Chicot aquifer. Eventually, the Chicot aquifer will be developed.


#### **NEED FOR FUTURE STUDIES**

The present investigation described the basic hydraulic framework of the aquifers. A continuing program of hydrologic data collection is prerequisite to

efficient development of the ground-water resources. This work should include the following:

- 1. A continuing inventory should be conducted of all new large-capacity wells, including the collection of drillers' and electrical logs and well completion data. Annual inventories of the quantities of ground water used should be made.
- 2. Periodic measurements of water levels in representative wells should be made to observe changes in the hydraulic gradients and to observe the effect of pumping. An adequate number of wells in the recharge areas should be included.
- 3. Pumping tests should be made on new largecapacity wells to more accurately determine the aquifer characteristics.
- 4. Measurements of base flow of streams should be made to determine more accurately the quantities of rejected recharge available for future use.
- 5. U.S. Coast and Geodetic Survey benchmarks should be relevelled to determine land-surface subsidence.
- 6. A study should be conducted of the relationships between acid ground water, rainfall, and forest cover; and between hard ground water and limy and clayey soils as a method of delineating areas of corrosive ground water.

The continuing program of basic-data collection must extend into adjoining counties because the effects of the development in nearby areas will affect the ground-water supplies in Montgomery County. The area of observation should include, in addition to Montgomery County, at least half of Walker County and parts of the other adjoining counties.

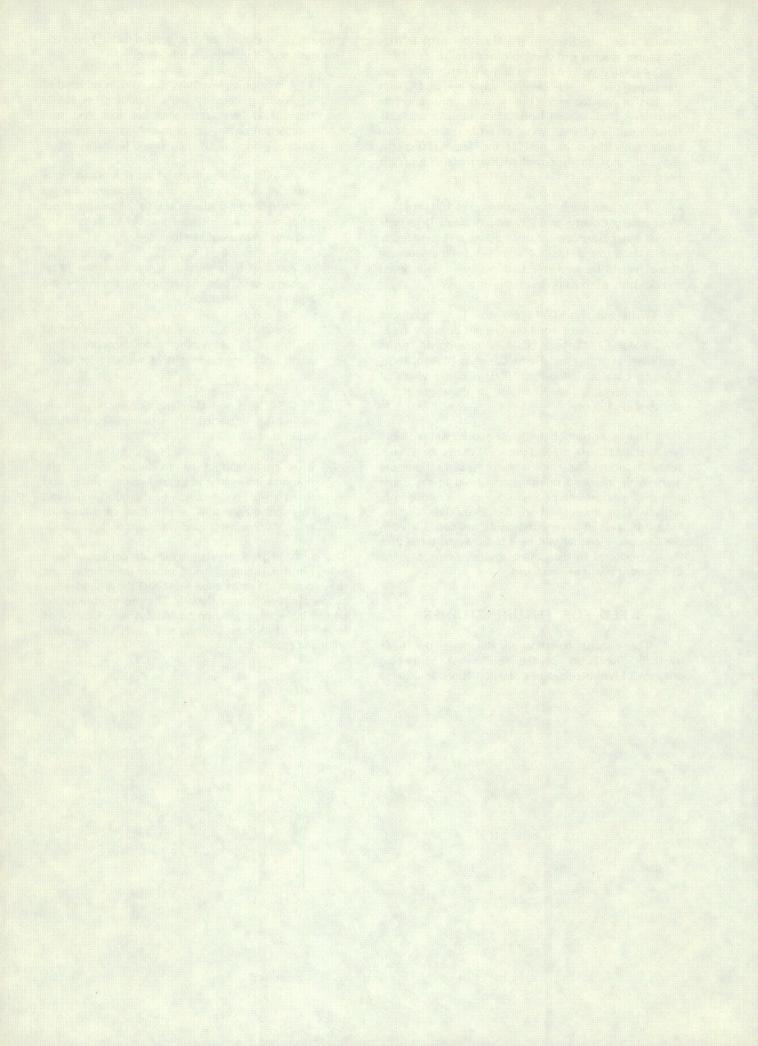

## REFERENCES CITED

- Anders, R. B., McAdoo, G. D., and Alexander, W. H., Jr., 1968, Ground-water resources of Liberty County, Texas: Texas Water Devel. Board Rept. 72, 140 p.
- Bernard, H. A., and LeBlanc, R. J., 1965a, Résumé of the Quaternary geology of the northwest Gulf of Mexico, *in* the Quaternary of the United States: New Jersey, Princeton Univ. Press, p. 137-185.
- \_\_\_\_\_1965b, Résumé of Quaternary geology of the northwestern Gulf of Mexico province: Shell Devel. Co., EPR Pub. 400.
- Bernard, H. A., LeBlanc, R. J., and Major, C. F., 1962, Recent and Pleistocene geology of southeast Texas, *in* Geology of the Gulf Coast and central Texas and guidebook of excursions: Houston Geol. Soc., Ann. Meeting Geol. Soc. of America and associated societies, Houston, Texas., p. 175-224.
- Bureau of Economic Geology, 1968, Geologic atlas of Texas, Beaumont sheet: Univ. Texas, Bur. Econ. Geology map.
- Collins, W. D., 1926, Relations between quality of water and industrial development in the United States: U.S. Geol. Survey Water-Supply Paper 559, 43 p.
- Conklin, H. L., 1956, Water requirements of the carbon-black industry: U.S. Geol. Survey Water-Supply Paper 1330-B, p. 73-101.
- Cooper, H. H., Jr., and Jacob, C. E., 1946, A generalized graphical method for evaluating formation constants and summarizing well-field history: Am. Geophys. Union Trans., v. 27, p. 526-534.
- Darton, N. H., Stephenson, L. W., and Gardner, Julia, 1937, Geologic map of Texas: U.S. Geol. Survey geol. map.
- Deussen, Alexander, 1914, Geology and underground waters of the southeastern part of the Texas Coastal Plain: U.S. Geol. Survey Water-Supply Paper 335, 365 p.
- Doering, John, 1935, Post-Fleming surface formations of southwest Texas and south Louisiana: Am. Assoc. Petroleum Geologists Bull., v. 19, no. 5, p.651-688.
- Fenneman, N. M., 1938, Physiography of eastern United States: New York, McGraw-Hill Book Co., Inc., 714 p.
- Ferris, J. G., Knowles, D. B., Brown, R. H., and Stallman, R. W., 1962, Theory of aquifer tests: U.S. Geol. Survey Water-Supply Paper 1536-E, 173 p.

- Fisk, H. N., 1940, Geology of Avoyelles and Rapides Parishes: Louisiana Dept. Conserv. Bull. 18, 240 p., 50 figs.
- Gabrysch, R. K., 1967, Development of ground water in the Houston district, Texas, 1961-65: Texas Water Devel. Board Rept. 63, 35 p.
- Gillett, P. T., and Janca, I. G., 1965, Inventory of Texas irrigation, 1958 and 1964: Texas Water Comm. Bull. 6515, 317 p.
- Hackett, O. M., 1962, Ground-water levels in the United States, 1956-59, south-central states: U.S. Geol. Survey Water-Supply Paper 1549, 192 p.
- Hem, J. D., 1959, Study and interpretation of the chemical characteristics of natural water: U.S. Geol. Survey Water-Supply Paper 1473, 269 p.
- Jones, P. H., 1952, Electric-logging methods, principles of interpretation, and applications in ground-water studies: U.S. Geol. Survey open-file rept., 34 p.
- Kane, J. W., 1967, Monthly reservoir evaporation rates for Texas, 1940 through 1965: Texas Water Devel. Board Rept. 64, 111 p.
- Lang, J. W., and Winslow, A. G., 1950, Geology and ground-water resources of the Houston district, Texas: Texas Board Water Engineers Bull. 5001, 55 p.
- Livingston, Penn, 1939, Records of wells, drillers' logs, water analyses, and map showing location of wells in Montgomery County, Texas: Texas Board Water Engineers duplicated rept., 13 p.
- Maier, F. J., 1950, Fluoridation of public water supplies: Am. Water Works Assoc. Jour., v. 42, pt. 1, p. 1120-1132.
- Metcalf, R. J., 1940, Deposition of Lissie and Beaumont Formations of the Gulf Coast of Texas: Am. Assoc. Petroleum Geologists Bull., v. 24, no. 4, p. 693-700.
- Michaux, F. W., Jr., and Buck, E. O., 1936, Conroe Oil Field, Montgomery County, Texas, Am. Assoc. Petroleum Geologists Bull., vol. 20, no. 6, p. 736-779.
- Moore, E. W., 1940, Progress report on the committee on quality tolerances of water for industrial uses:

  New England Water Works Assoc.

  Jour., v. 54, p. 261-272.
- Mussey, O. D., 1955, Water requirements of the pulp and paper industry: U.S. Geol. Survey Water-Supply Paper 1330-A, p. 1-71.

- Mussey, O. D., 1957, Water requirements of the rayon and acetate fiber industry: U.S. Geol. Survey Water-Supply Paper 1330-D, p. 141-179.
- Rayner, F. A., 1959, Records of water-level measurements in Chambers, Liberty, and Montgomery Counties, Texas, 1931 through April 1958: Texas Board Water Engineers Bull. 5901, 33 p.
- Rose, N. A., 1943, Records of wells, drillers' logs, water analyses, and map showing locations of wells in Montgomery County, Texas: Texas Board Water Engineers duplicated rept., 30 p.
- Sandeen, W. M., 1968, Ground-water resources of San Jacinto County, Texas: Texas Water Devel. Board Rept. 80, 89 p.
- Sayre, A. N., 1957, Water levels and artesian pressures in observation wells in the United States, 1955, Pt. 4, South-central states: U.S. Geol. Survey Water-Supply Paper 1407, 216 p.
- Sellards, E. H., Adkins, W. S., and Plummer, F. B., 1932, The geology of Texas, v. 1, Stratigraphy: Univ. Texas Bull. 3232, 1007 p.
- Swenson, H. A., and Baldwin, H. L., 1965, A primer on water quality: Washington, U.S. Govt. Printing Office, 27 p.
- Taylor, T. U., 1907, Underground waters of the Coastal Plain of Texas: U.S. Geol. Survey Water-Supply Paper 190, 73 p.
- Texas Water Commission and Texas Water Pollution Control Board, 1963, A statistical analysis of data on oil field brine production and disposal in Texas for the year 1961 from an inventory conducted by the Texas Railroad Commission: Summary vol., 81 p.
- U.S. Public Health Service, 1962, Public Health Service drinking water standards: Public Health Service Pub. 956, 61 p.
- U.S. Salinity Laboratory Staff, 1954, Diagnosis and improvement of saline and alkali soils: U.S. Dept. Agr. Handbook 60, 160 p.
- Weeks, A. W., 1945, Oakville, Cuero, and Goliad Formations of Texas Coastal Plain between Brazos River and Rio Grande: Am. Assoc. Petroleum Geologists Bull., v. 29, no. 12, p. 1721-1732.

- Wenzel, L. K., 1942, Methods for determining permeability of water-bearing materials, with special reference to discharging-well methods: U.S. Geol. Survey Water-Supply Paper 887, 192 p.
- Wilcox, L. V., 1955, Classification and use of irrigation waters: U.S. Dept. Agr. Circ. 969, 19 p.
- Wilcox, L. V., Blair, G. Y., and Bower, C. A., 1954, Effect of bicarbonate on suitability of water for irrigation: Soil Sci., v. 77, no. 4, p. 259-266.
- Wilson, C. A., 1967, Ground-water resources of Austin and Waller Counties, Texas: Texas Water Devel. Board Rept. 68, 231 p.
- Winslow, A. G., 1950, Geology and ground-water resources of Walker County, Texas: Texas Board Water Engineers Bull. 5003, 48 p.
- Winslow, A. G., and Doyel, W. W., 1954, Land-surface subsidence and its relation to the withdrawal of ground water in the Houston-Galveston region, Texas: Economic Geol., v. 49, no. 4, p. 413-422.
- Winslow, A. G., and Kister, L. R., 1956, Saline-water resources of Texas: U.S. Geol. Survey Water-Supply Paper 1365, 105 p.
- Winslow, A. G., and Wood, L. A., 1959, Relation of land subsidence to ground-water withdrawals in the upper Gulf Coast Region, Texas: Mining Eng., Am. Inst. of Mining Eng., Ann. Meeting, 13 p.
- Wood, L. A., 1956, Availability of ground-water in the Gulf Coast Region of Texas: U.S. Geol. Survey open-file rept., 55 p.
- Wood, L. A., and Gabrysch, R. K., 1965, Analog model study of ground water in the Houston district, Texas: Texas Water Comm. Bull. 6508, 103 p.
- Wood, L. A., Gabrysch, R. K., and Marvin, Richard, 1963, Reconnaissance investigation of the ground-water resources of the Gulf Coast Region, Texas: Texas Water Comm. Bull. 6305, 123 p.

#### Table 7.--Records of Wells in Montgomery and Adjacent Counties

Water level : Reported water levels are given in feet; measured water levels are given in feet and tenths.

Method of lift and type of power: A, airlift; B, bucket; J, jet; N, none; P, piston; S, submergible; T, turbine; E, electric; H, hand; G, natural gas; W, wind. Number indicates horsepower. "Flows" indicates that no lift is needed although

Use of water

some flowing wells are assisted by pumps.

D, domestic; Ind, industrial; Irr, irrigation; P, public supply; S, livestock; U, unused.

B, Burkeville aquiclude; C, Chicot aquifer; Ev, Evangeline aquifer; JU, upper part of the Jasper aquifer. Water-bearing unit

					CASING			TIAMED T	INT INT			1	T The state of the
			DATE	DEPTH		WATER-	ALTITUDE	WATER L ABOVE (+) OR		77			
	WELL	OWNER	COM- PLET-	OF WELL	DIAM- ETER	BEAR -	OF LAND SURFACE	BELOW LAND SURFACE DATUM		TE OF SUREMENT	METHOD OF	USE	REMARKS
			ED	(FT)	(IN)	UNITS	(FT)	(FT)	PHAC	OKEHENI	LIFT	WATER	KEPARAS
					Mor	ntgomery	County						
TS	-60-26-202	J.K. Holke, Sr.	1927	28	36	JU	355	27.0	Jan.	6, 1967	J,E, 1/3	D	
	203			300	4	JU	395	106.0		do	S,E, 3/4	D	
	204	1		75	12	JU	364	70.0		do	J,E	D	
	501	R.E. Robinson	1953	220	4	JU	343	83.6	38	do	S,E	D	Screened from 200-220 ft. Iron problem developed after about 5 years.
	601	Kidd Sims		31	6	В	322	28.5		do	В,Н	D	
	801	Robinson Oil Co.	1957	5,349	17		335			22 (1)			Oil test. 2
	27-801	B.C. Stell	1965	226	4	JU	265	24.1	Nov.	14, 1966	S,E, 1	D	Screened from 216-226 ft.
*	802	U.S. Forest Service	1963	180	4	JU	230	+ 12.5	Jan.	18, 1967	Flows	Ind	8 gpm yield, 10 ft drawdown. Well converted from oil test. Has iron and sulfur taste. Temp. 72°F.
	28-801	do	1964	188	4	JU	230	+ 9.0		do	Flows	Ind	24 gpm, 6 ft drawdown. Originally oil test. Temp. 74°F. Specific capacity 4.00 gpm, 5 min. recovery.
*†	901	Felix Billnoske	1962	109	4	Ev	333	100	June	1966	J,E, 1	D	Screened from 97-109 ft. Iron problem.
	902	do		50	36	Ev	333	14.7	July	27, 1966	N	U	
†	29-701	Lige Bilnoski	1880	34	36	Ev	300	24.1 22.5	Aug. June	7, 1942 27, 1966	J,E, 1/2	D	Reported too hard for cooking. Bad taste (Methane-nitrate). Hand and bucket lift prior to 1954.
t	801	R.E. Haigler	1964	261	4	Ev	332	36.3	June	28, 1966	S,E, 3/4	υ	Screened from 251-261 ft. Aban-doned.
	802	Mrs. Merrill	1965	183	2	Ev	298	53	Aug.	1965	J,E, 3/4	D	Reported yield of 20 gpm. Screened from 173-183 ft. 1/2
	901	Margret E. Smith		50	24	С	380	29.8	June	27, 1966	N	U	
t	903	Eugene Molk	1950	350	3	Ev	370	126	Oct.	1953 1956	J,E, 1	D,S	Screened from 300-350 ft (collapsed and replaced in 1960).

Table 7.--Records of Wells in Montgomery and Adjacent Counties--Continued

			I	CASING			WATER L	EVEL				
WELL	OWNER	DATE COM- PLET- ED	DEPTH OF WELL (FT)	DIAM- ETER (IN)	WATER- BEAR- ING UNITS	ALTITUDE OF LAND SURFACE (FT)	ABOVE (+) OR BELOW LAND SURFACE DATUM (FT)	DATE MEASURE		METHOD OF LIFT	USE OF WATER	REMARKS
TS-60-34-501	J.L. Darnaby	1966	100	4	Ev	255	30.4	Jan. 6	, 1967	S,E, 1	D	Screened from 80-100 ft.
* 502	Texas Forest Product Co.	1956	225	4	В	252	27 est.	do		A,E	Ind	8 5/8-in. slotted pipe at 109-129 ft and 185-220 ft. 1/2/
601			30	36	Ev	261	10.2	Jan. 4	, 1967	J,E	U	Abandoned.
* 602	Journey and Dabney	1934	400	3	JU	223	4		1934	N	U	Jan. 6, 1967, found destroyed. Screened from 390-400 ft.
603	W.A. Moon	1945	180	4	Ev	261	37.0	Jan. 4	, 1967	S,E, 1/2	ם	
604	R.E. Webb	1956	89	4	Ev	320	43	June	1956	J,E, 3/4	D	Casing: 4-in. at 0-75 ft, 2-in. at 71-79 ft, 2-in. slotted steel at 79-89 ft. 1/2
901	Leslie Cahoon	1956	500	4	JU	223	+ 5		1966	Flows	D	Flows about 2 gpm; Temp. 75°F. Screened from 490-500 ft.
902	Mr. Gosnick		70	36	Ev	267	47.6	Jan. 4	, 1967	J,E, 3/4	D	
903	Mr. Gray	1966	73	2	Ev	258	32	Mar.	1966	J,E, 1/2	D	2-inch plastic screen from 63-73 ft. Yield 7 1/2 gpm. 1/
35-201	Flower Follett		60	42	Ev	328	56.0 Dry	Nov. 28 Dec. 12		N	U	Found destroyed on Jan. 12, 1957.
202	do		107	3	Ev	327	58.3 51.1	Nov. 28 Feb. 15		N	U	3/
203	Red Bank Oil Co.	1936	4,006			334						0il test. 2/
204	Bill Havner	1965	130	2	Ev	250	30		1965	J,E, 1	D	2-in. slotted steel at 110-130 ft
205	Hidden Hills Subdivision		35	36	Ev	282	14.5	Nov. 14	, 1966	В,Н	D	
302	J.A. Bond	1964	132	3	Ev	250	38	Aug.	1964	J,E, 1	D	3-in., 10-gauge slotted steel at 106-112 ft. Reported yield 3 gpm.
501	John Bailey	1900	43	7-	Ev	262	39.0	Nov. 14	, 1966	В,Н	D	
502	Flamingo Lakes	1960	280	6	Ev	258	36.1	do	)	S,E	P	Screened from 260-280 ft.
601	Keith and Mary Williams	1965	220	4	Ev	286	62.3	Nov. 3	, 1966	S,E	D	Screened from 210-220 ft.
602	Cammile Bermann	1963	443	4	Ju	260	21.0	do	0	S,E, 1 1/2	D	4-in. slotted steel at 428-443 ft Reported water level 27 ft in 1963.
701	James E. Price	1948	725	4	JU	321	99		1948	J,E, 2	D	
702	Giles Brothers Lumber Co.	1962	216	4	Ev	332	113	Aug.	1962	S,E, 3/4	Ind	Screened from 210-216 ft.

Table 7.--Records of Wells in Montgomery and Adjacent Counties--Continued

Г											705													$\neg$
	REVARKS	Abandoned 1959, Reported yield 23 gpm. Screened from 234-254 ft.	Reported yield 100 gpm; 4-in. slotted steel screen from 545- 575 ft. $\underline{y}$		Destroyed.	Destroyed.	Destroyed.	Screened from 400-420 ft.	4-in. screen from 561-581 ft.	Destroyed.	Screened from 574-606 ft.		Reported yield 100 gpm.	Reported yield 50 gpm, 2 1/2-in, slotted steel at 431-469 ft, $\underline{1}$	Screened from 454-465 ft.		Oil test. 2	Originally drilled to 4,300 ft, plugged to 2,500 ft, screened from 2,000 ft to bottom. Reported yield 100 gpm, probably large contribution from 300-500 ft. J	Destroyed in 1922.	0il test. 2/	Screened from 441-462 ft; producing sands 402-464 ft.		4-in. screen from 270-293 ft. Well supplies dairy.	
	USE OF WATER	Ω	D4	D	n	n	n	Ъ	ы	n	Q	D	s	д	D	Q	;	S	n	:	Q	D	Q	
	METHOD OF LIFT	T,E, 2	T,E	В,Н	Z	Z	N	S,E	S,E,15	Z	T,E, 2	в,н	Flows	S,E, 5	J,E	J,E	1	Flows	1	:	S,E, 1 1/2	J,E	S,E, 3	
ZET.	DATE OF MEASUREMENT	Mar. 1955	June 1959	Nov. 14, 1966	June 23, 1942	Sept. 1935	June 3, 1942	Oct. 31, 1966	July 1966	Sept. 1935	1939	Oct. 31, 1966	Feb. 28, 1967	op	June 27, 1966	1966	:	1924	1922	1	Nov. 3, 1966	op	op	
WATER LEVEL	ABOVE (+) OR BELOW LAND SURFACE DATUM (FT)	06	85	64.8	92.1	89	9.94	98.2	85	83	71	47.4	+ 55 F	9.5	31.3	40	;	+ 55	+	1	+ 19.3 N	13.5	26.8	
	ALTITUDE OF LAND SURFACE (FT)	311	311	278	290	306	265	303	310	300	300	311	172	235	252	290	290	166	191	191	203	196	246	
l	WATER- BEAR- ING UNITS	Ev	DE C	Ev	Ev	R	Ev	Ev	DC	Ev	J.C	Ev	JU	21	Ju	Ev	;	JU, Ev	5	+	R	Ev	Ev	
CASTNG	DIAM- ETER (IN)	4	7	1	9	4	4	4	9	4	4	36	14	4	3	2	:	4	14	1	5	24	S	
	DEPTH OF WELL (FT)	254	290	75	230	999	180	420	586	110	909	120	400	473	465	80	5,339	2,500	4,300	7,220	462	15	320	1
	DATE COM- PLET- ED	1948	1959	1949	1940	1935	1939	1959	1966	1935	1939	1	1938	1965	1940	1940	1959	1924	1922	1940	1962	1934	1942	
	OWNER	R.T. Weisinger	City of Montgomery	Rock Jones	H.F. Mickler	Montgomery County School Dist.	A.L. Hamilton	Montgomery County School Dist.	R.T. Weisinger	W.B. Gray	High Point (pre. H.W. Fling)	High Point	Foster Estate	Bonanza Corp.	Frank Smith, Jr.	Mrs. Novak	G.W. "Chick" Hanslip	Luther E. Hall	ф	Strum and Womack	C.B. Shaver	J.R. Teel	J.B. Kleimann	
	WELL	TS-60-35-801	802	803	804	802	908	807	808	808	106	903	36-101	201	+ 302	303	304	401	402	403	404	405	505	
L					*	*	*		*						*	+					*	+-		

See footnotes at end of table.

Table 7. -- Records of Wells in Montgomery and Adjacent Counties -- Continued

				CASING			WATER I	LEVEL			
WELL	OWNER	DATE COM- PLET- ED	DEPTH OF WELL (FT)	DIAM- ETER (IN)	WATER - BEAR - ING UNITS	ALTITUDE OF LAND SURFACE (FT)	ABOVE (+) OR BELOW LAND SURFACE DATUM (FT)	DATE OF MEASUREMENT	METHOD OF LIFT	USE OF WATER	REMARKS
TS-60-36-601	Hulan Lakes Subdivision	1965	278	4	Ev	312	128	1965	S,E, 3	P	Reported yield 26 gpm. Screened from 212-232 ft and 268-278 ft. 1
701	Dan H. Madeley	1926	100	4	Ev	166	+ 5	Nov. 1966	Flows	s	Reported yield 30 gpm.
702	do	1926	80	12	Ev	166	+ 5	do	Flows	S	Drilled as oil test. Turned 100- acre area into marsh. Reported yield 100 gpm.
703	B.D. Tucker	1966	243	3	Ev	201	37	July 1966	J,E, 3/4	D	Screened from 238 to 243 ft.
704	Dan H. Madeley	1960	300	4	Ev	245	70	Nov. 1966	J,E	D	Screened from 280-300 ft.
802	E.D. Singletery	1955	235	4	Ev	265	75	do	S,E	D	Screened from 215-235 ft.
803	Carl Capps	1966	225	4	Ev	218	40	Oct. 1966	J,E	D	Screen (2 1/2-in. slotted steel) from 215-225 ft.
804	do	1955	55	4	Ev	165	+ 5 est.	Nov. 1966	Flows	D	Estimated yield 2 gpm. Iron problem.
805	do	1932	55	4	Ev	168	+ 5	do	Flows	D	Do.
806	Jack Hall	1958	280	4	Ev	221	56.1	Nov. 4, 1966	J,E, 1	D	Screened from 260-280 ft.
807			12	36	Ev	172	10.5	do	N	U	Concrete casing.
902		1	20	36	С	308	16.1	do	в,н	D	Concrete casing.
903	M.J. Ross Ranch	1960	283	4	Ev	243	80	1960	J,E	D	Screened from 273-283 ft.
904	Sun Ray Midcontinent Oil and Atascosa Drilling Co.	1961	4,831			338		200 T			Oil test. 2/
*† 37 <b>-</b> 102	Walter Inglet	1939	54	36	С	315	44.2 46.5	Sept. 24, 1942 June 27, 1966	J,E, 3/4	D	Used to supply saw mill.
103	Ray F. Weston	1965	253	2	Ev	340	116	Jan. 1965	J,E, 1 1/2	D	Perforated slotted steel from 243-253 ft. Reported yield 10 gpm. <u>J</u>
* 105	Robert Hardy, Jr.	1965	154	4	Ev	342	79.7	Sept. 9, 1966	S,E, 3/4	Ind	Reported yield 6 gpm. Screened from 144-155 ft. 1/
201	Albert Towel		32	36	Ev	278	10.9	June 28, 1966	J,E	D	Concrete casing.
202	S. Noviski	1965	207	2	Ev	290	63	Aug. 1965	J,E, 1	D	Reported yield 4 gpm. Screened from 197-207 ft. 1/
301	Lee O. Koen, well 3	1937	60	6	C	365	10.6	June 28, 1966	P,W	U	
* 302	Lee O. Koen, well 2	1937	60	3	С	320	9.4	Sept. 24, 1942	N	U	
303	Lee O. Koen, well 1	1937	50	6	Ev	375	9.7 12.4	Sept. 24, 1942 June 28, 1966	N	U	

Table 7. -- Records of Wells in Montgomery and Adjacent Counties -- Continued

	REMARKS	Screened from 342-362 ft. $\underline{\mathbb{I}}$	Screened from 452-473 ft. Drill- ers' log from 221-473 ft.	Well filled with sand.	Slight iron reported occasion- ally. Rusty distribution system.	Reported yield 105 gpm. Reported drawdown 85 ft. Screened from 282-298 ft and 320-362 ft. $\underline{1}$	Screened from 830-855 ft, 860-875 ft, and 889-900 ft. 2]	Screened from 805-830 ft, 840-850 ft, and 860-880 ft. Estimated yield 305 gpm. Reported drawdown 68 ft. $\underline{y}$		Reported yield 20 gpm. Screened from 336-342 ft and 345-355 ft. $\underline{J}$	Reported yield 7 gpm. Screened from 119-129 ft. $\underline{1}\underline{J}$	Sanded in 1960.	Steel casing. Reported soft water.	Supplied oil test. Destroyed.	Plastic casing. Good quantity; supplies 2 houses.		Concrete casing.	Reported yield 18 gpm. Screened from 270-280 ft. $\underline{1}\underline{1}$	Steel casing.	Screened from 876-916 ft. Reported yield 150 gpm after 6-hour pumping period; drawdown 23 ft. 1/2
	USE OF WATER	d	Q	D	Q	D	ы	D.	n	Q	Q	n	Д	n	Q	n	D	Q	д	д
	METHOD OF LIFT	S,E	A,E, 3	×	J,E, 1	T,E,20	T,E,40	T,E,40	×	S,E, 1 1/2	J,E, 3/4	N	JE	N	J,E	J,E	J,E, 1/3	S,E, 1/2	J,E	S,E, 5
	DATE OF MEASUREMENT	1964	1963	27, 1966	:	10, 1942 15, 1967	9, 1955 23, 1966	23, 1966	4, 1966	15, 1966	1966	1934	28, 1966	1940	28, 1966	op	30, 1966	1962	1953	1953
EVEL	MEA	Jan.		June		June Feb.	Dec. Nov.	Nov.	Nov.	Aug.	June		June	Feb.	June	je	June	Nov.		Мау
WATER LEVEL	ABOVE (+) OR BELOW LAND SURFACE DATUM (FT)	173	181	51.5	:	180.7	161.4 195.8	165.0	21.6	176.3	44	100	41.0	115	17.1	31.0	19.6	143	09	08
	ALTITUDE OF LAND SURFACE (FT)	412	416	407	407	380	381	379	368	385	330	310	325	235	341	280	270	326	255	282
	WATER- BEAR- ING UNITS	Ev	Ev	O	Ü	Ev, C	B	Ę	o	Ev	Ev	Ev	O	Ev	o	Ev	o	ΕV	Ev	E,
CASING	DIAM- ETER (IN)	7	3	2	2	п	11	п	36	4	2	e	4	1	2	84	10	4	2	œ
	DEPTH OF WELL (FT)	362	473	06	65	365	912	903	35	355	129	300	20	428	84	02	36	280	230	931
	DATE COM- PLET- ED	1964	1963	ı	1965	1941	1951	1956	:	1966	1966	1934	1964	1940	1942	1944	1963	1962	1953	1953
	OWNER	Afton Park Subdivision	D.L. Crider	Eldie Cornet	op	City of Willis, well 1	City of Willis, well 2	City of Willis, well 3		H.E. Harrison	R.B. Howard	Mrs. W.O. Bellnoski	Mr. Young	J.W. Frazier Drilling Co.	Mrs. J.D. Pursley	•	Ernest L. Schlemmer	W.L. Massey	Camp Agnes Arnold (Girl Scouts of America)	op
	WELL	* TS-60-37-304	306	307	308	401	402	403	404	405	406	408	501	503	504	505	602	701	702	703
		*	*		+	*	*	*		*	+-	*	+		+		*			Contraction of the last of the

See footnotes at end of table.

Table 7. -- Records of Wells in Montgomery and Adjacent Counties -- Continued

				CASING			WATER I	EVEL			
WELL	OWNER	DATE COM- PLET- ED	DEPTH OF WELL (FT)	DIAM- ETER (IN)	WATER - BEAR - ING UNITS	ALTITUDE OF LAND SURFACE (FT)	ABOVE (+) OR BELOW LAND SURFACE DATUM (FT)	DATE OF MEASUREMENT	METHOD OF LIFT	USE OF WATER	REMARKS
TS-60-37-7	04 R.C. Hulon (pre. F.W. Shaver)	before 1931	50	36	С	340	43.8 41.6	Nov. 13, 1931 June 30, 1966	J,E	U	Well abandoned for lack of water
* 7	07 Brabham and Parker Lumber Co.	1967	75	4	С	360	34 est.	July 1967	S,E, 3/4	Ind	Reported yield 41 gpm. Screened from 65-75 ft.
7	08 do	1946	75	4	C	360	43.7	July 9, 1967	N	U	Screened from 65-75 ft. Well replaced by well TS-60 37-707.
8	Ol Texas Cattlemans Security		48	4	С	276	35.9	June 30, 1966	В,Н	S	Red ceramic casing.
8	02		64	36	С	287	44.9	do	в,н	D	Concrete casing.
8	03 Morris K. Wommack	1954	7,952			312		"			0il test. 2/
† 9	01 C.N. Nicholson	1965	229	3	Ev	279	80	1965	J,E, 1 1/2	D	Screened from 221-229 ft.
† 9	O2 Carl Currie	1966	221	3	Ev	210	54	June 1966	J,E, 1	D	Reported yield 8 gpm. 3-in. slotted steel from 215-220 ft. 1/
† 9	03 Sam Nichols	1900	35	36	C	261	29.2	June 28, 1966	J,E, 1/3	D	Concrete casing.
9	04 S.C. Boone	1965	75	2	Ev	228	50	Oct. 1965	J,E, 3/4	D	Reported yield 2 gpm. 2-in. per- forated plastic casing from 65- 75 ft. 1/
38-1	02 Tran-State Oil Co.	100	5,219			345	4-				Oil test. 2/
t 4	01 Thomas McCrorey	1955	58	36	C	305	51.5	July 8, 1966	J,E, 1/2	D	Concrete casing.
t 5	06 O.B. Smith	before 1945	42	12	C	272	33.8 35.2	July 8, 1966 Oct. 13, 1966	J,E, 1/2	D	Do.
† 7	01 Mrs. G.D. Roach		65	6	С	285	54	July 1966	J,E	D	Plastic casing. Good water.
7	02 Mrs. Charles Reeves		75	2	С	270	50.8	July 8, 1966	N	U	
8	01 Finch-Jacobson	1964	1,000	6	JU	224	22.0 21.4	Dec. 9, 1965 Apr. 18, 1967	N	υ	Perforated screen from 990-1000 ft. 2/3/
8	04		20	96	С	265	12.4	Sept. 16, 1966	N	υ	Concrete casing.
8	05 Finch-Jacobson	1964	19	6	C	224	12.0 13.0	Dec. 9, 1965 Apr. 18, 1967	N	υ	3/
42-2	01 Mike Mock	1966	283	4	Ev	270	65.2	Jan. 4, 1967	S,E, 1	D	Screened from 273-283 ft.
2	02 Robert and James Herzog	1965	166	4	Ev	295	64	Aug. 1965	S,E, 1	D	Reported yield 23 gpm. 2-in. slotted steel from 146-161 ft. 1/2
31	01 W.T. Jones, well 1	1955	225	4	Ev	278	88.4	Dec. 28, 1966	S,E, 1 1/2	D.	Well recently re-worked. Pump and rust problem. Reported yield 25 gpm. Screened from 215-225 ft.

Table 7. -- Records of Wells in Montgomery and Adjacent Counties -- Continued

				CASING			WATER L	EVEL				
WELL	OWNER	DATE COM- PLET- ED	DEPTH OF WELL (FT)	DIAM- ETER (IN)	WATER- BEAR- ING UNITS	ALTITUDE OF LAND SURFACE (FT)	ABOVE (+) OR BELOW LAND SURFACE DATUM (FT)		ATE OF SUREMENT	METHOD OF LIFT	USE OF WATER	REMARKS
TS-60-42-302	Erie Williams	1940	25	36	Ev	250	24.7	Jan.	4, 1967	в,н	D	Concrete casing.
303	The Texas Co.	1935	578	6	JU	212	+	June	1942		υ	Well destroyed.
304	B.R. Moore (Dobbins School)	1938	640	5	JU	242	5.5	May	1942	N	υ	Do.
305	Mr. Moon (pre. Texas Co. well 2)	1907	440	10	Ev,JU	212	+ 17.0	Dec.	8, 1966	Flows	D	Screened from 190-225 ft, 297- 309 ft, and 427-440 ft. Measure yield 8 gpm. Measured drawdown 14 ft.
306	R.C. Cartes (old Stinson estate)	1910	2,400	6	υt	215	+ 10.0	Dec.	28, 1966	Flows	D	Measured yield 8 gpm. Originall oil test.
307	Gulf, Colorado, and S.F. R.R.	1913	746	8	JU	250	+		1913		U	Well destroyed. 1/
501	A.C. Coumes	1965	247	4	Ev	299	126	June	1965	J,E, 2	D	Reported yield 10 gpm. 2-in. slotted steel from 227-247 ft.
601	J.M. Griffith	1956	153	4	Ev	250	38.7	Jan.	4, 1967	S,E	D	Screened from 143-153 ft.
901	Toby Smith	1966	98	4	Ev	268	44	July	1966	S,E	D	3-in. slotted steel from 86-98 ft. 1/
43-101	O.C. Garvey and Todd	1938	3,500			272			1			0il test. 2/
102	J.R. Little	1965	162	2	Ev	255	52	Sept.	1965	J,E, 3/4	D	Reported yield 20 gpm. Screened from 149-159 ft. 1/
201	Kieth Dickson	1940	682	2 1/2 - 4	JU	328	105.5	June	5, 1940	N	U	Well destroyed in 1964. Reporte yield 12 gpm. Drawdown 76 ft. 1
202	do	1964	700	4	Ev	338	163.6	Oct.	31, 1966	S,E	D	Screened from 660-680 ft.
203	A.B. Hamil	1962	404	4 - 2	Ev	285	100	Aug.	1962	т,Е, 3	D	2 1/2-in. slotted steel screen from 221-241 ft, 280-293 ft, an 314-339 ft. Reported yield 30 g Reported drawdown 40 ft after 8 hours. 1/
301	W.S. Taliver	1965	269	2	Ev	233	79	Sept.	1965	J,E, 1	D	Reported yield 5 gpm. Screened from 263-269 ft. 1/
302	Paul Hoffart	1965	338	4 - 2	Ev	270	97.1	Oct.	31, 1966	S,E, 2	D	2 1/2-in. slotted steel from 31 338 ft. Reported yield 60 gpm. Reported drawdown 99 ft after 2 hours. 1/
304	F.A. Callery	1952	4,762			235	T. 1					0i1 test. 2/
401	K.S. Nicoll	1950	287	2	Ev	186	40		1950	J,E, 1	D	Screened from 279-287 ft.
402	Mrs. Bell	1966	306	4	Ev	203	0	Aug.	1966	S,E	D	Screened from 296-306 ft.

Table 7. -- Records of Wells in Montgomery and Adjacent Counties -- Continued

WELL	OWNER	DATE COM- PLET- ED	DEPTH OF WELL (FT)	CASING DIAM- ETER (IN)	WATER- BEAR- ING UNITS	ALTITUDE OF LAND SURFACE (FT)	WATER LEVEL				
							ABOVE (+) OR BELOW LAND SURFACE DATUM (FT)	DATE OF MEASUREMENT	METHOD OF LIFT	USE OF WATER	REMARKS
TS-60-43-501	Horse Stables	1966	515	2	Ev	303	130	1966	J,E	υ	Screened from 500-515 ft.
502	J.H. Kurth, Jr.	1964	363	4	Ev	223	17.9	Oct. 19, 1966	S,E, 5	D	Screened from 323-363 ft. 1/
503	Lake 77 Subdivision	1965	79	6 - 4	C	359	48	Oct. 1965	S,E	P	4-in. screen from 71-79 ft.
504	do	1961	420	4	Ev	320	130	Nov. 1961	S,E, 3	P	Reported yield 70 gpm. Slotted steel from 400-420 ft.
601	James L. Slowey	1966	127	2	Ev	268	33	Mar. 1966	J,E, 3/4	D	Reported yield 11 gpm. Plastic screen from 117-127 ft. 1/
602	Mrs. Rabon		100	2	Ev	262	15.7	Oct. 19, 1966	J,E	U	Screens falled.
701	Mr. Cochrane	1950	198	2	Ev	203	22	1950	J,E	D	Slotted steel from 190-198 ft.
702	John Waters	1964	188	2	Ev	208	14	Oct. 1964	J,E, 3/4	D	Reported yield 8 gpm. Slotted steel from 141-147 ft. 1/
703	J. Neeves	1965	79	2	Ev	239	30	April 1965	J,E, 1/2	D	Reported yield 15 gpm. Slotted steel from 69-75 ft. 1/
801	Billy Woods	1941	100	6	Ev	173	+ 18.5	Dec. 9, 1966	Flows	P	Measured yield 5 gpm with drawdown of 16 ft.
802	Mr. Presley		125	3	Ev	253	50	1966	J,E	D	
901	E.B. Heathcoth	1965	390	2	Ev	232	67	Apr. 1965	J,E, 1 1/2	D	Reported yield 7 gpm. Slotted steel from 380-390 ft. 1/
44-101	T.J. Wood	1939	5,034			210					Oil test. 2/
102	D.W. Taylor	1950	327	4	Ev	242	83.9	Oct. 18, 1966	N	U	Well abandoned, screens failed.
103	Bill Newton	1946	385	3	Ev	195	84	1966	J,E, 1	D	Screened from 379-385 ft.
104	B.J. Higgins	1964	227	2	Ev	280	69	June 1964	J,E, 3/4	D	2 3/8-in. slotted steel from 22 227 ft. 1/2
105	Lake Lorraine	1964	385	4	Ev	285	110.9	Oct. 17, 1966	S,E, 3	P	4-in. slotted steel from 365-38 ft.
201	J.C. Foretich	1951	285	4	Ev	132	+ 4.1	do	A,E	D	Measured yield 2 1/8 gpm. Well flowing for 10-14 years.
202	Texas and Southwestern Cattle Raisers Assn. Inc.		25	36	Ev	165	7.1 6.2	Oct. 31, 1966 June 26, 1969	N	Ü	
203	Mrs. Libie Vick	1966	450	4	Ev	183	36.6	Oct. 17, 1966	S,E, 1 1/2	P	Screened from 440-450 ft.
204	do	1963	109	4	Ev	185	17.3	do	S,E, 1	P	Reported yield 25 gpm. Screened from 84-94 ft. 1/
205	Jacobs Ranch		100	4	Ev	184	18.8	Nov. 4, 1966	P,W	U	Abandoned windmill.

Table 7.--Records of Wells in Montgomery and Adjacent Counties--Continued

					CASING			WATER I	LEVEL		1	
W	ELL	OWNER	DATE COM- PLET- ED	DEPTH OF WELL (FT)	DIAM- ETER (IN)	WATER - BEAR - ING UNITS	ALTITUDE OF LAND SURFACE (FT)	ABOVE (+) OR BELOW LAND SURFACE DATUM (FT)	DATE OF MEASUREMEN	METHOD OF LIFT	USE OF WATER	REMARKS
TS-6	0-44-206	H.W. Treadway, Jr.		150	4	Ev	170	3.3	Oct. 17, 19	66 J,E	D	
	301	A.D. Gerrell	1964	315	4	Ev	150	+ 25 est.	Oct. 19	66 S,E	D	Screened from 307-315 ft. Yield of 3 3/4 gpm with pump; flows slightly without pump.
*	302	G.A. Wilkson	1965	422	4 - 2	Ev	190	13.5	Oct. 17, 19	66 S,E, 1	D	Reported yield 10 gpm. Screened from 406-422 ft. 1/
	401	Charles Glass	1963	207	3	Ev	248	73	June 19	63 J,E, 1	D	Screened from 191-203 ft. Reported yield 40 gpm. 1/2
	402	Wayne Broyles	1924	891	8 - 6	JU	255	15.6 42.2	June 23, 19 Oct. 19, 19	42 N 66	U	Screened from 828-891 ft. 1/
*	403	do	1900	22	36	С	243	1.1	Oct. 10, 19	42 J,E, 3	Ind	
	404	Billy Woods	1920	100	3	Ev	196	+ .9	Oct. 18, 19	66 Flows	P	Estimated yield 3 gpm.
*	501	Timber Lumber Co.	1936	546	4	Ev	268	85	June 19	36 N	υ	Well reported destroyed 10 yrs. ago.
*	502	do	1941	200	6	Ev	268	69	Aug. 19	41 N	U	Do.
	503	John E. Sykora	1965	184	4	Ev	253	63.8	Oct. 18, 19	56 S,E, 3/4	D	Plastic ribbed screen from 174- 184 ft. Reported yield 10 gpm. 1/
	504		1960	70	36 - 2	С	264	59.3	do	В,Н & Ј,Е	D	
	505			140	36	Ev	274	62.0	do	в,н	D	
	506	Charles S. Scott	1965	422	4 - 2	Ev	212	39	Dec. 19	55 J,E	D	Screened from 401-422 ft. 1/
	507	Fish Gas and Oil Co.	1955	6,216			231					Oil test. 2/
*	601	R. Scott	1939	428	4	Ev	140	+ 10	Oct. 19	56 S,E	D	Screened from 365-375 ft, and 418-428 ft. Yields 10 gpm. June 3, 1942 flow was 90 gpm.
*†	602	Conroe Country Club	1940	784	6 - 4	Ev	177	34.8	July 1, 19	56 T,E	P	Screened from 597-619 ft and 682- 704 ft. Reported yield 50 gpm with 32 ft drawdown.
	606	Flynt Emmons	1964	390	6	Ev	136	+ 13.0	Dec. 7, 19	66 Flows	D	Screened from 380-390 ft. Yield 1 gpm with drawdown of 12 ft.
27	607		1	20	36	С	188	15.8 7.1	Oct. 18, 19 June 26, 19		D	Concrete casing.
	608	John Puckett		60	36	Ev	200	50.0 50.1	Oct. 18, 19 June 26, 19		D	Concrete casing. Owner claimed seismic crew damaged well; had to deepen it to obtain water.

Table 7. -- Records of Wells in Montgomery and Adjacent Counties -- Continued

					CAS	ING			WATER L	EVEL		1		
	WELL	OWNER	DATE COM- PLET- ED	DEPTH OF WELL (FT)	DIA ETI	AM = ER	WATER - BEAR - ING UNITS	ALTITUDE OF LAND SURFACE (FT)	ABOVE (+) OR BELOW LAND SURFACE DATUM (FT)		ATE OF SUREMENT	METHOD OF LIFT	USE OF WATER	REMARKS
TS	S-60-44-609	L.G. Wood		800		5	Ev	172	13.2	Oct.	18, 1966	J,E	D	Owned reported that well flowed 1,095 gpm for 25-30 years, then declined to no flow in 1948.
	702	H.E. Norman	1965	160		4	Ev	214	84.4	Oct.	18, 1966	S,E, 1/	2 D	Screened from 150-160 ft. Reported yield of 5 gpm. 1/
	801	Superior Oil Co.	1942	163		4	Ev	142	+ 5.56	Oct.	13, 1942	N	ū	Screened from 106-128 ft. Well supplied oil test. Abandoned. 1/
Ť	803			120		4	Ev	143	8.9	Nov.	28, 1966	N	U	
	902	Humble Oil Co.	1955	6,503	- 1-		12. 2	168						0il test. <u>2</u> /
	903	-		85		3	Ev	196	72.5	Nov.	28, 1966	N	U	
776	45-101	Walton Greenhouse	1958	340		•	Ev	282	72.5	June	30, 1966	N	U	Well abandoned in 1959 because of rust problem and lack of water. Screened from 324-340 ft.
la de	103	L.O. Gundy	1950	30	30	5	С	235	26.3	July	1, 1966	N	υ	The well had good quantity, but rusty water. Well abandoned when owner obtained city water.
	104	R.E. Hix and J.W. Bolinghouse	1940	48	31	5	С	276	44.4 45.7		3, 1940 16, 1955	N	υ	Destroyed in 1956. Was observation well. 3/
*	105	Panorama Development Co.	1964	1,103	10	- 6	JU	265	82.4	July	8, 1964	T,E	P	Screened from 970-1090 ft. Supplies golf course and subdivision. Reported yield 510 gpm with drawdown of 49 ft. 1/2/
	106	R.E. Hix		50		5	С	276	16.0 44.7		13, 1931 3, 1939	N	ŭ	Destroyed. 3/
*	107	J.M. Liles		21		1	С	252	10.9 9.6	June June	10, 1940 1958		U	Do. 3/
	108	do		18		1	С	252	11.6 10.0		8, 1940 16, 1959		U	Do. <u>3/</u>
	201	Montgomery County Airport	1943	609	11	- 7	Ev	235	70	Sept	. 1943	т,Е,25	Ind	Screened from 542-608 ft. Reported yield of 130 gpm with drawdown of 66 ft. <u>1</u>
t	202	Addie Patterson	1964	115		4	Ev	226	33.8	July	5, 1966	S,E, 1	D	Screened from 105-115 ft.
*†	203	Lee M. Johnson	1964	95		3	С	243	29.7		do	J,E, 3/	4 D	Screened from 89-95 ft.
	301	Sam T. Howell	1962	80		3	C	220	37.9	July	14, 1966	N	U	Screened from 70-80 ft. Abandoned.
	302	Morris K. Womack	1955	5,022	-	-		253				17		Oil test. 2/

Table 7. -- Records of Wells in Montgomery and Adjacent Counties -- Continued

					(	CASING	Table			WATER I	EVEL				
WEL	L	OWNER	DATE COM- PLET- ED	DEPTH OF WELL (FT)	in the second	DIAM- ETER (IN)	WATER - BEAR - ING UNITS	ALTITUDE OF LAND SURFACE (FT)	BELO	(+) OR I LAND E DATUM T)		ATE OF SUREMENT	METHOD OF LIFT	USE OF WATER	REMARKS
* TS-60-	-45 <del>-</del> 401	J.S. Hunt and R.E. Floyd	1913	1,100		6	JU	190	+ 10	est.	June	1942		U	Well destroyed. Reported yield 100 gpm in 1942.
*	402	City of Conroe	1966	1,393	6	- 10	JU	230	32.	7	Jan.	12, 1967	T,E,75	P	Screened from 930-1,000 ft. and 1,030-1,140 ft. Reported yield 1200 gpm with drawdown of 204 ft. 1/2/2
*	403	Guy Hooper	1940	887	4	- 6	JU	232	30			1940	N	U	Destroyed.
	406	Artesian Lakes Estate	1920	631		5	Ev	155	+ 1.	5	Dec.	7, 1966	Flows	D	Reported yield of 2 gpm. 2/
*	407	Wayne H. Edwards	1965	511		2	Ev	232	76		May	1965	J,E, 1	D	Screened from 501-511 ft. 1/
	408	J.S. Hunt and R.E. Floyd	1914	1,172	10	- 6	JU	190	12.	1	June	3, 1942	N	U	Destroyed. 1/
	409	Texas Highway Department		34		30	С	190	32. 25.			18, 1938 3, 1941	N	U	Do. 3/
*	501	City of Conroe	1956	1,280		17	Ju	215	25.	2	Jan.	13, 1967	T,E,100	P	Screened from 910-16 ft; 1020-70 ft; 1110-20 ft; 1130-40 ft; 1155-65 ft; 1180-1240 ft; and 1250-70 ft. Reported yield of 1200 gpm. 2/
	502	Gulf States Ult. and Conroe Water Works	1938	221	16	- 8	Ev	214	64		May	1938	N	ט	Destroyed. When drilled well had reported yield of 500 gpm and drawdown of 46 ft.
*	503	City of Conroe, well 4	1954	1,332	16	- 10	Ju	212	25. 30.			20, 1954 13, 1967	T,E,75	P	Screened from 950-970 ft; 1090- 1105 ft; 1135-1155 ft; 1200-1250 ft; 1258-1268 ft; and 1300-1320 ft. Reported yield 1000 gpm and drawdown of 118 ft. 2/
sk	504	City of Conroe, well 2	1924	1,221	8	- 6	JU	214	26 <b>.</b> 25 <b>.</b>			16, 1956 15, 1967	N	U	Screened from 1099-1163 ft and 1185-1221 ft. Reported yield 440 gpm with 72 ft drawdown in June 1942. 3/
*	505	City of Conroe, well 1	1909	1,464	8	- 6	Ju	214	+ 23.			3, 1931 4, 1955	N	U	Destroyed June 16, 1955 by construction. 1/3/
	506	Gulf, Colorado and S.F. Railroad	1917	1,282	8	- 6	Ju	214	+ 2.	3	June	3, 1931		U	Destroyed. Reported yield 110 gpm with 8 ft drawdown June 24, 1942.
*	507	City of Conroe	1948	1,280		16	Ju	205	+ 12.			16, 1948 13, 1967	T,E,50	P	Screened from 1050-1107 ft and 1143-1238 ft. Reported yield 750 gpm with 76 ft drawdown measured Jan. 13, 1967. 3/
	508	Comroe Creosoting Co.	1966	165		4	Ev	194	35		Sept.	1966	A,E	Ind	Screened from 159 to 165 ft.
	509	Humble Camp, well 3	1947	1,244			JU	175		- 11			N	U	Destroyed. 2/

Table 7. -- Records of Wells in Montgomery and Adjacent Counties -- Continued

Γ						CASING			WATER	LEVEL						
	WELL	OWNER	DATE COM- PLET- ED	DEPTH OF WELL (FT)		DIAM- ETER (IN)	WATER - BEAR - ING UNITS	ALTITUDE OF LAND SURFACE (FT)	ABOVE (+) OR BELOW LAND SURFACE DATUM (FT)		ATE (		(	THOD OF IFT	USE OF WATER	REMARKS
*	TS-60-45-510	Conroe Ice Plant	1932	220		8	Ev	215	64	Feb.		1932	N		U	Destroyed. 2j
*	511	Gulf States Utilities	1921	205		6	Ev	214					N		Ū	Do.
+	602	L.M. Runnels	1963	100		2	С	212	60			1963	A,E,	3/4	D	Screened from 90 to 100 ft.
	603	Farm Market		65		10	Ev	218	48.2	July	12,	1966	J,E		D	
	604	Jefferson Chemical Co.	1958	160		4	Ev	209	49.5	Oct.	24,	1966	N		U	Destroyed on Oct. 24, 1966.
*	605	Jefferson Chemical Co., well 6	1966	168	18	- 8	Ev	196	52	Dec.		1966	T,E		Ind	Screened from 128 to 168 ft. Reported yield of 210 gpm with drawdown of 38 ft. 1/2
*	606	Jefferson Chemical Co., well 4	1962	1,120	11	- 7	Jū	206	+				T,E		Ind	Screened from 885-906 ft; 950- 971 ft; and 1019-1101 ft. Report- ed yield 505 gpm. Well flows, pumped all the time. 1/2/
	607	Jefferson Chemical Co., well 5	1964	172	15300	9	Ev	201	45	Feb.		1964	T,E		Ind	Screened from 127-167 ft. Reported yield 175 gpm with 24 ft drawdown. 1/
*	608	Columbia Carbon Co., well 9	1964	1,100	14	- 9	JU	193	+ 17	Oct.		1966	T,E		Ind	Screened from 879-895 ft; 910- 920 ft; 925-945 ft; 975-995 ft; 1015-1065 ft; and 1070-1080 ft. Reported yield 710 gpm with 125 ft drawdown. 1/2/
*	609	Norvell-Wilder Supply Co.	1942	164		3	Ev	207	55	May		1942	N		U	Destroyed.
	610	do	1953	629		4	Ev	207	66.1	July	14,	1966	N		U	Unused.
*	611	Humble Oil Co.	1932	715	13	- 9	Ev	192	30			1942	N		U	Destroyed.
	701	Mrs. Dan A. Madeley	1920	1,100	6	- 4	JU,Ev	140	+ 8.5	Nov.	10,	1966	J,E,	1/3	D	Flows 12 gpm. Supplies 15 acre lake.
*	702	Camp Martha F. Madeley (Girl Scouts of America)	1938	660	6	- 4	Ev	120	+ 20 7.9	Oct. Nov.	10,	1942 1966	S,E,	3/4	P	Screened from 640 to 660 ft. 125 gpm yield reported on Oct. 1942.
	703	do	1963	643	2	- 4	Ev	127	15.4	Nov.	10,	1966	S,E,	3/4	P	Screened from 569 to 589 ft and 610-630 ft. 1/
	704	Camp Strake	1938	1,165	8	- 6	JU	133	+ 57.5	Mar.		1957	F1o	ws	P	Screened from 1100 to 1160 ft. Reported yield 70 gpm.
	705	Toots Alley	1966	598		4	Ev	147	29.0	Nov.	10,	1966	S,E		D	Screened from 588 to 598 ft.
*	706	Elizabeth Moody	1941	136		3	Ev	120	+ 4.2	May Feb.		1941 1967	Flow N	ws	U	Unused. Screened from 121 to 136 ft. 3/
*	801	L. Johnson	old	33		48	C	136	26.2 30.3	June Oct.	3, 4,	1931 1940	N		U	Destroyed December 5, 1940, by highway construction. 3/

Table 7. -- Records of Wells in Montgomery and Adjacent Counties -- Continued

				CASTNG	-		WATER LEVEL	EVEL			-	
WELL	OWNER	DATE COM- PLET-	DEPTH OF WELL	DIAM- ETER	WATER- BEAR- ING	AL OF SU	ABOVE (+) OR BELOW LAND SURFACE DATUM	D	DATE OF MEASUREMENT	METHOD		E REMARKS
		ED	(FT)	(II)	UNITS	(FT)	(FT)			717	WATEK	EK
† TS-60-45-802	J.R. Gentry	1963	20	00	O	155	27.4	June	17, 1966	J,E,	1/3 D	· · · · · · · · · · · · · · · · · · ·
803	Brown Estate	1	26	75	O	178	24.4	Nov.	18, 1931 18, 1967	×	n	Observation well. 3/
804	River Plantation	1966	148	9	Ev	138	18,6	Nov.	10, 1966	Z	ы	New well on observation date. Possibly pump added.
* 805	Walter M. Mischer	1964	702	11 - 7	EV	124	17	Oct.	1964	T, E, 40	А	Screened from 595-690 ft. Reported yield 360 gpm with 90 ft drawdown. $y  2 / z$
908	M.H. Crighton	1931	210	9	Ev	163	3.6	Nov. Dec.	18, 1938 19, 1939	N	D	Destroyed. 3
901	C.B. Comstock	1	180	. е	Ev	186	47.4	July	6, 1966	N	D	Abandoned. Screened from 170-180 ft.
902	Tidewater Oil Co.	1957	123	4	Ev	159	33.4	June	20, 1966	A,E	Ind	Screened from 116-122 ft.
* 903	Conroe Pipeline Co.	1934	360	:	Ev	150	:		1	N	Þ	Destroyed.
906	Humble Oil Co.	1948	5,501	•	1	189	•	41	1	1	•	oil test. 2
* 905	Tom C. Myrick	1960	1111	2	Ev	156	30	July	1967	A, E, 1	Q	Screened from 105 to 110 ft.
*† 46-101	A.G. Boeger	1962	525	7	Ev	220	53.5	July	6, 1966	S,E, 1	Q	Screened from 500 to 525 ft.
102	Thelbert Sheffield	1963	182	2	EV	206	43	Nov.	1963	A, E	О	Screened from 159 to 165 ft, Reported yield 25 gpm, $\underline{\mathcal{Y}}$
+ 201	M.W. Atkinson	1955	09	2	υ	231	43.5	July	6, 1966	J,E, 1	Q	Screened from 54-60 ft.
202	Tony Allen	1966	06	9	U	260	64.5	July	9, 1966	J,E,	3/4 D	Screened from 84-90 ft. Reported yield 7 gpm with 15 ft drawdown.
+ 203	E.L. Walter	1946	23	84	υ	217	16.6	July	12, 1966	J,E,	1/3 D	
204	Rigley Owens (KNRO Radio)	1964	09	2	Ev	187	16	Dec.	1964	J,E,	1/3 Ind	Screened from 52-58 ft. Reported yield 1 $\mathrm{gpm.}\ \underline{J}$
+ 301	Mrs. Donald Mayeux	1900	30	48	υ	204	16.4	July	6, 1966	J,E	Ω	
303	William G. Vaughn	1965	121	2	Ev	199	643	Dec.	1965	J,E,	3/4 D	Reported yield 4 gpm. Screened from 111-121 ft. $\underline{1}\underline{1}$
401	O.B. Combest	1948	62	10	b	184	54.8	July	13, 1966	N	n	Unused.
404	Austin School	1	186	4	Ev	196	36.3	July	6, 1966	A,E	д	Screened from 180 to 186 ft.
t 405	Lois Lang	1946	25	10	O	183	14.9	July	13, 1966	В, Н	Q	
501	Rice University Property (G.D. Huff)	1955	09	4	EV	209	49.5	July	6, 1966	N	D	Abandoned because of iron prob- lem.

See footnotes at end of table.

Table 7. -- Records of Wells in Montgomery and Adjacent Counties -- Continued

				CASING			WATER L	EVEL			
WELL	OWNER	DATE COM- PLET- ED	DEPTH OF WELL (FT)	DIAM- ETER (IN)	WATER- BEAR- ING UNITS	ALTITUDE OF LAND SURFACE (FT)	ABOVE (+) OR BELOW LAND SURFACE DATUM (FT)	DATE OF MEASUREMENT	METHOD OF LIFT	USE OF WATER	REMARKS
TS-60-46-502	E.D. Kirkland		23	4	С	175	11.2	July 12, 196	N	U	Unused.
503	Mrs. Bussell	1965	263	4	Ev	180	35.3	July 14, 196	S,E	D	Screened from 243 to 263 ft.
504	Humble Oil Co.	1948	5,469			164					0i1 test. <u>2</u> /
601	Berlie West	1938	50	36	С	177	10.4	July 6, 196	J,E, 1/3	D	Well has iron problem.
602	Charlie Grimes	1963	135	6	Ev	192	45.9	do	J,E, 1	D	
603	F.J. Hos	1965	39	10	С	177	17.2	July 12, 1966	J,E	D	
604	Curtis Hankamer	1958	7,212	-		165					0i1 test. 2/
702	J.P. Keefer		31	10	С	174	20.3	July 13, 1966	N	U	Unused.
703	Midland Gasoline Corp.	1948	200	14 - 8	Ev	187	56.1	do	T,E,10	Ind	Screened from 165 to 190 ft.
704	Humble 011 Co.	1948	200	18 - 10	Ev	162	38	195	T,E,25	Ind	Screened from 122 to 143 ft and 152 to 197 ft. Reported yield 420 gpm with drawdown of 51 ft.
705	do	1947	200	20 - 10	Ev	162	32	1954	Т,Е,25	Ind	Screened from 120 to 142 ft and 157 to 198 ft. Reported yield 420 gpm with 41 ft drawdown.
706	do	1932	628	6	Ev	150	+	June 1942	N	U	Destroyed.
707	Charles B. Wrightsman	1964	158	3	Ev	145	18	Aug. 1964	Ј,Е	D	Originally drilled to 227 ft, plugged back to 158 ft. Report yield 7 gpm. Screened from 148 158 ft. 1/2
708	Pladger Phenix	1964	196	4 - 2	Ev	160	39	July 1964	S,E, 1/2	D	Screened from 140 to 160 ft. 1/2
709	The Texas Co.	1933	177	6	Ev	140	44	1930	N	U	Destroyed.
801	Humble Oil Co.	1941	664	5	Ev	159	2.5	June 26, 1942	N	U	Destroyed. 1/
803	M.S. Tweedle	1965	119	4	Ev	168	40	1965	A,E, 1	D	
804	W.H. Cook		20	3	С	144	14.5	July 12, 1966	Р,Н	D	
901	Ellen Greenhaur	1950	30	10	С	136	11.8	do	N	υ	Unused.
47-102	Mrs. Frederick Lange	1960	28	10	C	170	7.6	May 26, 1966	J,E	D	
404	J.A. Gray	1943	6,024			126					0i1 test. 2/
405		1941	35	8 - 2	С	180	13.0	May 26, 1966	J,E	D	
406	Walls Bar-B-Que	1956	30	12	С	172	3.3	do	J,E	D	
407/	John L. McShan	1963	32	10	C	144	7.5	do	J,E	D	Poor quantity.

Table 7.--Records of Wells in Montgomery and Adjacent Counties--Continued

			T .	I		CASING			T	WATER L	EVEL.				
WELL		OWNER	DATE COM- PLET- ED	DEPTH OF WELL (FT)		DIAM- ETER (IN)	WATER - BEAR - ING UNITS	ALTITUDE OF LAND SURFACE (FT)	B	OVE (+) OR ELOW LAND RFACE DATUM (FT)	D	ATE OF SUREMENT	METHOD OF LIFT	USE OF WATER	REMARKS
*† TS-60-47	7 <b>-</b> 501	Mrs. J.I. Smith	1955	180		4	Ev	156		30	May	1966	J,E, 1	D	Screened from 172 to 180 ft.
	502	W.H. Holton	1961	44		8	C	158		2.3	May	25, 1966	J,E	D	
t	503	W.E. Gray	1965	186		4	Ev	152		30.0		do	S,E, 1	D	Screened from 180 to 186 ft.
	504			60		2	С	145		24.6		do	N	U	
	601	Tennessee Gas Transmission Co.	1946	1,235		6	טנ	160	+	2.8	Jan.	26, 1966	т,Е, 5	Ind	Screened from 1168 to 1188 ft and 1199 to 1219 ft. Flows 2.5 gpm (170 gpm when drilled).
	602	do	1950	1,214	12	- 8	JU	154		7.6	Jan.	28, 1966	T,E	Ind	Screened from 1156 to 1171 ft and 1193 to 1211 ft. Reported yield of 140 gpm. 2/
	603	do	1951	1,340		6	JU	164	+		# "		T,E, 7 1/2	Ind	Screened from 1092-1102 ft; 1192- 1198 ft; 1204-1216 ft; 1254-1265 ft, and 1295-1313 ft. Reported yield 130 gpm. 2/
	604	Amerada Petroleum Co.	1948	12,792				155							0i1 test. <u>2</u> /
rk	605	Foster Lumber Co., well 4	1937	1,191	6	<del>-</del> 5	Ju	170		3.3	Jan.	26, 1966	N	U	Screened from 1130 to 1150 ft and 1164 to 1189 ft.
	606	Foster Lumber Co., well 1	1907	806		8	Ev	170		.6	June	5, 1942	N	Ū	Screened from 766 to 806 ft. 1/
	607	Foster Lumber Co., well 2	1914	809		8	Ev	172	+	10 7.0	Jan.	1914 26, 1966	N	υ	3/
	608	Foster Lumber Co., well 3	1918	1,222		6	JU	173		11.2	Jan.	26, 1966	J,E	υ	Screened from 1134 to 1154 ft and 1164 to 1201 ft.
	609	Foster Lumber Co., well 5	1948	1,219	6	- 4	JU	173		6	Dec.	1948	T,E	D	Screened from 1151 to 1191 ft. Reported yield 200 gpm. 1/
t	610	M.E. Webb	1961	300		2	Ev	141		15		1961	J,E	D	Screened from 290-300 ft.
42	612	Halbouty Operator		158		2	Ev	153		39.4	July	9, 1967	N	ט	
*	613	Warren Petroleum Corp.	1960	170		8	Ev	156		42 est.	July	1967	T,E,15	Ind	Screened from 150 to 160 ft.
	701	Otis Collins	1955	198		4	Ev	147		22	Mar.	1966	J,E, 1/4	D	Screened from 190 to 198 ft.
	702	Ella Pitman	1937	32	12	- 2	С	142		11.7	May	27, 1966	J,E, 1/2	D	
	703	Mr. Johnny		110		2	Ev	130		10			J,E	D	
†	801	M.H. Lumpkin	1966	279		2	Ev	127		31	Apr.	1966	J,E, 1/3	D	Screened from 271 to 279 ft.
	802	J.H. Rutherford, Sr.	-22	57		8	С	151		35.6	May	25, 1966	J,E	D	
	803	Bertha Gilmora	1953	39		8	С	130		16.4		do	J,E	D	

Table 7.--Records of Wells in Montgomery and Adjacent Counties--Continued

		11 11 11 11 11 11 11 11			CASING			WATER I	EVEL		1	T	
WELL	OWNER	DATE COM- PLET- ED	DEPTH OF WELL (FT)		DIAM- ETER (IN)	WATER- BEAR- ING UNITS	ALTITUDE OF LAND SURFACE (FT)	ABOVE (+) OR BELOW LAND SURFACE DATUM (FT)	Г	OATE OF SUREMENT	METHOD OF LIFT	USE OF WATER	REMARKS
TS-60-47-901	M.A. Whitmore	1926	50		12	С	148	31.0	Мау	25, 1966	в,н	D	
902	Mrs. Singleton	1	71	4	- 2	С	131	23.0		do	J,E	D	
50-301	Tommie Goodson	1966	73		4	Ev	258	56		1966	S,E	D	Screened from 67 to 73 ft.
302	City of Magnolia	1925	1,452	8	- 6	JU	268	83	Dec.	1966	T,E,10	P	Screened from 1307 to 1389 ft.
601	Charles Bashman	1958	720		6	Ev	252	122.6	Dec.	30, 1966	S,E, 7 1/2	P	Screened from 470 to 530 ft. Reported yield 150 gpm.
602	A.C. Gale	1962	114		4	Ev	243	39.9	Jan.	4, 1967	J,E, 1/2	D	Screened from 104 to 110 ft.
603	Roscoe Seyle		115		3	Ev	266	57.9	Dec.	30, 1966	N	υ	Abandoned.
605	do	1941	360		4	Ev	238	73.1	Oct.	13, 1942	N	U	Destroyed.
606	do	1941	580		4	Ev	238	72.9		do	N	U	Do.
901	H.C. Nichols	1966	168	4	- 2	Ev	240	81		1966	S,E	D	Screened from 158 to 168 ft.
51-101	R.L. Watson	1966	120		4	Ev	243	47.7	Dec.	6, 1966	S,E, 1	D	Screened from 110-120 ft.
102	Morris Dean	1951	9		3	С	280	7.2	Dec.	15, 1966	N	U	
103	T.A. Satterwhite	1966	170		2	Ev	292	82	May	1966	A,E, 1	D	Screened from 162 to 170 ft. Reported yield 10 gpm. 1/
202	Gray and Wolf Drilling Co.		160		4	Ev	232	62.9	Dec.	7, 1966	S,E	Ind	
203			31		8	С	242	25.7		do	J,E	D	
204	Frank McWhorter	1966	170		4	Ev	215	56	Aug.	1966	J,E	D	y
301	Superior Oil Co., well 3	1945	210	8	- 4	Ev	235	81 84.8	Sept. Dec.	1945 6, 1966	T,E,10	Ind	Screened from 173 to 208 ft. 1
302	Superior Oil Co., well 2	1942	200	8	- 6	Ev	235	84 88.4	Dec.	1942 6, 1966	N	ט	Screen from 186 to 207 ft. 1/3/
303	Superior Oil Co.		89		4	Ev	211	56.4	Dec.	6, 1966	N	U	
306	do	1941	450		4	Ev	187	35.7	Dec.	6, 1966	N	U	Screened from 124 to 148 ft. For merly supplied boiler for oil test.
401	Mitchell-Mitchell Corp.	1920	147		4	Ev	260	65.2	Dec.	14, 1966	N	U	Screened from 180 to 200 ft.
402	do	1940	124		6	Ev	240	46.4		đo	N	U	
403	do	1927	282	10	- 4	Ev	262	67	Dec.	1966	N	υ	Screen from 272 to 282 ft.
502	W.C. Brautigam	1930	50		30	С	220	39.1	Oct.	13, 1942	N	U	Destroyed.

Table 7.--Records of Wells in Montgomery and Adjacent Counties--Continued

Г															667												
	REMARKS	Screened from 450 to 500 ft.		Screened from 630 to 650 ft.	Screened from 201 to 211 ft. $\mathcal{Y}$			Screened from 287 to 307 ft.	Screened from 170 to 178 ft.	Screened from 190 to 200 ft.	Destroyed.	Screened from 172 to 180 ft. $\underline{\mathcal{Y}}$	Screened from 181 to 191 ft.	Destroyed.	Screened from 588-620 ft; 657-667 ft; and 687-757 ft. Reported yield 440 gpm with drawdown of 69 ft. $\underline{I}$		Destroyed. 1	Screened from 250 to 257 ft.	Destroyed.	Screened from 293 to 308 ft.	Screened from 158 to 164 ft.	Oil test.	Screened from 200 to 210 ft.			Destroyed.	
	USE OF WATER	D	D	D	D	n	n	Ы	Q	Q	Ω	ы	Q	n	Ind	Ind	n	D	n	D	D	:	D	D	Q	D	
	METHOD OF LIFT	S,E, 1 1/2	S,E, 1/2	S,E	S,E, 1/2	N	N	S,E	A, E	S,E, 1	N	A, E	J,E	N	I,E,50	T,E	Z	A, E	N	S,E, 1	A,E	1	S,E, 2	J,E	J,E	N	
	DATE OF MEASUREMENT	8, 1968	15, 1966	8, 1966	8, 1966	7, 1966	op	30, 1966	1961	15, 1966	1942	1966	1956	13, 1942	1942	1952 1	1942	1963	13, 1966	2, 1966	do do	1	29, 1966	28, 1966	2, 1966	13, 1942	
EVEL	D	Dec.	Dec.	Dec.	Dec.	Dec.		Dec.		Dec.		June		Oct.	Nov.	Nov.	Nov.		Oct.	Dec.			Nove	Nov.	Dec.	Oct.	
WATER LEVEL	ABOVE (+) OR BELOW LAND SURFACE DATUM (FT)	6.44	6.94	0.86	83.1	30.0	11.9	55.5	30	39.7	32	04	25	12.2	84	65 74.6	48	49	5.8	72.5	50.0	1	71.3	26.9	23.0	5.9	
	ALTITUDE OF LAND SURFACE (FT)	251	232	197	250	190	214	206	192	196	176	173	167	164	213	213	213	207	153	194	206	175	187	195	198	165	
	WATER- BEAR- ING UNITS	Ev	Ev	Ev	Ev	O	C	Ev	Ev	Ev	Ev	Ev	Ev	O	Ev	ΕV	Ev	Ev	Ev	Ev	Ev	:	Ev	O	O	O	
CASING	DIAM- ETER (IN)	7	4	4	4	2	2	7	٣.	- 3	3	2	3	9	. 7	∞ .	- 7	- 2	4	7 -	7	;	4	36	36	9	
L				_						4		_			12	14	12	5		9						2.	
	DEPTH OF WELL (FT)		105	650	211	32	24	308	178	200	147	180	191	23	768	213	786	257	209	310	164	3,516	210	30	29	22	
	DATE COM- PLET- ED	:	1962	1963	1962	1	1	1966	1961	1965	1942	1966	1956	1936	1942	1943	1942	1963	1942	1964	1966	1929	1962	1936	1946	1932	
	OWNER	Lester Goodson	A.C. Rickett	James P. Springer	Lester Goodson	1	:	John Lorino	A.R. Coe, Jr.	F.D. Daily	O.L. Laird	Dr. M.D. Meredith	H.C. Brunner	Mrs. Nettie Brunner	Superior Oil Co., well 1	Superior Oil Co.	Superior 0il Co.	Edd H. Coe	Superior Oil Co.	Mr. A.W. Goodson	Thomas G. Sayers	Cullen-West Production Co.	R.E. McDonald	J.R. Winslow	E.L. Carraway	J.W. Johnson	
	WELL	TS-60-51-503	504	505	905	109	602	702	802	803	901	902	906	902	52-101	102	104	105	106	201	202	204	301	302	401	403	
L				*							*				*	*	*										

See footnotes at end of table.

Table 7.--Records of Wells in Montgomery and Adjacent Counties--Continued

				CASING			WATER I	EVEL			
WELL	OWNER	DATE COM- PLET- ED	DEPTH OF WELL (FT)	DIAM- ETER (IN)	WATER - BEAR - ING UNITS	ALTITUDE OF LAND SURFACE (FT)	ABOVE (+) OR BELOW LAND SURFACE DATUM (FT)	DATE OF MEASUREMENT	METHOD OF LIFT	USE OF WATER	REMARKS
TS-60-52-601	W. Stewart Boyle	1954	6,007			166		36.0	1-1		Oil test. 2/
702	Frank Rabel	1959	120	3	Ev	170	27	Sept. 1959	J,E	D	Screened from 112 to 120 ft. Re- ported yield 25 gpm.
703	Wm. Snooks	1947	138	2	Ev	167	38	1947	J,E	D	Screened from 130 to 138 ft.
704	Christie-Mitchell and Mitchell	1954	6,296			149					011 test. 2j
706	J.M. Williams	1964	141	3	Ev	160	25	Apr. 1964	J,E, 3/4	D	Screened from 132 to 140 ft. 1/
806	Frank Martin	1966	134	2	Ev	135	23	June 1966	A,E, 1	D	Screened from 126 to 134 ft. 1
53-101	D.W. Phillips Lumber Co.		59	4	Ev	126	14.4	Sept. 20, 1966	J,E, 3/4	Ind	Screened from 50 to 59 ft.
102	John F. Adams	1965	78	2	С	184	31	July 1965	J,E, 3/4	D	Screened from 68 to 78 ft. Reported yield 12 gpm. 1/
103	W.G. Jones State Forest	1954	212	4	Ev	167	48	1954	J,E, 1	D	Reported yield 12 gpm. Screened from 190-211 ft. 1/2
104	do	1964	209	4	Ev	173	58.7	Sept. 20, 1966	S,E, 1 1/2	P	Screened from 187-207 ft. 1/
105	Bassetts S. Winmill	1955	5,699			165		2-11.191			Oil test. 2/
201	C.C. MacMillian	1927	385	4 -	3 Ev	130	13.8	do	J,E	D	Flowed in 1931 at 5 gpm; 1937 at 6 1/2 gpm; and in 1938.
202	Ted Brannon	1965	99	3	Ev	130	18	May 1965	J,E, 1	Ind	Screened from 89-99 ft. 1/
203	G.J. Backannon	1964	150	4	Ev	121	15.5	Nov. 21, 1966	S,E, 3/4	D	Screened from 140-150 ft.
301	Cockfield Salt Water Disposal Co.	1964	180	2	Ev	112	12.8	June 23, 1966	A,E	Ind	Screened from 175-180 ft.
302	C. Layton	1966	195	2	Ev	156	36	June 1966	A,E, 1	D	Reported yield 30 gpm. Screened from 182-192 ft. 1/
303	George Strake	1938	648	6	Ev	124	+ 1.5	June 23, 1966	F1ows	U	Screened from 636-648 ft.
304	Gar-Flo Oil Co.	1936	225	4	Ev	106	8.2	Aug. 6, 1966	N	U	Screened from 204-225 ft.
305	Sun Oil Co.	1933	193	4	Ev	153	37.4	Sept. 10, 1942	N	U	Destroyed.
306	Gar-Flo Oil Co.	1936	246	4	Ev	106	4.0	June 23, 1966	N	U	Screened from 126-246 ft.
307	Humble Oil Co.	1936	392	6 -	4 Ev	105	+ /4	June 1942		υ	Destroyed. Stopped flowing in 1961.
308	Tidal Pipeline Co.	1932	198	6 -	4 Ev	125	0.6	Oct. 9, 1942	N	υ	Destroyed.
309	do	1938	518	4	Ev	125	+ 5	Oct. 1942		U	Do.
310	H.L. Huffman	1960	20	8	С	145	11.5	July 9, 1967	J,E	D	

Table 7. -- Records of Wells in Montgomery and Adjacent Counties -- Continued

				CASTNG	NG NG	ľ	T	WATER LEVEL	EVEL					
		DATE	DEPTH				E	ABOVE (+) OR						
WELL	OWNER	COM- PLET- ED	OF WELL (FT)	DIAM- ETER (IN)		BEAR- ING UNITS	OF LAND SURFACE (FT)	BELOW LAND SURFACE DATUM (FT)	DAT	DATE OF MEASUREMENT	METHOD OF LIFT	USE OF WATER	REVARKS	
* TS-60-53-311	C. Layton	1967	148	2		Ev	156	48.5	July	9, 1967	A, E	Q	Screened from 138 to 148 ft. Water salty.	
405	Daral M. Lallal	:	760	7		Ev	144	50		1966	T,E, 3	D	Screened from 450 to 460 ft.	
403	•	1	009	4		Ev	152	56.2	Sept. 1	16, 1966	S,E, 3	D		
707	•	1	06	36		Ev	144	29.5		op	J,E, 1	D		
501	A.J. Rod and Co.	1904	1,720	9		Ev	121	32,3	Aug. 2	24, 1966	S,E, 5	D	Screened from 800-810 ft.	
502	H.J. Schott	1902	1,800	00	4	5	122	+ 46	Aug.	1902	Flows	д	Reported yield 750 gpm. Estimated yield 450 gpm. Screened from 1540 to 1580 ft.	
503	Blair and Sons	1	21	24		U	130	16.2	Nov. 1	18, 1931 1953	N	Ω	Destroyed. 3/	
504	E.W. Gastleschouldt	1	35	24		v	149	29.8	June June	2, 1931 10, 1958	В, Н	n	Destroyed on September 17, 1958 by road construction. 3	
909	R. Joe Savoie	1965	211	4		Ev	148	57.2	Sept. 1	18, 1966	S,E, 1 1/2	D	Screened from 201 to 211 ft.	
507	1	1	09	24		o	142	28.0	Aug. 2	26, 1966	Z	n		
208	Charles Rod	1964	250	7		Ev	119	33.5		op	S,E	D	Screened from 240 to 250 ft.	
209	Tamina Barber Shop	:	07	2		O	137	27.3	Sept. 16,	1966	J,E, 1/4	Ind		
601	Clyde Paul	1939	274	- 4	2	Ev	- 26	+ 12.5 10	June 2 Aug.	25, 1942	J,E, 1	О	Screened from 188 to 208 ft and 264 to 274 ft. Flowed 60 gpm September 1939.	
603	C.C. Collier	1962	340	4		Ev	116	70		1962	J,E	D	Screened from 330 to 340 ft.	
604	op	1952	04	3		O	116	20.7	Aug. 1	19, 1966	N	n	Abandoned because of iron prob- lem and screen failure.	
909	Clyde Paul	1960	287	2		Ev	117	25.5	,o	do	J,E, 1/2	Q		
909	:	:	26	2		0	112	18.4	0	op	В,Н	Ω		
701	Monroe	1964	220	4		Ev	132	18.5	-0	op	S,E	D	Screened from 210 to 220 ft.	
704	Kendal Oil Corp.	1964	508		9	Ev	135	53.5	Aug. 2	26, 1966	S,E	Д	Screened from 331 to 346 ft, 346 to 366 ft, 388 to 403 ft, 470 to 485 ft, and 485 to 500 ft. 2	
902	Grogan's Mill	before 1931	173	9	20 O	Ev	145	23.2	June	2, 1931	M	n	Destroyed.	
801	H.M. Lee	1964	230	4		Ev	123	57.9	Aug. 2	26, 1966	S,E	D		
802	Sinclair 0il Go.	1	45	- 4	2	O	119	21.0		op	J,E	Ind		
See footnotes	See footnotes at end of table.													

See footnotes at end of table.

Table 7. -- Records of Wells in Montgomery and Adjacent Counties -- Continued

П					CASING	1		WATER I	EVEL		T	
	WELL	OWNER	DATE COM- PLET- ED	DEPTH OF WELL (FT)	DIAM- ETER (IN)	WATER - BEAR - ING UNITS	ALTITUDE OF LAND SURFACE (FT)	ABOVE (+) OR BELOW LAND SURFACE DATUM (FT)	DATE OF MEASUREMENT	METHOD OF LIFT	USE OF WATER	REMARKS
	TS-60-53-803	Slick Oil Co.	1958	6,093			114					0i1 test. 2/
	804	E.B. Hable and Son, Inc.	1966	272	4	Ev	130	51.1	Nov. 14, 1966	S,E, 2	Ind	Screened from 262 to 272 ft.
*	805	Lake Chateau Woods	1965	236	4	Ev	122	38.2	Aug. 24, 1966	S,E, 3	P	Reported yield 78 gpm. Screened from 210 to 236 ft. 1/
*	806	do	1906	825	4	Ev,C	139	+ 1.0	do	Flows	U	Originally 1700 ft oil test; plugged in 1916 to 825 ft.
	807	Oak Ridge North	1966	234	4	Ev	132	49.3	do	S,E, 1	P	Screened from 204 to 214 ft and 224 to 234 ft.
	808	do	1964	239	4	Ev	136	53.2	do	S,E, 5	Р	Screened from 219 to 229 ft and 229 to 239 ft.
*	809	do	1965	247	4	Ev	123	49.6	do	S,E, 5	P	Screened from 227 to 247 ft.
	810	C.W. Coffey	1955	6,207	Tales		145		Thi			Oil test. 2/
	901	Saunders	1955	220	4	Ev	118	44.4	Aug. 27, 1966	S,E	D	Screened from 210 to 220 ft.
	54-101	Humble Club	1966	195	2	Ev	154	44.3	June 21, 1966	S,E	P	Reported yield 13 gpm. Screened from 185 to 195 ft. 1/
	102	Humble Oil Co.		165	10	Ev	153	2.6	June 23, 1966	N	U	
	103	Sun Oil Co.	1933	163	4	Ev	155	29.2	Oct. 9, 1942	N	U	Destroyed.
ŀ	201	W.D. Granger	1941	120	3	Ev	152	28	Oct. 1942	N	U	Do.
†	301	Frank Beeson	1956	45	10	С	135	18.5 17.1	June 15, 1966 June 26, 1969	J,E	D	
	302	Atlantic Refinery Co.	1944	10,708	16		132		427			Oil test. 2j
t	303	R.D. Lea		209	2	Ev	132	18	1966	J,E, 1/2	D	Screened from 199 to 209 ft.
t	304	James Dugat		50	12	C	122	13.5 14.5	June 15, 1966 June 26, 1969	J,E, 1/3	D	
*	305			39		C	131				D	Reported yield 5 gpm.
t	401	Morgan		40	4	С	147	19.9	June 10, 1966	J,E, 1/3	D	
	402	G.A. Nelson	1964	130	2	Ev	137	42	Dec. 1964	J,E, 1/2	D	Screened from 125 to 131 ft. 1
	403	John O'Brien	1963	35	2	С	140	6.8	June 10, 1966	P,E, 1/4	D	
t	502	R.R. Ranson	1964	222	2	Ev	128	38	1964	J,E, 1	D	Screened from 212 to 222 ft.
t	503	Charles Owen		210	2	Ev	136	30	1966	J,E, 1/2	D	Screened from 200 to 210 ft.
†	601	T.V. Gilchrist		129	2	C	113	25		Р,Н	D	Screened from 126-129 ft.

Table 7. -- Records of Wells in Montgomery and Adjacent Counties -- Continued

REMARKS	CONTRACTOR OF THE PARTY OF THE		Well abandoned 1962. Screened from 57-63 ft.	Reported yield 20 gpm. Screened from $102-112$ ft. $\underline{1}$	Screened from 144-154 ft.			Screened from 90-100 ft.	Screened from 150-160 ft.	Screened from 188-198 ft.			Reported yield 6 gpm. Screened from 252-258 ft. $\underline{\mathcal{Y}}$		Screened from 290-296 ft.	Screened from 120-130 ft.	Screened from 315-325 ft.		Screened from 127-187 ft.		Screened from 317-327 ft.	0il test. 2	Reported yield 40 gpm. Screened from 546-556 ft.	Yield 2 1/4 gpm. Drawdown 8 ft. Screened from 984-988 ft, and 1018-1026 ft.	
USE	WATER	А	Þ	Д	Q	Q	п	Q	Q	Q	Q	Q	А	Q	Q	n	А	n	Q	Q	Ind	!	D	Д	
METHOD	LIFT	В,Н	N	J,E, 1/4	J,E, 1/2	В,Н	N	J,E	J,E, 1/2	J,E, 1	op	J,E, 1/2	J,E, 1/2	В,Н	J,E	J,E, 1/2	S,E, 3	N	J,E	N	J,E, 1	:	S,E, 2	Flows	
DATE OF WEASIIREMENT	TWO OWNERS	June 16, 1966 June 26, 1969	June 15, 1966	1964	1960	June 16, 1966 June 26, 1969	June 15, 1966	1964	1966	Oct. 1955	1	June 10, 1966	July 18, 1962	у 27, 1966	1	ly 1936	у 27, 1966	у 27, 1967	t. 1965	у 27, 1966	ly 1957	:	t. 1961	8. 8, 1966	
ABOVE (+) OR BELOW LAND SIRPACE DATIM		16.6 Ju 15.6 Ju	9**9	19 July	15	21.7 June 23.9 June	19.1	40	30	111 0c	25	29.8 Ju	20 Ju	2.5 May	7	35 July	37.5 May	2.2 May	28 Oct.	25.6 May	31 July	1	48 Oct.	+ 7.6 Aug.	
ALTITUDE OF LAND STIRFACE		125	109	109	106	126	113	125	119	107	110	113	120	101	107	126	122	113	119	119	126	106	108	93	
WATER- BEAR- ING	UNITS	U	O	O	Ev	O	ပ	O	O	Ö	o	o	Ev	υ	Ev	Ü	Ev	D	Ev	D	Ev	1	Ev	Ev	
CASING DIAM-	(IN)	10	ĸ	2	2	24	3	2	2	2	2	10	2	10	2	3	4	80	2	9	2	1	7	7	
DEPTH OF WELL	(FT)	20	63	120	154	50	06	100	160	198	70	55	258	19	296	130	325	25	287	165	327	3,065	556	1,287	
DATE COM-	ED ED	1	1941	1964	1960	1910	;	1964	;	1955	1	1964	1962	1953	1962	1936	1964	1940	1965	1964	1953	1945	1961	1954	
ORNER	OWNER	Nancy E. Breed	John F. Freeman	op	J.W. Oakes	Mrs. Pickering	Owen Dry	Raymond Garrett	Joe Osburn	Mr. Casper	P.R. Mitchell	Carl Scott	L.E. Jernigen	J.E. Duke, Jr.	Roy Granton	Montgomery County School Dist.	H.J. Boucher	Pondarosa Ranch	H.J. Boucher	op	Splendora Lumber Co.	Humble Oil Co.	W.D. Laird	H.L. Patton	
WELL	TTGM	+ TS-60-54-602	603	+ 604	t 605	909 +	209	108 +	4 802	+ 902	+ 903	4 604	55-202	203	*† 204	* 301	303	304	4 305	306.	* 308	405	501	* 502	

See footnotes at end of table.

Table 7.--Records of Wells in Montgomery and Adjacent Counties--Continued

Γ			T	1	CASING			WATER L	EVEL		1		
	- WELL	OWNER	DATE COM- PLET- ED	DEPTH OF WELL (FT)	DIAM- ETER (IN)	WATER- BEAR- ING UNITS	ALTITUDE OF LAND SURFACE (FT)	ABOVE (+) OR BELOW LAND SURFACE DATUM (FT)	D.F	ATE OF SUREMENT	METHOD OF LIFT	USE OF WATER	REMARKS
	TS-60-55-503	H.L. Patton	1964	250	6	Ev	101	40.6	Aug.	8, 1966	S,E	D	Drawdown 5 ft. Screened from 240- 250 ft.
	504	Philip Dearing	1965	80	2	С	110	36	Jan.	1965	J,E	D	Reported yield 6 gpm. Screened 70-78 ft. 1/
*	505	H.L. Patton	1933	640	6 - 4	Ev	89	19.4	Aug.	8, 1966	J,E	P	Reported yield 25 gpm. Screened 600-640 ft. Flowed until 1955.
	506	do		250	4	Ev	89	27.0		do	S,E	D	
*	507	do	1957	932	4	Ev	90	+ 13 est.	1 7 1 2 2 7 1 1 1 1 1 1 1 1 1 1 1 1 1 1	do	Flows	Р	Flows 2 1/2 gpm. Screened from 912-932 ft.
	601	do	1956	1,200	4	Ev	97	+ 6 est.		do	S,E	P	Flows 25 gpm (est.). Screened from 984-988 ft; 994-998 ft; and 1018-1026 ft.
*	701	New Caney High School	1938	250	6	Ev	99				N	U	Screened from 200-250 ft.
t	702	New Caney Jr. High School	1937	160	4	C	99	40		1965	S,E	P	
	703	S.J. Oakley	1960	315	4	Ev	100	30	June	1966	J,E, 3/4	D	
+	704	New Caney High School		150	4	Ev	100	36.6	June	6, 1966	S,E	P	
	705	Pearl Kidd	1960	142	3	Ev	95	30			J,E	D	
	801	John Calhoun	1966	169	2	С	74	17	May	1966	J,E, 3/4	D	Reported yield 6 gpm. Screened from 159-169 ft. 1/
	802	San Jacinto Girl Scouts	1956	285	5	Ev	67	27.9	June	6, 1966	S,E, 5	P	
	803	B.O. Dixon	1958	168	2	С	82	30		1958	J,E	D	Screened from 158-168 ft.
	804	do	1951	97	2	С	77	35		1951	J,E, 3	D	
	805	Judge A. Campbell	1940	200	3	С	70	10		1940	N	U	Destroyed.
	901	D.V. Robinson	1963	82	4	С	65	16	Mar.	1963	J,E, 1 1/2	D	Screened from 60-70 ft. 1
+	902	H.V. Whitley	1950	210	2	Ev	102	55		1950	J,E, 1	D	Reported yield 12 gpm.
+	903	Champion Rod and Gun Club	1952	225	4	Ev	105	135		1952	J,E, 1	P	Screened from 200-225 ft.
1	904	San Jacinto Girl Scouts	1965	353	4 - 2 1/2	Ev	80	54.3	June	6, 1966	S,E, 1 1/2	P	Screened from 333-353 ft. 1/
	905	do	1962	101	3	С	80	42	Apr.	1962	N	U	Destroyed. 1/
	58-205	A.D. McMillian	1965	160	2	Ev	243	75	June	5, 1966	J,E, 1	D	Screened from 152-160 ft. 1
	301	Mrs. G.C. Calvert	1958	27	2	С	199	10.4	Jan.	4, 1967	J,E, 1/3	D	
	59-202	M.C. Michel	1956	186	3	Ev	185	40		1956	J,E	D	

Table 7. -- Records of Wells in Montgomery and Adjacent Counties -- Continued

					CASING			WATER L	EVEL			
	WELL	OWNER	DATE COM- PLET- ED	DEPTH OF WELL (FT)	DIAM- ETER (IN)	WATER - BEAR - ING UNITS	ALTITUDE OF LAND SURFACE (FT)	ABOVE (+) OR BELOW LAND SURFACE DATUM (FT)	DATE OF MEASUREMENT	METHOD OF LIFT	USE OF WATER	REMARKS
	TS-60-59-205	Christie-Mitchell-Mitchell	1954	5,702			190	4				0i1 test. 2/
	305	Paul Stonesifer	1964	95	4	Ev	164	15	1964	J,E	D	
*	61-201	Sinclair Oil Corp.	1955	400	9 - 6	Ev	112	45.8	June 26, 1966	S,E, 2 1/2	Ind	Reported yield 60 gpm. Screened from 370-400 ft.
	203	Steen Woods	3.3.87.2	300	4	Ev	116	54.2	Aug. 26, 1966	S,E	D	
	205	Purswell	1950	67	4	С	99	9.6	do	N	U	
*	206	C.L. Fitch	1926	455	4	Ev	99	+ 12.0	June 1, 1931		U	Destroyed. 1
	302	Archer Dev. Co.	1966	333	6 - 4	Ev	106	46.7	Aug. 26, 1966	S,E, 5	P	Reported yield 100 gpm. Screened from 315-330 ft.
	303	O.E. Wilcoxson	145	73	4	Ev	105	31.6	do	Flows	U	
*	304	Mrs. Oscar Locke	1964	198	4	C	111	12	1964	J,E	D	
	62-301	Floyd Oil Co.	1938	6,617			108		and the transfer of			Oil test. 1/2/
*†	302	Lillian Dumble	1966	331	6	Ev	100	62.7 62.9	June 8, 1966 June 16, 1966	S,E, 3/4	D	Screened from 320-330 ft.
†	303	Floyd Sorter	1963	190	2	Ev	92	60	1963	J,E	D	
	601	Baker Brothers	1917	992	4	Ev	81	+ 1.0	Aug. 29, 1966	Flows	P	<u>y</u>
	602	John P. Wheeler	1962	57	2	C	84	14	Apr. 1962	J,E, 1/3	D	Reported yield 30 gpm. Screened from 51-57 ft.
	63-101	H.L. McConnell	1962	74	2	C	96	29.0	June 8, 1962	A,E, 1	D	Reported yield 5 gpm. Drawdown 4 ft. Screened from 68-74 ft. 1/
†	102	Daic Drago	1965	100	4	С	101	34.5 35.8	June 20, 1966 June 27, 1969	J,E, 1/2	D	Screened from 80-100 ft.
†	103	Walker	1965	358	2	Ev	100	37	Feb. 1965	J,E, 1 1/2	D	THE BOOK WAS ASSETTING
*	105	New Caney Independent School Dist.	1966	393	6 - 4	Ev	100	65.8	June 7, 1966	S,E,15	P	Reported yield 236 gpm. Screened from 332-352 ft and 373-393 ft.
	201	E.N. Oakley	1954	38	28	C	100	26		J,E	D	San Tille 1865 July 18
	202	Mrs. J.D. Scott	1965	251	2	Ev	82	50	Mar. 1965	J,E, 1	D	and an experience of the second secon
+	401	Mr. Samford	1964	67	.3	C	80	18.0	June 9, 1966	J,E	P	
	402	Sam Moreno	1966	255	6	Ev	80	50.3	do	S,E, 1 1/2	D	Screened from 240-250 ft.
	403	V.H. Edwards	1962	81	4	С	77	15	May 1962	J,E, 1/3	D	Reported yield 5 gpm. Drawdown 25 ft. Screened from 70-78 ft. 1

Table 7. -- Records of Wells in Montgomery and Adjacent Counties -- Continued

WELL		DATE	DEPTH		TTA MITTE	A T IN TIME TO		the second second				
WELL		COM-	OF	DIAM-	WATER - BEAR -	OF LAND	ABOVE (+) OR BELOW LAND		ATE OF	METHOD	USE	
	OWNER	PLET -	WELL (FT)	ETER (IN)	ING UNITS	SURFACE (FT)	SURFACE DATUM (FT)	MEAS	SUREMENT	OF LIFT	OF WATER	REMARKS
				<u>G</u>	rimes Co	unty						
W-60-18-701	Atlantic Pipeline Go.	1928	160	4	JU	380				J,G, 2	Ind	Screened from 140-160 ft.
26-205	W.F. Lucas	1924	32	24	JU	398	25.7	Dec.	16, 1942	в,н	D	
701	L.W. Keisler	1959	720	4 - 2	JU	319	96.9	Jan.	6, 1966	S,E, 3	P	Screened from 700-720 ft.
702	T.J. Haynie	1939	192	4	JU	320	50		1939	P,E, 1/3	D	Screened from 172-192 ft.
703	S.B. McKinney	1922	450	4	JU	300	18		1941	P,E, 3/4	D	Screened from 400-450 ft.
704	Magnolia Pipeline Co.	1939	160	4	JU	272	5.6	Dec.	16, 1942	N	U	Destroyed.
705	T.H. Lee	1922	180	3	JU	289	45.8		do	N	ט	Unused since 1938.
706	O.A. Hamilton		65	8	Ev	332	48.5	Dec.	4, 1942	в,н	D	
34-101	S.B. Barrett Estate	1902	21	36	Ev	305	10.9	Dec.	3, 1942	в,н	D	
801	John Rosilier	1927	54	24	Ev	276	49.4	Dec.	2, 1942	в,н	D	
42-101	Walter Greenwood	1939	200	4	Ev	335	75	Nov.	1942	P,E, 1	D	Screened from 194-200 ft.
103	Frank Phillips	1928	151	4	Ev	315				P,W	D	
502	Searcy Smith		33	30	С	275	26.2	Nov.	27, 1942	в,н	D	
702	George Largent	1939	130	3	Ev	292				P,H	D	
801	R.L. McGraw	1939	35	36	С	290	28.3	Nov.	27, 1942	P,H	D	
802	de la companya de		625	4		305				N	U	Destroyed. 1/
				H	arris Co	unty						
J-60-52-801	G.W. Strake	1958	215	8	Ev	158	44.5	Apr.	12, 1960	T,G	Ind	Reported yield 350 gpm.
805	Mr. Schweinle	1939	902	4 1/2	Ev	140	40		1950	J,E	D	Flowed until 1950.
58-501	Hegar Brothers, well 2	1947	1,160	24	JU	244	107	Oct.	23, 1963	T,G	Irr	Well probably only about 500 ft deep, due to cave-ins. 2/
59-204	Doyle	1966	235	4 - 2	Ev	232	87.3	Dec.	21, 1966	S,E, 3/4	D	Screened from 225-235 ft.
303	Houston Lighting and Power	1965	340	4	Ev	182	57	Sept.	1, 1965	T,E, 5	Ind	Reported drawdown 13 ft. Screened from 289-299 ft and 304-324 ft.
503	The Texas Co.	1953	5,766	10		206						0il test. 2/
60-103	City of Tomball, well 3	1957	412	16	Ev	180	64 65.8	Feb.	1958 15, 1967	т,Е,20	P	Screened from 260-296 ft; 310-360 ft; and 370-400 ft. Reported yield 1100 gpm. Reported drawdown 61 ft. 2/3/
	701 702 703 704 705 706 34-101 801 42-101 103 502 702 801 802  J-60-52-801 805 58-501 59-204 303 503	26-205 W.F. Lucas 701 L.W. Keisler 702 T.J. Haynie 703 S.B. McKinney 704 Magnolia Pipeline Co. 705 T.H. Lee 706 O.A. Hamilton 34-101 S.B. Barrett Estate 801 John Rosilier 42-101 Walter Greenwood 103 Frank Phillips 502 Searcy Smith 702 George Largent 801 R.L. McGraw 802  J-60-52-801 G.W. Strake 805 Mr. Schweinle 58-501 Hegar Brothers, well 2 59-204 Doyle 303 Houston Lighting and Power 503 The Texas Co.	26-205       W.F. Lucas       1924         701       L.W. Keisler       1959         702       T.J. Haynie       1939         703       S.B. McKinney       1922         704       Magnolia Pipeline Co.       1939         705       T.H. Lee       1922         706       O.A. Hamilton          34-101       S.B. Barrett Estate       1902         801       John Rosilier       1927         42-101       Walter Greenwood       1939         103       Frank Phillips       1928         502       Searcy Smith          702       George Largent       1939         801       R.L. McGraw       1939         802           J-60-52-801       G.W. Strake       1958         805       Mr. Schweinle       1939         58-501       Hegar Brothers, well 2       1947         59-204       Doyle       1966         303       Houston Lighting and Power       1965         503       The Texas Co.       1953	26-205       W.F. Lucas       1924       32         701       L.W. Keisler       1959       720         702       T.J. Haynie       1939       192         703       S.B. McKinney       1922       450         704       Magnolia Pipeline Co.       1939       160         705       T.H. Lee       1922       180         706       O.A. Hamilton        65         34-101       S.B. Barrett Estate       1902       21         801       John Rosilier       1927       54         42-101       Walter Greenwood       1939       200         103       Frank Phillips       1928       151         502       Searcy Smith        33         702       George Largent       1939       130         801       R.L. McGraw       1939       35         802        625          J-60-52-801       G.W. Strake       1958       215         805       Mr. Schweinle       1939       902         58-501       Hegar Brothers, well 2       1947       1,160         59-204       Doyle       1966       235         303<	W-60-18-701 Atlantic Fipeline Co.  26-205 W.F. Lucas  701 L.W. Keisler  702 T.J. Haynie  703 S.B. McKinney  704 Magnolia Fipeline Co.  705 T.H. Lee  706 O.A. Hamilton  706 O.A. Hamilton  707 S.B. Barrett Estate  801 John Rosilier  801 John Rosilier  1927 54  42-101 Walter Greenwood  1939 200  42-101 Walter Greenwood  1939 200  103 Frank Phillips  502 Searcy Smith  702 George Largent  801 R.L. McGraw  1939 35  801 R.L. McGraw  1939 35  801 G.W. Strake  802  1939 902  4 1/2  59-204 Doyle  303 Houston Lighting and Power  1965 340  4 503  The Texas Co.  1953 5,766  10	M-60-18-701	W-60-18-701 Atlantic Pipeline Co. 1928 160 4 JU 380  26-205 W.F. Lucas 1924 32 24 JU 398  701 L.W. Keisler 1959 720 4 - 2 JU 319  702 T.J. Haynie 1939 192 4 JU 320  703 S.B. McKinney 1922 450 4 JU 300  704 Magnolia Pipeline Co. 1939 160 4 JU 272  705 T.H. Lee 1922 180 3 JU 289  706 O.A. Hamilton 65 8 Ev 332  34-101 S.B. Barrett Estate 1902 21 36 Ev 305  801 John Rosilier 1927 54 24 Ev 276  42-101 Walter Greenwood 1939 200 4 Ev 335  103 Frank Phillips 1928 151 4 Ev 315  502 Searcy Smith 33 30 C 275  702 George Largent 1939 130 3 Ev 292  801 R.L. McGraw 1939 35 36 C 290  802 625 4 305  Mr. Schweinle 1939 902 4 1/2 Ev 140  58-501 Hegar Brothers, well 2 1966 235 4 - 2 Ev 232  303 Houston Lighting and Power 1965 340 4 Ev 182	W-60-18-701 Atlantic Pipeline Co. 1928 160 4 JU 380 26-205 W.F. Lucas 1924 32 24 JU 398 25.7  701 L.W. Keisler 1959 720 4 - 2 JU 319 96.9  702 T.J. Haynie 1939 192 4 JU 300 18  704 Magnolia Pipeline Co. 1939 160 4 JU 272 5.6  705 T.H. Lee 1922 180 3 JU 289 45.8  706 O.A. Hamilton 65 8 Ev 332 48.5  34-101 S.B. Barrett Estate 1902 21 36 Ev 305 10.9  801 John Rosilier 1927 54 24 Ev 276 49.4  42-101 Walter Greenwood 1939 200 4 Ev 335 75  103 Frank Phillips 1928 151 4 Ev 315 502 Searcy Smith 33 30 C 275 26.2  702 George Largent 1939 130 3 Ev 292 801 R.L. McGraw 1939 35 36 C 290 28.3  802 625 4 305  Harris County  J-60-52-801 G.W. Strake 1939 902 4 1/2 Ev 140 40  58-501 Hegar Brothers, well 2 1947 1,160 24 JU 244 107  59-204 Doyle 1966 235 4 - 2 Ev 232 87.3  303 Houston Lighting and Power 1965 340 4 Ev 182 57  503 The Texas Co. 1953 5,766 10 206 60-103 City of Tomball, well 3 1957 412 16 Ev 180 64	W-60-18-701 Atlantic Pipeline Co. 1928 160 4 JJU 380 26-205 W.F. Lucas 1924 32 24 JJU 398 25.7 Dec. 701 L.W. Keisler 1959 720 4 - 2 JJU 319 96.9 Jan. 702 T.J. Haynie 1939 192 4 JJU 320 50 703 S.B. McKinney 1922 450 4 JJU 300 18 704 Magnolia Pipeline Co. 1939 160 4 JJU 272 5.6 Dec. 705 T.H. Lee 1922 180 3 JJU 289 45.8 706 O.A. Hamilton 65 8 Ev 332 48.5 Dec. 34-101 S.B. Barrett Estate 1902 21 36 Ev 305 10.9 Dec. 801 John Rosilier 1927 54 24 Ev 276 49.4 Dec. 42-101 Walter Greenwood 1939 200 4 Ev 335 75 Nov. 103 Frank Phillips 1928 151 4 Ev 315 502 Searcy Smith 33 30 C 275 26.2 Nov. 702 George Largent 1939 130 3 Ev 292 801 R.L. McGraw 1939 35 36 C 290 28.3 Nov. 802 625 4 305  Harris County  J-60-52-801 G.W. Strake 1939 902 4 1/2 Ev 140 40 58-501 Hegar Brothers, well 2 1947 1,160 24 JU 244 107 Oct. 59-204 Doyle 1966 235 4 - 2 Ev 232 87.3 Dec. 303 Houston Lighting and Power 1965 340 4 Ev 182 57 Sept.	W-60-18-701 Atlantic Pipeline Co.	W-60-18-701 Atlantic Pipeline Co. 1928 160 4 JU 380 J, G, 2 26-205 W.F. Lucas 1924 32 24 JU 398 25.7 Dec. 16, 1942 B, H 701 L.W. Keisler 1959 720 4 - 2 JU 319 96.9 Jan. 6, 1966 8, E, 3 702 T.J. Haynie 1939 192 4 JU 300 18 1941 P, E, 3/4 703 S.B. McKinney 1922 450 4 JU 300 18 1941 P, E, 3/4 704 Magnolia Pipeline Co. 1939 160 4 JU 272 5.6 Dec. 16, 1942 N 705 C.A. Hamilton 65 8 Ev 332 48.5 Dec. 4, 1942 B, H 34-101 S.B. Barrett Estate 1902 21 36 Ev 305 10.9 Dec. 3, 1942 B, H 801 John Rosilier 1927 54 24 Ev 276 49.4 Dec. 2, 1942 B, H 42-101 Walter Greenwood 1939 200 4 Ev 335 75 Nov. 1942 P, E, 1 103 Frank Phillips 1928 151 4 Ev 315 P, W 502 Searcy Smith 33 30 C 275 26.2 Nov. 27, 1942 B, H 702 George Largent 1939 130 3 Ev 292 P, H 801 R.L. McGraw 1939 35 36 C 290 28.3 Nov. 27, 1942 P, H 802 652 4 305 P, H 805 Mr. Schweinle 1939 902 4 1/2 Ev 160 40 40 1950 J, E 58-501 Megar Brothers, well 2 1947 1,160 24 JU 244 107 Oct. 23, 1963 T, G 59-204 Doyle 1966 235 4 - 2 Ev 232 87.3 Dec. 21, 1966 5, E, 3/4 503 The Texas Co. 1953 5,766 10 206 60-103 City of Tomball, well 3 1957 412 16 Ev 180 64 1958 T, E, 20	Second   Atlantic Pipeline Co.   1928   160   4   JU   380       J,G, 2   Ind   26-205   W.F. Lucas   1924   32   24   JU   398   25.7   Dec. 16, 1942   B,H   D   D   T.J. Kaynie   1939   192   4   JU   320   50   1939   P,E, 1/3   D   T.J. Kaynie   1939   192   4   JU   320   50   1939   P,E, 1/3   D   T.J. Kaynie   1922   450   4   JU   320   50   1939   P,E, 1/3   D   T.J. Kaynie   1922   450   4   JU   300   18   1941   P,E, 3/4   D   T.J. Kaynie   1922   180   3   JU   292   5.6   Dec. 16, 1942   N   U   T.J. Kaynie   1922   180   3   JU   289   45.8   do   N   U   T.J. Kaynie   1922   180   3   JU   289   45.8   do   N   U   T.J. Kaynie   1922   180   3   JU   289   45.8   do   N   U   T.J. Kaynie   1922   180   3   JU   289   45.8   do   N   U   T.J. Kaynie   1922   180   3   JU   289   45.8   do   N   U   T.J. Kaynie   1922   180   3   JU   289   45.8   do   N   U   T.J. Kaynie   1922   180   3   JU   289   45.8   do   N   U   T.J. Kaynie   1922   180   3   JU   289   45.8   do   N   U   T.J. Kaynie   1922   180   3   JU   289   45.8   do   N   U   T.J. Kaynie   1922   180   3   JU   289   45.8   do   N   U   T.J. Kaynie   1922   180   3   JU   289   45.8   do   N   U   T.J. Kaynie   1922   180   46   Ev   335   T.J. Kaynie   1942   B,H   D   D   T.J. Kaynie   1924   T.J. Ka

Table 7. -- Records of Wells in Montgomery and Adjacent Counties -- Continued

				CASING	1	1	WATER L	EVEL			
WELL	OWNER	DATE COM- PLET- ED	DEPTH OF WELL (FT)	DIAM- ETER (IN)	WATER- BEAR- ING UNITS	ALTITUDE OF LAND SURFACE (FT)	ABOVE (+) OR BELOW LAND SURFACE DATUM (FT)	DATE OF MEASUREMENT	METHOD OF LIFT	USE OF WATER	REMARKS
LJ-60-60-108	Service Pipeline Co.	1962	106	4	Ev	169	43.4	Oct. 28, 1963	J,E, 1	Ind	Reported yield 2 gpm.
109	Hufsmith Elementary School		700	4	Ev	174	47.7	Dec. 21, 1966	S,E	P	
110			150	4	Ev	165	36.7	do	S,E	D	
301	Edwin Theiss	1964	108	4	Ev	143	40	Apr. 22, 1964	s,E, 3/4	D	Screened from 102-108 ft.
61-204	The break of the second second		60	36	C	104	7.3	Aug. 29, 1966	в,н	U	
* 502	C. Wunsche High School	1939	365	4	Ev	124	18 63.4	1939 Aug. 29, 1966	N	U	
* 504	I. and G.N. R.R.	1912?	1,072	8	Ev	122	+ 95.4	1931 Feb. 14, 1967	N	U	3/
601	Bayer Lumber Co.		225	4	Ev	119	53.4	Aug. 29, 1966	S,E	Ind	
602	Eltex	1944	6,249			121					Oil test. 2/
62-801	Curtis Potts	1963	132	2	Ev	92	65	1963	J,E, 1	D	Reported yield 7 gpm. Reported drawdown 10 ft. Screened from 126-132 ft.
63-501	O.C. Garvey	1942	9,511			54					Oil test. 2/
63-601	Champion Rod and Gun Club		210	2	Ev	48	20	1966	J,E	P	Screened from 200-210 ft.
705	Forest Cove Country Club	1964	460	12 - 6	Ev	82	68.3	Sept. 15, 1964	T,E	Irr	Reported yield 630 gpm. Reported drawdown 30 ft. Screened from 245-295 ft; 340-351 ft; and 362-451 ft.
706	do	1964	889	12	Ev	86	80	Oct. 1964	T,E,40	P	Reported yield 554 gpm. Reported drawdown 40 ft. Screened from 743-795 ft and 823-875 ft.
* 65-06-305	T.W. Horn, well 1	1916	860	6	Ev	85	+	Apr. 1967	Flows	Ind	a keeping galled Street, 43
a la		100000			Liberty C	ounty					
* SB-60-48-101	City of Cleveland, well 3	1959	1,337	14	JU	160	22	June 1951	T,E,20	P	Reported yield 448 gpm. Reported drawdown 82 ft. Screened from 1119-1139 ft; 1170-1185 ft; 1205-1210 ft; 1280-1300 ft; and 1310-1330 ft. 1/2
* 102	City of Cleveland, well 1	1938	845	13 3/8	Ev	157	14.7	Jan. 26, 1945	т,Е,15	P	Reported yield 400 gpm. Screened from 619-640 ft; 753-774 ft; and 795-833 ft. <u>1</u> /
* 103	City of Cleveland, well 2	1938	833	13 3/8	Ev	157	16.9	do	т,Е,20	P	Reported yield 350 gpm. Reported drawdown 78 ft. Original depth 929 ft. Screened from 614-637 ft; 752-771 ft; and 793-833 ft. 1/2

Table 7. -- Records of Wells in Montgomery and Adjacent Counties -- Continued

ſ					CASING			WATER L	EVEL			
	WELL	OWNER	DATE COM- PLET- ED	DEPTH OF WELL (FT)	DIAM- ETER (IN)	WATER - BEAR - ING UNITS	ALTITUDE OF LAND SURFACE (FT)	ABOVE (+) OR BELOW LAND SURFACE DATUM (FT)	DATE OF MEASUREMENT	METHOD OF LIFT	USE OF WATER	REMARKS
	SB-60-48-202	City of Cleveland, well 4	1965	1,610	12 3/4 - 6 5/8	JU	158	+ 17	Jan. 1966	T,E	P	Screened from 1560-1610 ft. 2/
	401	Clarkson-Mechim	1920	327	8	Ev	110	+	Apr. 1945	101	υ	Destroyed. Flowed 10 gpm on April 6, 1945.
	402	Grogan Mfg. Co.	1910	187	4	Ev	115	+ 7	Feb. 1945		U	Destroyed. Estimated flow of 10 gpm on April 6, 1945.
	k 404	W.E. Henry	1944	18	1 1/4	С	130	10	Apr. 1945		υ	Destroyed. on Dec. 13, 1965.
	405	do	1963	25	2	С	130	10	1965	P,E	D	Screened from 20-25 ft.
	702	Williams Lumber Co.	1961	1,395		JU	125	+	Jan. 1966	J,E	Ind	Screened from 1354-1394 ft.
	56 <b>-</b> 101	H.J. Boucher	1964	325	4	Ev	110	50.4	May 1966	S,E, 1 1/2	P	Screened from 315-325 ft.

## San Jacinto County

WU-60-30	701	Hardy Browder	1960	65	6	С	432	43.3	Sept. 28, 1965	J,E, 1/2	D	Screened from 55-65 ft.
*	702	J.W. Browder	1963	56	4	С	412	34.1	Sept. 29, 1965	J,E, 1/2	D	Screened from 48-56 ft.
	703	F.S. Browder	1953	844	2	JU	428	160	Aug. 1960	N.	U	Destroyed in 1960.
	705	F.C. Hill	1955	441	3	JU	417	168	May 1955	P,E	υ	Screened from 429-441 ft.
*	810	F.H. Elmore	1965	429	4	JU	388	171.2	Mar. 31, 1966	S,E	D	Screened from 423-429 ft.
38	3 <b>-</b> 502	J.E. Murphy	1965	83	8	С	302	51.5	Oct. 15, 1965	J,E, 1/2	D	
*	901	O.L. Hale	1966	83	4	С	268	62.8	Mar. 31, 1966	J,E, 1/3	D	Screened from 77-83 ft.
39	9-801	Foster Lumber Co.	1965	125	4	Ev	207	41.8	Oct. 30, 1965	N	υ	Plugged from 140 ft. Screened from 99-120 ft.
*† 47	7-302	Ray M. Arnold	1962	190	2	Ev	180			J,E, 1/2	D	Screened from 180-190 ft.
	305	Lawrence Enloe	1954	161	2	Ev	157	26.1	Jan. 26, 1965	N	U	Screened from 151-161 ft.
	402	L.E. McWhorters	1950	102	3	Ev	171	31.4	Oct. 14, 1965	J,E	D	Screened from 87-102 ft.
*	403	R.A. Boyd		120	2	Ev	171	2_ 1		J,E, 1	D	

## Walker County

YU-60-26-201	Weldon Hope		54	6	JU	328	48.8	July 29, 1948	В,Н	D	
* 27-601	U.S. Forest Service	1940	120	4	JU	213	+ 30	Dec. 1966	N	Ind	Reported yield 30 gpm.
* 28-401	Gus Randall	1947	30	6	Ev	243	9.5	June 13, 1966	в,н	D	
701	U.S. Forest Service	1964	70	4	Ev	246	65.8	Jan. 18, 1967	N	U	
* 702	N.T. Little	1947	185	2	Ev	201	+ 40	1947	N		Reported yield 62 gpm. Screened from 173-185 ft.

Table 7.--Records of Wells in Montgomery and Adjacent Counties--Continued

				CASING			WATER L	EVEL			
WELL	OWNER	DATE COM- PLET- ED	DEPTH OF WELL (FT)	DIAM- ETER (IN)	WATER- BEAR- ING UNITS	ALTITUDE OF LAND SURFACE (FT)	ABOVE (+) OR BELOW LAND SURFACE DATUM (FT)	DATE OF MEASUREMENT	METHOD OF LIFT	USE OF WATER	REMARKS
+ YU-60-29-702	Lige Buckner	1950	111	4	Ev	290	12	1950	s,E, 3/4	D	Screened from 101-111 ft.
703	Mobil Gas Station		85	36	Ev	352	73.6	Jan. 13, 1967	J,E, 1	D	
704	New Waverly, well 1	1963	791		JU	361	130	Sept. 1963	S,E		Screened from 575-615 ft. Reported yield 201 gpm. Reported drawdown 38 ft. 2/
* 705	R.H. Hardy	1947	190	6 - 4	Ev	349	65.0	May 7, 1948	J,E, 3/4	D	Screened from 180-190 ft.
* 803	Fred Nelson	1944	180	3	Ev	296			J,E, 1	D	Screened from 174-180 ft.
* 902	W.G. Ellisnor	7	30		С	440	19.3	June 7, 1948	P,W	D	

#### Waller County

*	YW-60-50-202	A.C. Rickett	1966	236	4	Ev	283	46.5	Dec. 15, 1966	S,E, 2	D	Screened 230-236 ft.
	203	do	1966	76	4	Ev	280	35.1	do	P,W	D	
*	703	L.A. Hoover	1963	94	4	Ev	248	56.7	Feb. 3, 1966	S,E	D	Screened 88-94 ft.
	801	Lakeview Club	1958	720	6	Ev	235	104.3	Feb. 2, 1966	S,E,15	P	Reported yield 300 gpm. Screened from 475-535 ft, and 620-660 ft.
*	58-105	Tennwood Club, well 1	1955	715	10	Ev	256	134.5	do	т,Е,25	P	Reported yield 268 gpm.
	106	R. Robertson		196	8	Ev	243	73.3	Feb. 3, 1966	S,E,40	Irr	Reported yield 143 gpm. Slotted steel from 0-196 ft.
	201	Cameron Iron Works	1955	400	6	Ev	258	89.2	do	T,E,15	P	Reported yield 100 gpm. 3/
*	203	M. Hart	1946	300	4	Ev	261	72	1946	т,Е, 3	D	

<sup>\*</sup> See Table 10 for chemical analyses of water from wells.
† See Table 11 for field analyses of water from wells.
½ See Table 8 for drillers' logs of wells.
½ Electric logs in files of Texas Water Development Board or U.S. Geological Survey offices, Austin, Texas.
¾ See Table 9 for water levels in wells.

# Table 8.—Drillers' Logs of Wells in Montgomery and Adjacent Counties

	THICKNESS (FEET)	DEPTH (FEET)		THICKNESS (FEET)	DEPTH (FEET)
Montgomery Co	unty		Sand, medium, white and black	37	401
Well TS-60-29-	802		Shale	1	402
Owner: Mrs. Me	errill		Wall To co 2	4 604	
Driller: Con-Tex Water	er Well Co.		Well TS-60-3		
Sand and red clay	12	12	Owner: Robert Driller: Tomball D		
Sand, brown	12	24	Soil	8	8
Clay with gravel	129	153	Shale, red	7	15
Sand, white	30	183	Sand	6	21
Well TS-60-34-	502		Shale, blue	5	26
Owner: Texas Forest F			Sand	12	38
Driller: Layne-Te			Shale	29	67
Clay	5	5	Sand, salt and pepper	22	89
Sand, soft	39	44			
Clay, brown	24	68	Well TS-60-3		
Clay, sandy	8	76	Owner: G Driller: Con-Tex Wa		
Sand, fine and clay, broken	8	84	Clay	31	31
Shale, tough, brown and blue	27	111	Sand	19	50
Sand, fine, white	23	134	Sand and clay	4	54
Shale, sandy	6	140	Sand	19	73
Shale, soft, sandy	22	162			
Shale, tough, brown, and blue	25	187	Well TS-60-3		
Sand, hard, fine, and shale with lime streaks	31	218	Owner: J. A. Driller: Con-Tex Wa		
Shale	3	221	Clay, red and sand	20	20
	4	225	Clay and iron ore	32	52
Shale, sandy, and lime Shale, sandy	4	229	Sand and sandy shale	4	56
Shale, tough	7	236	Sand, white	20	76
Shale, sandy	15	251	Shale and lime streaks	28	104
Shale, tough	12	263	Sand, gray and black	22	126
Shale, sand with hard lime streaks	28	291	Sand, shale, and lime	6	132
Rock	1	292			
Sand and shale, broken	12	304	Well TS-60-3		
Sand and shale, streaks	14	318	Owner: City of M Driller: Falke		
Sand and shale, broken	6	324	Clay and rock	70	70
Sand, fine, white and black	11	335	Sand	10	80
Shale	2	337	No record	5	85
Sand, medium, white and black	9	346	Sand	20	105
Rock	1	347	Clay	90	195
Shale, sandy	17	364	Sand, fine	25	220

Table 8.—Drillers' Logs of Wells in Montgomery and Adjacent Counties—Continued

	THICKNESS (FEET)	DEPTH (FEET)		THICKNESS (FEET)	DEPTH (FEET)
Well TS-60-35-80	2—Continued		Shale and boulders	42	512
Clay and rock	235	455	Shale, sticky	108	620
Clay	65	520	Shale, sandy	130	750
Sand	70	590	Sand, artesian flow	24	774
- 40			Shale	46	820
Well TS-60-	36-201		Shale, sticky	130	950
Owner: Bona Driller: Con-Tex V			Sand, water	22	972
Clay	18	18	Shale and boulders	52	1,024
Sand with clay	12	30	Shale, sticky	76	1,100
Sand	44	74	Sand	12	1,112
Clay with sand	11	85	Shale, sticky	18	1,130
Sand	20	105	Shale	44	1,174
Sand, hard	1	106	Sand and boulders	47	1,221
Clay and gravel	13	119	Shale	89	1,310
Sand	34	153	Shale, sticky	90	1,400
Clay and lime	85	238	Sand, artesian flow	24	1,424
Sand	17	255	Shale	36	1,460
Shale and lime	29	284	Total depth		4,316
Sand, hard with clay streaks	90	374			
Sand with shale streaks	25	399	Well TS-60-36	-601	
Shale	33	432	Owner: Hulan Lakes Driller: Con-Tex Wat		
Sand	38	470	Clay, red	67	67
Sand and shale	3	473	Shale, sandy and sand, hard streaks	29	96
			Sand, hard	2	98
Well TS-60-36-40	1, partial log		Sandstone	1	99
Owner: Luth Driller: Sprage			Sand, hard streaks	6	105
Soil	8	8	Shale and lime	39	144
Sand	40	48	Shale, sand and lime	14	158
Shale	12	60	Lime, hard sandy	2	160
Shale, sandy	25	85	Shale and lime	34	194
Shale, sticky	100	185	Shale, sandy	18	212
Shale and boulders	65	250	Sand	23	235
Shale, sticky	60	310	Shale	3	238
Sand, artesian flow	20	330	Shale, sandy	11	249
Shale, sticky	30	360	Sand	29	278
Sand, hard	24	384	Shale and sand streaks	9	287
Shale, sticky	64	448	Shale and lime	6	293
Sand, artesian flow	22	470	Sand	37	330

Table 8.—Drillers' Logs of Wells in Montgomery and Adjacent Counties—Continued

	THICKNESS (FEET)	DEPTH (FEET)		THICKNESS (FEET)	DEPTH (FEET)	
Well TS-60-36-601-0	Continued		Clay and gravel	44	69	
Sand and shale	16	346	Sand, hard and clay	11	80	
Sand	38	384	Shale	24	104	
Sand, hard streaks, and shale	45	429	Shale with lime	67	171	
Sand	32	461	Sand	36	207	
Well TS-60-37				60-37-304		
Owner: Ray F. V Driller: Con-Tex Wat			Owner: Afton Park Subdivision Driller: Kerns Water Wells			
Clay and ore	12	12	Clay	14	14	
Sand and red clay	27	39	Sand	17	31	
Clay and gravel streaks	24	63	Clay	7	38	
Sand, hard and red clay	11	74	Sand	1	39	
Sand, hard streaks	10	84	Clay	12	51	
Clay and sand	4	88	Sand, red	17	68	
Sand, gray and black	9	97	Clay	38	106	
Clay and sand streaks	8	105	Sand with hard streaks	11	117	
Sand, brown	6	111	Clay, sand	9	126	
Clay	23	134	Sand	8	134	
Shale and hard sandy lime	16	150	Clay and rock	93	227	
Shale and lime	27	177	Sand and rock	11	238	
Sand, firm	32	209	Sand	18	256	
Shale and lime	8	217	Clay and rock	38	294	
Sand	36	253	Rock and sand	8	302	
Well TS-60-37	-105		Sand	60	362	
Owner: Robert H			Well TS-	60-37-401		
Driller: Con-Tex Wa			Owner: City of Willis, Well 1			
Clay	16	16	Driller: Lay	ne-Texas Co.		
Sand, hard	6	22	Clay, sandy	25	25	
Clay with sand streaks	41	63	Gravel	15	40	
Sand, hard and sandy lime	33	96	Clay	10	50	
Clay with lime	16	112	Sand	30	80	
Clay	5	117	Clay	50	130	
Sand and shale	29	146	Clay, sandy	11	141	
Sand	37	183	Clay	27	168	
Well TS-60-37	-202		Clay with hard streaks	76	244	
Owner: S. No			Sand, hard	10	254	
Driller: Con-Tex Wa			Shale	22	276	
Clay and gravel	8	8	Sand, hard fine	21	297	
Sand	17	25	Shale Shale	23	320	

Table 8.—Drillers' Logs of Wells in Montgomery and Adjacent Counties—Continued

	THICKNESS (FEET)	DEPTH (FEET)		THICKNESS (FEET)	DEPTH (FEET)
Well TS-60-37-401-	Continued		Sand and lime streaks	38	178
Sand, hard	13	333	Clay and lime streaks	104	282
Sand, fine	28	361	Lime, sandy	8	290
Shale	4	365	Clay and sand	28	318
			Sand with clay streaks	22	340
Well TS-60-37	-403		Lime, hard	1	341
Owner: City of Will Driller: Layne-Te			Sand, hard and soft	14	355
Clay	10	10	Well TS-60-	37-406	
Sand	50	60	Owner: R, B,		
Clay, sandy	205	265	Driller: Con-Tex \		
Clay, sandy and sand streaks	19	284	Clay	54	54
Clay	28	312	Sand	28	82
Sand	39	351	Clay	12	94
Clay, sandy	53	404	Sand	11	105
Sand and clay streaks	46	450	Clay	5	110
Clay	20	470	Sand	10	120
Sandrock	3	473	Hard streaks	1	121
Sand	8	481	Sand	9	130
Clay	10	491	Clay	2	132
Sand and shale streaks	38	529	W.H. TO 00	07.704	
Shale	71	600	Well TS-60-		
Sand	10	610	Owner: W. L Driller: Kerns V		
Shale, sandy	63	673	Clay and rock	116	116
Sand streaks and shale	17	690	Rock	2	118
Sand	20	710	Broken formation of		
Shale	37	747	shale, sand, rock	24	142
Sand	19	766	Sand, hard, brown, fine	8	150
Shale, sandy	34	800	Shale	70	220
Sand	57	857	Formation, hard	20	240
Shale, sandy	10	867		13	253
Sand	13	880	Sand, soft, brown	27	280
Shale, sandy	33	913	Well TS-60	-37-703	
Well TS-60-37-405			Owner: Camp Agnes Arnold Driller: Layne		rica)
Owner: H. E. H			Soil	3	3
Driller: Con-Tex Wat		ne one	Clay, red sandy	3	6
Sand and gravel	30	30	Sand and gravel	26	32
Clay with sand streaks	40	70	Gravel and clay	10	42
Clay	70	140	Clay	236	278

Table 8.—Drillers' Logs of Wells in Montgomery and Adjacent Counties—Continued

	THICKNESS (FEET)	DEPTH (FEET)		THICKNESS (FEET)	DEPTH (FEET)
Well TS-60-37-703-	-Continued		Sand	4	119
Sand and boulders	11	289	Clay	44	163
Clay	111	400	Sand, hard streaks	5	168
Clay, sandy	3	403	Sand	13	181
Sand, fine	20	423	Hard streaks	1	182
Clay	39	462	Sand	39	221
Clay, sandy	11	473	Clay	1	222
Clay	25	498			
Sand, fine	17	515		60-37-904	
Clay	5	520		S. C. Boone ex Water Well Co.	
Sand	2	522	Sand and red clay	24	24
Clay	20	542	Sand and red gravel	12	36
Clay, sticky	44	586	Clay	3	39
Clay, sandy	24	610	Sand and clay	3	42
Clay, sticky	109	719	Sand	33	75
Clay	16	735			
Sand	8	743		60-42-202	
Clay, sticky	20	763		and James Herzog oall Drilling Co.	
Clay, sandy	25	788	Soil	2	2
Clay, sticky	37	825	Shale	26	28
Clay and hard sandy layers	9	834	Sand	13	41
Sand and clay layers	49	883	Shale	17	58
Sand	30	913	Sand	46	104
Sand and boulders	5	918	Shale	6	110
Clay	13	931	Sand	9	119
MAN TE CO 2	7 000		Shale	19	138
Well TS-60-37			Sand	28	166
Owner: Carl C Driller: Con-Tex Wa			Well TS.	60-42-307	
Clay	21	21		orado and S.F. R.R.	
Sand and gravel	24	45		W. J. Giles	
Clay with sand and gravel streaks	12	57	Clay, yellow	12	12
Clay	27	84	Sand, shale and gravel	10	22
Sand, hard and clay streaks	10	94	Rock, white lime	2	24
Sand, trashy	7	101	Clay, brown	4	28
Clay	2	103	Rock, white lime	2	30
Sand, hard streaks	1	104	Clay, brown	2	32
Sand	4	108	Rock, white lime	3	35
Clay	7	115	Clay, brown and white	20	55

Table 8.—Drillers' Logs of Wells in Montgomery and Adjacent Counties—Continued

	THICKNESS (FEET)	DEPTH (FEET)		THICKNESS (FEET)	DEPTH (FEET)
Well TS-60-42-307-C	ontinued		Well TS-60-42-	501	
Rock, white lime	3	58	Owner: A. C. Co		
Clay, gray	40	98	Driller: Con-Tex Water		All varia
Sand, brown	16	114	Sand and clay, red	40	40
Gumbo, gray	51	165	Clay, red	4	44
Rock, white lime	3	168	Sand, brown	14	58
Clay, gray	20	188	Clay, brown	13	71
Gumbo, gray	12	200	Clay and lime	26	97
Shale, red	12	212	Lime, hard	3	100
Gumbo, brown	34	246	Sand with clay	8	108
Sand, blue	31	277	Clay with hard lime streaks	82	190
Shale, hard blue	13	290	Clay, white sandy	24	214
Rock, white lime	21	311	Sand	33	247
Sand, blue	23	334	Well TS-60-42-	901	
Rock, white lime	6	340	Owner: Toby S	mith	
Sand, blue and shale	34	374	Driller: Carl Re		
Gumbo, blue	23	397	Clay, yellowish	40	40
Shale, blue and sand	14	411	Clay, white	40	80
Rock, white lime	8	419	Sand	18	98
Sand, blue and shale	25	444	Well TS-60-43-	102	
Shale, hard blue	33	477	Owner: J. R. L		
Gumbo, blue	28	505	Driller: Con-Tex Water		
Rock, white lime	2	507	Clay, lime streaks	113	113
Gumbo, blue	13	520	Sand	7	120
Water sand	40	560	Clay, lime streaks	3	123
			Sand	8	131
Gumbo, brown	26 2	586 588	Clay	2	133
Rock, white lime	4	592	Sand, hard streaks	9	142
Sand, fine-grained, blue	1	593	Sand	20	162
Rock, white lime Shale, gray	19	612	Well TS-60-43-	201	
Sand, white	4	616	Owner: Keith Di		
Rock, sand	3	619	Driller: Layne-Te		
Sand, hard	14	633	Sand, gravel and clay	35	35
Sand and shale	22	655	Clay	30	65
Rock, sand	2	657	Clay and boulders	94	159
Sand	35	692	Sand, hard	29	188
Rock, sand	3	695	Clay with sandy clay layers	63	251
Sand	51	746	Clay	22	273
\$ 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	31	200 3/40	Clay, sandy	14	287

# Table 8.—Drillers' Logs of Wells in Montgomery and Adjacent Counties—Continued

Well TS-60-43-201—Continued       Sand, hard streaks       14       113         Sand       8       295       Clay and lime       57       170         Clay       15       310       Sand       26       196         Shale, sandy       15       325       Clay and lime       51       247         Rock       1       326       Sand       22       269         Shale       55       381       Well TS-60-43-302         Shale, sandy       22       403       Owner: Paul Hoffart Driller: Con-Tex Water Well Co.         Clay and boulders       18       498       Clay, gravel and ore       65       65         Shale, sandy       13       511       Lime and shale       13       78         Shale       29       540       Sand streaks and shale       29       107         Shale, sandy       10       550       Shale       38       145
Clay       15       310       Sand       26       196         Shale, sandy       15       325       Clay and lime       51       247         Rock       1       326       Sand       22       269         Shale       55       381       Well TS-60-43-302         Shale, sandy       22       403       Owner: Paul Hoffart         Shale       77       480       Driller: Con-Tex Water Well Co.         Clay and boulders       18       498       Clay, gravel and ore       65       65         Shale, sandy       13       511       Lime and shale       13       78         Shale       29       540       Sand streaks and shale       29       107
Shale, sandy       15       325       Clay and lime       51       247         Rock       1       326       Sand       22       269         Shale       55       381       Well TS-60-43-302         Shale, sandy       22       403       Owner: Paul Hoffart Driller: Con-Tex Water Well Co.         Clay and boulders       18       498       Clay, gravel and ore       65       65         Shale, sandy       13       511       Lime and shale       13       78         Shale       29       540       Sand streaks and shale       29       107
Rock       1       326       Sand       22       269         Shale       55       381       Well TS-60-43-302         Shale, sandy       22       403       Owner: Paul Hoffart Driller: Con-Tex Water Well Co.         Clay and boulders       18       498       Clay, gravel and ore       65       65         Shale, sandy       13       511       Lime and shale       13       78         Shale       29       540       Sand streaks and shale       29       107
Shale       55       381       Well TS-60-43-302         Shale, sandy       22       403       Owner: Paul Hoffart         Shale       77       480       Driller: Con-Tex Water Well Co.         Clay and boulders       18       498       Clay, gravel and ore       65       65         Shale, sandy       13       511       Lime and shale       13       78         Shale       29       540       Sand streaks and shale       29       107
Well TS-60-43-302         Shale, sandy       22       403       Owner: Paul Hoffart         Shale       77       480       Driller: Con-Tex Water Well Co.         Clay and boulders       18       498       Clay, gravel and ore       65       65         Shale, sandy       13       511       Lime and shale       13       78         Shale       29       540       Sand streaks and shale       29       107
Shale, sandy         22         403         Owner: Paul Hoffart           Shale         77         480         Driller: Con-Tex Water Well Co.           Clay and boulders         18         498         Clay, gravel and ore         65         65           Shale, sandy         13         511         Lime and shale         13         78           Shale         29         540         Sand streaks and shale         29         107
Shale         77         480         Driller: Con-Tex Water Well Co.           Clay and boulders         18         498         Clay, gravel and ore         65         65           Shale, sandy         13         511         Lime and shale         13         78           Shale         29         540         Sand streaks and shale         29         107
Shale, sandy         13         511         Lime and shale         13         78           Shale         29         540         Sand streaks and shale         29         107
Shale 29 540 Sand streaks and shale 29 107
Shale, sandy         10         550         Shale         38         145
Shale         105         655         Sand         3         148
Sand 22 677 Shale, sand streaks 97 245
Shale, sandy         5         682         Sand         12         257
Shale 17 274 Well TS-60-43-203
Sand 5 279 Owner: A. B. Hamil
Driller: Kerns Water Wells Shale 2 281
Clay and sand         45         45         Sand         7         288
Sand 15 60 Shale 4 292
Clay 30 90 Sand 46 338
Hard formation 2 92 Well TS-60-43-502
Shale and hard lime 128 220 Owner: J. H. Kurth, Jr.
Sand 3 223 Driller: Falkenburg
Shale and lime 4 227 Clay 32 32
Sand 5 232 Sand 5 37
Lime, hard and shale 48 280 Clay and rock 284 321
Shale, hard and lime 6 286 Sand 43 364
Sand 7 293 Well TS-60-43-601
Shale 21 314 Owner: James L. Slowey  Send and lime 9 323 Driller: Con-Tex Water Well Co.
Sand and mine
Shale and lime 67 404 Well TS-60-43-702
Well TS-60-43-301 Owner: John Waters Driller: Con-Tex Water Well Co.
Owner: W. S. Taliver Driller: Con-Tex Water Well Co. Sand 7 7
Sand and clay 78 78 Sand and gravel, red 40 47
Clay 21 99 Sand, red 25 72

Table 8.—Drillers' Logs of Wells in Montgomery and Adjacent Counties—Continued

	THICKNESS (FEET)	DEPTH (FEET)		THICKNESS (FEET)	DEPTH (FEET)
Well TS-60-43-702-	Continued		Well TS-60-4	4-204	
Clay and gravel streaks	9	81	Owner: Mrs. Lil		
Clay and sand streaks	25	106	Driller: Kerns W	ater Wells	
Clay	14	120	Clay	58	58
Clay and gravel	14	134	Sand, fine brown	40	98
Sand	14	148	Hard formation	11	109
Clay	18	166	Well TS-60-4	4-302	
Sand	19	185	Owner: G. A.		
Shale	3	188	Driller: Con-Tex Wa	ater Well Co.	
			Sand and clay, red	14	14
Well TS-60-43	3-703		Clay, brown and gray	59	73
Owner: J. Ne Driller: Con-Tex Wa			Clay and gravel streaks, gray	8	81
Clay, red	14	14	Clay and lime	28	109
Sand, red	10	24	Lime, hard sand and clay streaks	11	120
Clay	2	26	Clay and lime	35	155
Sand, white	17	43	Clay, sand and lime	6	161
Sand and gravel, white	9	52	Sand	22	183
Clay	2	54	Shale and lime, blue	56	239
Sand, white	25	79	Lime, hard	2	241
			Shale, sandy and lime	16	257
Well TS-60-43	3-901		Sand	12	269
Owner: E. B. He Driller: Con-Tex Wa			Shale	15	284
Sand and clay	36	36	Sand, gray	52	336
Clay, brown	9	45	Clay	11	347
Sand with clay, red	12	57	Sand	26	373
Clay with gravel streaks	76	133	Clay	19	392
Clay with sand streaks	47	180	Sand, blue	30	422
Clay and lime	100	280	Well TS-60-4	14-401	
Clay with sandy lime	88	368	Owner: Charl		
Sand	22	390	Driller: Kerns W		
			Clay, sand and gravel	18	18
Well TS-60-4	4-104		Clay	18	36
Owner: B. J. H Driller: Con-Tex Wa			Sand, brown	20	56
Clay, red	13	13	Clay	42	98
Sand and clay, sand and gravel, red	81	94	Sand, hard brown	26	124
Sandstone, broken and shale	8	102	Clay	29	153
Sand with hard streaks	10	112	Sand, soft	17	170
Shale and lime	98	210	Clay	3	173
Sand, dark gray	17	210	Sand, soft	30	203
Cana, dark gray	1,	227	Clay and rock	4	207

Table 8.—Drillers' Logs of Wells in Montgomery and Adjacent Counties—Continued

	THICKNESS (FEET)	DEPTH (FEET)		THICKNESS (FEET)	DEPTH (FEET)
Well TS-60-4	4-402		Shale, hard	16	290
Owner: Wayne	Broyles		Lime, hard sandy, and shale	16	306
Driller: J. A. V			Lime, hard	13	319
Clay and sand	168	168	Shale and lime	11	330
Clay, yellow	22	190	Sand and shale	68	398
Clay, blue	40	230	Sand	24	
Clay and sand	22	252	Sanu	24	422
Clay, blue	40	292	Well TS-60-44	-702	
Rock	1	293	Owner: H. E. N		
Clay	19	312	Driller: Con-Tex Wat	er Well Co.	
Sand	23	335	Sand and gravel, red	22	22
Clay	40	375	Clay with gravel, brown	86	108
	20	395	Sand, hard streaks	4	112
Clay and sand			Sand	7	119
Clay	83	478	Clay	16	135
Sand	21	499	Sand	25	160
Sand and gravel	89	588			
Clay and boulders	244	832	Well TS-60-44	-801	
Sand	59	891	Owner: Superior Driller: Luther Pa		
Well TS-60-4	4-503		Soil	24	24
Owner: John E.			Sand	21	45
Driller: Con-Tex Wa			Shale	44	89
Clay, red	23	23	Sand	49	138
Sand and gravel	37	60	Shale	2	140
Clay, white	41	101	Shale, sandy	23	163
Clay with sand streaks	44	145			
Sand with hard streaks	17	162	Well TS-60-45	-105	
Sand, brown	22	184	Owner: Panorama Deve Driller: Layne-Te		
Well TS-60-4	4-506		Clay, sandy and clay	5	5
Owner: Charles			Clay, sandy	7	12
Driller: Con-Tex Wa	ater Well Co.		Sand, brown	13	25
Surface sand and clay	45	45	Sand and gravel	25	50
Clay	41	86	Clay	57	107
Sand	46	132	Sand, fine brown		
Sand with hard streaks	13	145		31	138
Sand with clay	34	179	Shale and sandy shale	353	491
Sand, clay and hard lime	16	195	Shale, sandy and streaks of sand	58	549
Clay	12	207	Shale and sandy shale	75	624
Clay with lime	11	218	Sand, broken and streaks of shale	31	655
Shale, hard and lime	56	274	Shale, sandy and streaks of sand	115	770

Table 8.—Drillers' Logs of Wells in Montgomery and Adjacent Counties—Continued

	THICKNESS (FEET)	DEPTH (FEET)		THICKNESS (FEET)	DEPTH (FEET)
Well TS-60-45-105-	-Continued		Well TS-	60-45-402	
Sand, fine	15	785		y of Conroe	
Shale	23	808		y Drilling Co.	
Sand, broken	21	829	Sand and soil	12	12
Shale	3	832	Clay	47	59
Sand	24	856	Sand	60	119
Shale	19	875	Clay	14	133
Sand	15	890	Sand	37	170
Shale, sandy and streaks of sand	10	900	Clay	59	229
Sand	21	921	Sand with rock strips	27	256
Shale, sandy and streaks of sand	29	950	Clay, hard	132	388
Sand and gravel	76	1,026	Sand	20	408
Sand	67	1,093	Clay with sand strips	67	475
Shale	10	1,103	Sand	55	530
		planting of	Clay	41	571
Well TS-60-45	5-201		Sand	50	621
Owner: Montgomery C Driller: Layne-To			Clay	3	624
Sand	4	4	Sand	31	655
Clay	17	21	Clay	30	685
Clay, sandy	22	43	Sand	35	720
Clay	8	51	Clay	77	797
Sand	19	70	Sand	14	811
Clay	3	73	Clay	16	827
Sand	14	87	Sand	21	848
Sand and gravel	17		Clay	35	883
		104	Sand	21	904
Clay, sandy	16	120	Rock	1	905
Clay and boulders	21	141	Sand	1	906
Shale, hard	8	149	Clay	19	925
Rock	1	150	Rock and sand	77	1,002
Shale, hard	54	204	Clay	25	1,027
Shale, sandy	20	224	Sand and limerock	122	1,149
Shale, hard	61	285	Shale, hard	156	1,305
Rock	3	288	Sand, hard and rocky	18	1,323
Shale, hard streaks	248	536	Shale, hard	78	1,401
Shale, sandy	35	571			
Sand	21	592	Well TS-	60-45-407	
Shale, sandy	5	597		ne H. Edwards x Water Well Co.	
Sand and gravel	10	607	Clay and red ore	12	12
Shale	2	609	Clay and red sand	12	24
					Karana da ara

Table 8.-Drillers' Logs of Wells in Montgomery and Adjacent Counties-Continued

	THICKNESS (FEET)	DEPTH (FEET)		THICKNESS (FEET)	DEPTH (FEET)
Well TS-60-45-407-0	Continued		Shale, blue	30	518
Clay, red	41	65	Gumbo	10	528
Sand, red and white	51	116	Shale, blue	20	548
Clay and lime	62	178	Shale, chocolate	18	566
Sand	38	216	Rock	3	569
Clay and lime	86	302	Sand, blue shale and boulders	59	628
Shale, sandy with sand streaks	32	334	Sand and blue shale mixed	41	669
Lime, hard and shale	4	338	Shale, chocolate	20	689
Sand and lime	9	347	Gumbo, soft	20	709
Lime, hard	2	349	Shale, blue	41	750
Shale and lime	70	419	Shale, hard	20	770
Shale with sand streaks	52	471	Rock, soft and chocolate shale	20	790
Shale, hard and lime	8	479	Shale	17	807
Sand	32	511	Rock, soft	3	810
W. II TO CO 4F	400		Gumbo, soft	40	850
Well TS-60-45-408			Gumbo, tough	40	890
Owner: J. S. Hunt and Driller: Layne-Te			Shale	19	909
Sand and clay	22	22	Rock, soft	20	929
Sand, white	38	60	Gumbo and boulders	61	990
Clay, yellow	55	115	Gumbo, tough	20	1,010
Sand	14	129	Gumbo	20	1,030
Clay	15	144	Sand and shale mixed	20	1,050
Sand	19	163	Water sand	41	1,091
Sand and gravel	12	175	Rock, soft and sand	20	1,111
Clay, yellow	58	233	Water sand	41	1,152
Sand	10	243	Sand and gravel	20	1,172
Clay	81	324	Well TS-60-4	<b>5-505</b>	
Shale	14	338	Owner: City of Co		
Clay	7	345	Driller: D. G.		
Rock	1	346	Clay, red	60	60
Clay	20	366	Sand	30	90
Shale, blue and brown	20	386	Clay	15	105
Clay, tough	40	426	Sand	35	140
Shale	21	447	Clay	45	185
Gumbo	10	457	Sand	45	230
Shale, blue	18	475	Clay	75	305
Rock	2	477	Sand	12	317
Gumbo	11	488	Clay	63	380

Table 8.—Drillers' Logs of Wells in Montgomery and Adjacent Counties—Continued

	THICKNESS (FEET)	DEPTH (FEET)		THICKNESS (FEET)	DEPTH (FEET)
Well TS-60-45-505—	Continued		Rock, sand	16	334
Sand	10	390	Gumbo	42	376
Rock, sand	4	394	Rock	2	378
Sand	18	412	Gumbo	85	463
Shale	186	598	Rock	2	465
Rock, hard	14	612	Gumbo and shale	102	567
Sand, fine and blue	28	640	Rock, lime	22	589
Shale, chocolate	80	720	Sand	9	598
Shale, chocolate and			Shale	33	631
scattering rock	170	890	Gumbo	51	682
Rock, hard	6	896	Sand, hard	13	695
Shale	64	960	Shale and gumbo	41	736
Shale, scattering rock	120	1,080	Sand, red	29	765
Rock and sand-bearing water	150	1,230	Gumbo and shale	180	945
Rock, hard	6	1,236	Rock	23	968
Shale, blue	24	1,260	Shale, tough blue and gumbo	18	986
Rock	7	1,267	Gumbo and shale	61	
Shale, chocolate	33	1,300	Rock and sand		1,047
Shale	20	1,320		9	1,056
Shale, blue	20	1,340	Shale, tough	5	1,061
Gumbo, blue	15	1,355	Rock	3	1,064
Rock	25	1,380	Gumbo	23	1,087
Shale, chocolate	32	1,412	Sand, coarse	24	1,111
Rock, soft	8	1,420	Sand and rock	7	1,118
Sand, blue	16	1,436	Shale and gravel	21	1,139
Rock	28	1,464	Sand	7	1,146
			Shale, tough and soft rock	46	1,192
Well TS-60-45			Sand, coarse	22	1,214
Owner: Gulf, Colorado Driller: R. C. D			Rock, sand	29	1,243
Sand and clay	14	14	Sand, coarse	33	1,276
Clay, yellow	44	58	Shale, tough	6	1,282
Sand, coarse	24	82	Well TS-60-4	45-605	
Clay, yellow	99	181	Owner: Jefferson Che	mical Co., Well 6	
Sand, yellow	21	202	Driller: Layne-		
Clay, tough red	33	235	Clay, red	18	18
Rock, sand	6	241	Clay, white	72	90
Gumbo, gray	55	296	Sand	16	106
Rock, sand	7	303	Clay, red	22	128
Gumbo	15	318	Sand	35	163
Combo	15	318	Shale	5	168

Table 8.—Drillers' Logs of Wells in Montgomery and Adjacent Counties—Continued

	THICKNESS (FEET)	DEPTH (FEET)		THICKNESS (FEET)	DEPTH (FEET)
Well TS-60-45	-606		Shale, sandy	12	1,042
Owner: Jefferson Chemi	ical Co., Well 4		Sand	42	1,084
Driller: Layne-Te	exas Co.		Shale and sandy shale	18	1,102
Clay	85	85	Shale, sandy	10	1,112
Sand, yellow and gravel	25	110	Sand, fine	8	1,120
Shale	5	115	Shale and sandy shale	46	1,166
Sand, white	52	167	Sand, broken	12	1,178
Sand, fine	30	197	Shale, sandy and sand streaks	36	1,214
Shale	9	206		21	
Shale and sandy shale	15	221	Shale, sandy Shale		1,235
Shale	81	302		26	1,261
Shale, sandy	21	323	Shale, sandy and sand streaks	40	1,301
Shale	37	360	Sand	24	1,325
Sand, fine and hard streaks	18	378	Shale, sandy	12	1,337
Shale	118	496	Shale	16	1,353
Sand, fine	10	506	Well TS-60-45	5-607	
Shale, sandy and streaks of shale	24	530	Owner: Jefferson Chem		
Shale	48	578	Driller: Layne-To		
Sand, fine	37	615	Soil	3	3
Shale	42	657	Clay	62	65
Sand, fine	24	681	Clay, sandy and streaks of sand	13	78
Rock	2	683	Sand	27	105
Sand and lignite	10	693	Clay	20	125
Shale	38	731	Sand and streaks of clay	42	167
Shale and sandy shale	24	755	Clay, sandy	5	172
Sand	5	760	Well TS-60-45	5-608	
Shale, sandy	14	774	Owner: Columbia Carb		
	9	783	Driller: Layne-To		
Sand, fine and shale streaks			FIII	2	2
Sand and layers of rock	14	797	Clay, soft	12	14
Shale and sandy shale	12	809	Clay, white	18	32
Shale and sticky shale	76	885	Clay and breaks of sandy clay	30	62
Rock and hard sand streaks	7	892	Sand, coarse and gravel	43	105
Sand	12	904	Clay and streaks of coarse sand	29	134
Rock	2	906	Clay, hard	17	151
Shale	34	940	Clay and streaks of sand	90	241
Shale, sandy	7	947	Clay and few boulders	103	344
Sand	26	973	Clay and boulders	77	421
Shale	13	986	Shale, streaks of sand,		
Sand, fine and layers of sandy shale	44	1,030	and boulders	121	542

Table 8.—Drillers' Logs of Wells in Montgomery and Adjacent Counties—Continued

	THICKNESS (FEET)	DEPTH (FEET)		THICKNESS (FEET)	DEPTH (FEET)
Well TS-60-45-608-	·Continued		Sand, good	23	630
Rock, sand	2	544	Shale, sandy	5	635
Shale	14	558	Sand, broken and shaley	8	643
Shale and sandy shale	18	576	Well TS-60-45	205	
Shale, sandy shale, and			Owner: Walter M.	Section 1981	
sand breaks	38	614	Driller: Layne-Te		
Shale, hard	165	779	Clay, sandy	3	3
Sand	3	782	Sand and gravel	20	23
Sand and shale	8	790	Clay	21	44
Shale and sandy shale	76	866	Sand	21	65
Shale and rock layers	5	871	Clay	23	88
Rock	3	874	Clay, sandy	6	94
Sand, fine	24	898	Sand	50	144
Shale and sandy shale	24	922	Clay	5	149
Sand and shale streaks	15	937	Sand		
Shale	31	968		4	153
Sand	7	975	Clay	11	164
Boulders	4	979	Sand and clay layers	31	195
Shale, sand and breaks of fine sand	11	990	Clay	16	211
Shale, hard	21	1,011	Sand	4	215
Sand, fine green	61	1,072	Clay	29	244
Sand, fine and breaks of shale	19	1,091	Hard streaks	2	246
Shale and breaks of sandy shale	19	1,110	Sand	4	250
			Clay	71	321
Shale and sand breaks	5	1,115	Clay and hard layers	5	326
Well TS-60-45	i-703		Sand	14	340
Owner: Camp Martha F. Madeley		nerica)	Clay and sand	4	344
Driller: Lowry Wate			Clay, sand and hard layers	18	362
Clay, gray	10	10	Clay	36	398
Sand	45	55	Sand and clay layers	10	408
Shale	19	74	Clay and sand streaks	9	417
Sand with broken shale	100	174	Clay, sticky	8	425
Shale, white, soft	90	264	Clay, sand streaks and hard layers	70	495
Clay, tough, white	82	346	Clay, sandy	35	530
Sand and sandrock	14	360	Clay	10	540
Clay, tough, white	139	499	Clay, sandy		
Sand with white clay	16	515		50	590
Gumbo, sandy and tough	42	557	Sand and hard streaks	26	616
Sand, tough, broken	32	589	Shale	2	618
Shale, sandy	18	607	Sand and shale layers	66	684

Table 8.—Drillers' Logs of Wells in Montgomery and Adjacent Counties—Continued

	THICKNESS (FEET)	DEPTH (FEET)		THICKNESS (FEET)	DEPTH (FEET)
Well TS-60-45-80	5—Continued		Well TS-60-	46-707	
Shale, sandy and sand	25	709	Owner: Charles B. Wrightsman		
Shale and sandy shale	28	737	Driller: Con-Tex Water Well Co.		
Sand and shale layers	11	748	Clay and sand, red	34	34
Shale and sandy shale	42	790	Clay with sand streaks	5	39
Shale, sand and hard streaks	10	800	Sand, white	20	59
			Sand and white gravel	43	102
Well TS-60-46-102			Sand and red gravel	33	135
Owner: Thelbert Sheffield Driller: Keens Water Wells			Sand, hard	12	147
Clay	17	17	Sand, gray and black	11	158
Sand	13	30	Shale, blue	30	188
	13	43	Sand streaks and shale	6	194
Clay			Sand streaks, hard and shale	18	212
Sand	58	101	Sand	6	218
Clay	16	117	Shale, sandy blue	9	227
Sand	18	135			
Clay	5	140	Well TS-60-46-708		
Sand and gravel	29	169	Owner: Pladger Phenix Driller: Con-Tex Water Well Co.		
Clay	6	175	Clay	17	17
Sand	5	180	Sand	13	30
Clay	2	182	Sand and gravel	13	43
Well TS-60-46-204			Clay and sand	6	49
Owner: Rigley Owens (KNRO Radio)			Sand	16	65
Driller: Con-Tex Water Well Co.		Shale, blue	15	80	
Clay and sand	8	8	Shale and hard sand streaks	7	87
Clay and iron ore	10	18	Sand, hard	2	89
Sand and clay, red	7	25	Sand	27	116
Sand	35	60	Shale	18	134
Well TS-60-46-303			Sand	30	164
Owner: William G. Vaughn			Sand, shale and lime	32	196
Driller: Con-Tex			Sand, shale and inne		190
Clay and iron ore	44	44	Well TS-60-46-801		
Sand with clay, red	4	48	Owner: Humble Oil Co. Driller: Luther Patterson		
Sand	35	83	Clay	24	24
Clay	2	85	Shale, sandy	21	45
Sand	36	121	Shale	66	111
			Sand and rock	74	185
			Shale	250	
			Silaie	250	435

Table 8.—Drillers' Logs of Wells in Montgomery and Adjacent Counties—Continued

	THICKNESS (FEET)	DEPTH (FEET)		THICKNESS (FEET)	DEPTH (FEET)
Well TS-60-46-801—Continued			Sand, broken	45	168
Shale, sandy	41	476	Rock	2	170
Shale	43	519	Shale	34	204
Shale, sandy	69	588	Sand, broken	51	255
Shale	14	602	Shale	98	353
Rock	30	632	Sand	7	360
Shale	8	640	Shale	7	367
Sand	30	670	Sand	30	397
DO NOT THE REAL PROPERTY.			Shale	5	402
Well TS-60-47-606			Sand	28	430
	Owner: Foster Lumber Co., Well 1 Driller: W. J. Giles		Shale	106	536
Sand and gravel	60	60	Rock	2	538
Clay, red	40	100	Shale	113	651
Gravel and gumbo	50	150	Sand	19	670
Sand, packed	25	175	Shale	22	692
Rock, gray	20	195	Sand	28	720
Gumbo	25	220	Shale	18	738
Sand, packed	27	247	Sand	52	790
Gumbo	135	382	Shale	14	804
Sand	10	392	Sand	62	866
Gumbo	27	419	Sand, broken	41	907
Gravel	21	440	Shale	4	911
Gravel and gumbo	18	458	Sand	26	937
Gumbo	76	534	Shale	177	1,114
Gravel	30	564	Sand	23	1,137
Gumbo	22	586	Shale	7	1,144
Rock	2	588	Sand	60	1,204
Boulders	8	596	Shale	5	1,209
Gumbo	10	606	Sand	5	1,214
Shale and gumbo	160	766	Shale	5	1,219
Water-bearing sand and gravel	40	806		Well TS-60-50-302	
Well TS-60-47-609			Owner: City of Magnolia Driller: McMasters-Pomeroy		
Owner: Foster Lum Driller: Layne			Clay, yellow	75	75
No record	4	4	Sand	20	95
Soil and clay	20	24	Clay	26	121
Sand, broken	71	95	Sand	25	146
Shale, sandy	28	123	Pack sand	42	188

Table 8.—Drillers' Logs of Wells in Montgomery and Adjacent Counties—Continued

	THICKNESS (FEET)	DEPTH (FEET)		THICKNESS (FEET)	DEPTH (FEET)
Well TS-60-50-3	302—Continued		Well TS-60-	51-103	
Hard rock	16	204	Owner: T. A. Satterwhite		
Sand and boulders	74	278	Driller: Leo R. Doyle		
Gumbo	125	403	Clay, red	45	45
Rock	2	405	Sand	10	55
Gumbo and boulders	110	515	Clay, brown	5	60
Sand, hard pack	89	604	Sand	7	67
Sand, fine-grained	36	640	Clay, white, brown		90
Shale, brown	67	707	Sand	20	110
Rock, hard lime	1	708	Clay, white	10	120
Shale, brown	10	718	Sand	20	140
Sand	23	741	Clay	5	145
Pack sand	32	773	Sand	25	170
Gumbo	10	783	Wall TS 60	E1 204	
Hard sand	25	808	Well TS-60-51-204		
Shale, brown	20	828	Owner: Frank McWhorter Driller: C. A. Rudel		
Sand	7	835	Clay, red	50	50
	148	983	Sand, fine	10	60
Shale and gumbo			Sand, mixed and clay	20	80
Sand and shale	45	1,028	Clay, red	30	110
Gumbo	38	1,066	Clay, bluish	40	150
Sand and gravel	19	1,085	Sand	20	170
Gumbo	97	1,182			
Shale and boulders	10	1,192	Well TS-60-51-301		
Gumbo, tough	108	1,300	Owner: Superior Oil Co., Well 3 Driller: Layne-Texas Co.		
Sand and gumbo	7	1,307	Soil 3		3
Rock	2	1,309	Clay and gravel	9	12
Sand	12	1,321	Sand	5	17
Lime rock	4	1,325	Clay, yellow	61	78
Sand	22	1,347	Sand and clay layers		156
Gumbo	4	1,351	Clay	6	162
Rock	4	1,355	Sand and fine gravel	45	207
Sand	28	1,383	Clay	3	210
Gumbo, sand and lime	6	1,389			
Pack sand	41	1,430	Well TS-60-51-302		
Shale, blue	16	1,446	Owner: Superior ( Driller: Layne		
Gumbo, tough	6	1,452	Sandy soil	3	3
			Sand, red and clay and gravel	18	21

Table 8.—Drillers' Logs of Wells in Montgomery and Adjacent Counties—Continued

	THICKNESS (FEET)	DEPTH (FEET)		THICKNESS (FEET)	DEPTH (FEET)
Well TS-60-51-302-0			Clay	60	282
Sand, yellow and fine gravel	17	38	Sand	44	326
Clay, red and yellow	61	99	Clay	33	359
Sand	32	131	Sand, coarse-grained	7	366
Clay, soft yellow	15	146	Clay and sandy clay	42	408
Sand	61	207	Sand	6	414
Clay, yellow	3	210	Clay	18	432
Clay, yellow		210	Sand	4	436
Well TS-60-51-	506		Sand and clay	28	464
Owner: Lester Go				1	
Driller: Lowry Water		1000	Rock		465
Clay, red, iron ore	30	30	Clay	14	479
Sand, red	52	82	Sand	6	485
Clay, white	44	126	Shale	16	501
Sand, good	37	163	Sand, fine-grained, and hard layers	26	527
Shale, broken	10	173	Shale	66	593
Sand, broken	10	183	Sand	32	625
Sand, good	28	211	Sand with thin clay layers	8	633
Well TS-60-51	-902		Clay	26	659
Owner: Dr. M. D. I	Meredith		Sand	17	676
Driller: C. A. F	ludel		Clay	18	694
Clay, red	60	60	Sand	72	766
Sand, fine	10	70	Clay	10	776
Sand and clay mixed	20	90	Well TS-60-52	-104	
Clay, yellow	30	120	Owner: Superior		
Clay, bluish, soft	30	150	Driller: Layne-Te		
Clay streaks and rock	10	160	Soil	4	4
Water sand	20	180	Clay	75	79
Well TS-60-52	101		Sand	53	132
			Clay	3	135
Owner: Superior Oil Driller: Layne-Te			Sand	124	259
Soil	14	14	Clay	51	310
Clay	51	65	Sand	9	319
Clay, sandy	20	85	Sand, broken and clay	49	368
Sand, fine-grained and clay	49	134	Clay	3	371
Clay, sandy	19	153	Shale	78	449
Sand	9	162	Sand, fine-grained	18	467
Clay, sandy	20	182	Shale and layers of sand	40	507
Sand, coarse-grained	40	222	Shale	23	530

Table 8.—Drillers' Logs of Wells in Montgomery and Adjacent Counties—Continued

	THICKNESS (FEET)	DEPTH (FEET)		THICKNESS (FEET)	DEPTH (FEET)
	Well TS-60-52-104—Continued		Well TS-60	)-53-102	
Sand	10	540	Owner: John		
Gumbo	5	545	Driller: Con-Tex		0.4
Clay	49	594	Clay with red sand	24	24
Sand	56	650	Sand with gravel	16	40
Rock	1	651	Clay with red gravel	23	63
Clay	40	691	Sand and gravel	15	78
Sand, broken	7	698	Well TS-60	)-53-103	
Sand	54	752	Owner: W. G. Jor		
Clay, sandy	8	760	Driller: Frye		
Sand	24	784	Soil	12	12
Clay	5	789	Sand, red and clay	10	22
			Sand and gravel	20	42
	Well TS-60-52-706		Clay, sandy	30	72
	Owner: J. M. Williams Driller: Norman R. Corgey		Shale and gravel	10	82
Soil	9	9	Gumbo, yellow	30	112
Clay	9	18	Sand	20	132
Sand	22	40	Sand and thin shale	10	142
Clay	5	45	Shale	40	182
Sand	30	75	Shale and sand	10	192
Clay	15	90	Shale with thin shale layers	20	212
Gravel	10	100	Well TS-60	)-53-104	
Clay	4	104	Owner: W. G. Jor	nes State Forest	
Sand	6	110	Driller: Layno	e-Texas Co.	
Clay	8	118	Clay	30	30
Sand	23	141	Sand and gravel	50	80
			Clay	41	121
	Well TS-60-52-806		Sand	88	209
	Owner: Frank Martin Driller: Leo Doyle		Well TS-60	)-53-2 <b>0</b> 2	
Clay	17	17	Owner: Ted		
Sand	33	50	Driller: Con-Tex		22
Clay	25	75	Sand, white	23	23
Sand	20	95	Clay, red	8	31
Clay	15	110	Sand, red and white	21	52
Sand	24	134	Clay with gravel	35	87
			Sand	12	99

Table 8.—Drillers' Logs of Wells in Montgomery and Adjacent Counties—Continued

	THICKNESS (FEET)	DEPTH (FEET)		THICKNESS (FEET)	DEPTH (FEET)
Well TS-60-53	3-302		Well TS-60-54	-402	
Owner: C. La			Owner: G. A. N		
Driller: Con-Tex Wa		a series	Driller: Con-Tex Wa		-00
Sand	5	5	Clay and gravel	28	28
Clay	15	20	Sand, white and gravel	23	51
Sand	20	40	Clay	29	80
Clay	20	60	Sand and clay streaks	15	95
Sand	12	72	Clay, blue and gravel	22	117
Clay	9	81	Sand	13	130
Sand	11	92	Well TS-60-54	1-604	
Clay	13	105	Owner: John F. I	Freeman	
Sand, coarse, white	43	148	Driller: Con-Tex Wa	ter Well Co.	
Clay	12	160	Clay	18	18
Sand, fine white	35	195	Sand and gravel	11	29
Well TS-60-5	3-805		Clay and sand	11	40
Owner: Lake Chat			Sand	10	50
Driller: Con-Tex Wa			Clay and sand	6	56
Sand and clay, red	25	25	Sand and gravel	22	78
Sand and gravel, red	46	71	Shale	4	82
Clay	8	79	Sand	38	120
Sand	14	93	W-II TO CO FI	- 200	
Clay with lime	76	169	Well TS-60-55		
Sand	28	197	Owner: L. E. Jo Driller: Noak Dr		
Clay with lime	11	208	Clay, red and iron ore	22	22
Sand and gravel	28	236	Clay, white	8	30
W U TO CO F			Sand and fine gravel	34	64
Well TS-60-5			Clay, red and white	8	72
Owner: Humb Driller: Con-Tex Wa			Sand	48	120
Sand and clay	14	14	Sand and clay streaks	10	130
Sand and gravel, red	19	33	Clay, red and white	35	165
Clay	15	48	Sand	11	176
Sand, red	10	58	Clay	3	179
Clay, white	17	75	Sand	9	188
Sand	27	102	Sand and lime with rock streaks	6	194
Clay, blue	28	130	Clay	39	233
Sand	16	146	Sand	25	258
Shale, sandy	29	175			
Sand	20	195			

Table 8.—Drillers' Logs of Wells in Montgomery and Adjacent Counties—Continued

	THICKNESS (FEET)	DEPTH (FEET)		THICKNESS (FEET)	DEPTH (FEET)
Well TS-	60-55-504		Sand	24	192
Owner: Ph	nilip Dearing		Shale, loose and broken	116	308
Driller: C &	C Contractors		Sand, top loose and broken	28	336
Soil, sandy	2	2	Sand, good	17	353
Iron ore, sandy	8	10			
Shale, off white	8	18	Well TS-60	)-55-905	
Sand, reddish and shale	8	26	Owner: San Jacii Driller: Lowry W		
Clay, gray	14	40	Clay, red	35	35
Shale, red and blue	8	48	Sand	66	101
Water sand and gravel	32	80			
Well TS.	-60-55-801		Well TS-60	)-58-205	
	ohn Calhoun		Owner: A. D Driller: Tomba		
	ex Water Well Co.		Soil	5	5
Clay	12	12	Shale	3	8
Sand, red	38	50	Sand and broken rock	12	20
Clay	12	62	Shale, sandy	6	26
Sand, red	38	100	Sand	29	55
Clay	16	116	Shale	3	58
Sand, white, coarse	53	169	Sand, gravel and iron ore	28	86
Well TS	-60-55-901		Shale, blue	64	150
Owner: D.	V. Robinson ak Drilling Co.		Sand	10	160
Soil	7	7	Well TS-60-61-2	06, partial log	
Clay, red	3	10	Owner: C. Driller:		
Water sand	4	14	Clay	20	20
Clay, blue	6	20	Sand, white	79	99
Sand and gravel	17	37	Clay	3	102
Clay, blue with streaks	5	42	Sand, white	36	138
Sand, fine-grained	16	58	Clay	11	149
Sand, coarse and fine gravel	12	70	Sand	4	153
Clay, blue with streaks	2	72	Gumbo	37	190
Sand, fine	10	82	Sand, hard	26	216
Well TO	SO SE DOM		Shale and boulders	40	256
	-60-55-904		Rock and gumbo	10	266
	Water Wells, Inc.		Rock and sand	13	279
Clay, red	37	37	Shale and boulders	21	300
Sand	94	131	Shale, red and brown	68	368
Clay, white and shale	37	168	Gumbo, red	11	379

Table 8.—Drillers' Logs of Wells in Montgomery and Adjacent Counties—Continued

	THICKNESS (FEET)	DEPTH (FEET)		THICKNESS (FEET)	DEPTH (FEET)
Well TS-60-61-206, partia	l log—Continued		Sand and boulders	43	1,371
Sand, hard	15	394	Shale, blue	16	1,387
Gumbo, pink	102	496	Pack sand and boulders	15	1,402
Rock	2	498	Shale, blue	32	1,434
Shale, brown	32	530	Sand, hard white	6	1,440
Gumbo, pink	10	540	Sand, blue and white	15	1,455
Shale, brown	12	552	Gumbo	75	1,530
Gumbo, pink	10	562	Total depth		2,285
Rock	2	564			
Gumbo	5	569	Well TS-60-62		
Rock	1	570	Owner: Floyd ( Driller: -		
Gumbo, pink	10	580	Shale, yellow	45	45
Sand and boulders	8	588	Water sand with streaks of shale	291	336
Gumbo, pink and boulders	47	635	Sand and shale	84	420
Shale, blue	15	650	Shale	45	465
Gumbo, pink	13	663	Sand and shale	731	1,196
Shale, sandy	14	677	Shale and shells	130	1,326
Gumbo, pink	51	728	Sand with streaks of shale	61	1,387
Sand, blue	22	750	Shale	217	1,604
Sand, blue water	15	765	Sand	25	1,629
Shale, blue	23	788	Shale	53	1,682
Shale, white sandy	4	792	Shale, sticky	78	1,760
Rock, hard	17	809	Shale, sandy	280	2,040
Shale, blue	17	826	Shale	920	2,960
Water sand	92	918	Shale, sandy	35	2,995
Gumbo	32	950	Shale	45	3,040
Shale, sandy and boulders	45	995	Sand	40	3,080
Gumbo	15	1,010	Shale	126	3,206
Lime, sandy	25	1,035	Sand, hard	8	3,214
Shale and gumbo	49	1,084	Sand, hard, lime and shell	58	3,272
Shale, sandy and boulders	16	1,100	Shale	118	3,390
Gumbo and lime	95	1,195	Shale and shells	322	3,712
Shale, blue and boulders	15	1,210	Shale with streaks of sand	90	3,802
Gumbo	8	1,218	Sand	70	3,872
Water sand	7	1,225	Shale and shells	359	4,231
Gumbo, pink, blue and brown	90	1,315	Shale and lime	225	4,456
Sand, blue gumbo	3	1,318	Shale and shells	310	4,766
Shale, pink and blue	10	1,328	Shale with sand streaks	16	4,782

Table 8.—Drillers' Logs of Wells in Montgomery and Adjacent Counties—Continued

	THICKNESS (FEET)	DEPTH (FEET)			EPTH EET)
Well TS-60-62-301-	Continued		Sand	8	948
Shale	188	4,970	Shale	4	952
Sand, hard	4	4,974	Sand	6	958
Shale, sandy	41	5,015	Gumbo	9	967
Shale and lime shells	130	5,145	Sand	13	980
Shale and shells	140	5,285	Gumbo	12	992
Shale, sandy	40	5,325		U TC 60 62 101	
Shale with streaks of sand	84	5,409		HI TS-60-63-101	
Shale and shells	252	5,661		r: H. L. McConnell : C & C Contractors	
Shale with breaks of lime and shell	706	6,367	Soil	3	3
Shale	250	6,617	Clay, yellowish-brown	37	40
			Sand, fine	10	50
Well TS-60-62-601			Clay, bluish	6	56
Owner: Baker B Driller: H. R. A			Water sand	18	74
Sand	150	150	We	ell TS-60-63-105	
Clay, red	15	165		ney Independent School Dist.	
Sand and boulders	25	190		Driller: Noack	
Clay	15	205	Clay	60	60
Sand	45	250	Sand	37	97
Clay and gravel	30	280	Clay	44	141
Sand	45	325	Sand	4	145
Gumbo, blue	15	340	Rock and sand	7	152
Sand	55	395	Clay	29	181
Clay, sandy	20	415	Sand	14	195
Clay	35	450	Clay	7	202
Sand	90	540	Sand	41	243
Clay	25	565	Clay	41	284
Sand	65	630	Sand	11	295
Clay	20	650	Clay	11	306
Sand	80	730	Sand	3	309
Gumbo	10	740	Clay	5	314
Clay, sandy	26	766	Sand	38	352
Gumbo	20	786	Rock and clay	14	366
Artesian water sand	94	880	Sand	27	393
Gumbo, tough	6	886	W	ell TS-60-63-403	
Gumbo	24	910		er: V. H. Edwards	
Shale, sandy	22	932	Driller	: C & C Contractors	
Sand	3	935	Soil	3	3
Shale, sandy	5	940	Sand	35	38

Table 8.—Drillers' Logs of Wells in Montgomery and Adjacent Counties—Continued

	THICKNESS (FEET)	(FEET)		THICKNESS (FEET)	DEPTH (FEET)
Well TS-60-63-403-	-Continued		Shale	76	712
Clay, streaks of red and blue	9	47	Sand and shale streaks	36	748
Shale, hard blue	14	61	Sand	23	771
Water sand, gray with black specks	20	81	Shale	16	787
			Sand and shale streaks	5	792
Grimes Cou			Sand	43	835
Well KW-60-4			Shale	17	852
Owner: - Driller: Seismogr			Shale, sandy	15	867
Sand, fine-grained	18	18	Sand	12	879
Clay, sandy	39	57	Shale	4	883
Sand, fine-grained	13	70	Shale, sandy	8	891
Clay, calcareous	265	335	Shale	8	899
Silt, fine-grained sand, some lime	32	367	Sand and shale streaks	15	914
Clay, calcareous	40	407	Sand	15	929
Sand, some lime	21	428	Shale, blue and gray	56	985
Clay, calcareous	10	438	Shale, sandy	21	1,006
Sand, some lime and clay breaks	34	472	Shale	26	1,032
Clay, calcareous	21	493	Shale, sandy	75	1,107
Sand, silty and some lime	12	505	Sand	43	1,150
Clay, calcareous	100	605	Shale	13	1,163
Sand, silty and some lime	20	625	Sand	26	1,189
			Shale, sandy	5	1,194
Liberty Cou			Sand	26	1,220
Well SB-60-4			Sand and shale streaks	25	1,245
Owner: City of Clev Driller: Layne-T			Shale	10	1,255
Sand	10	10	Shale, sandy	8	1,263
Clay	90	100	Sand	39	1,302
Sand and gravel	14	114	Sand and thin shale breaks	33	1,335
Shale, sandy	160	274	Shale	2	1,337
Sand	61	335	MI-H CD CO	40 400	
Shale	44	379	Well SB-60		
Clay	10	389	Owner: City of Cl Driller: Layne		
Sand	7	396	Soil	8	8
Shale	32	428	Clay	44	52
Shale, sandy	69	497	Sand	24	76
Shale	51	548	Clay	14	90
Shale and sand	69	617	Sand	12	102
Sand, hard	19	636	Clay	24	126

Table 8.—Drillers' Logs of Wells in Montgomery and Adjacent Counties—Continued

	THICKNESS (FEET)	DEPTH (FEET)		THICKNESS (FEET)	DEPTH (FEET)
Well SB-60-48-102-	-Continued		Sand	6	26
Clay, soft, sandy	18	144	Clay	24	50
Sand	9	153	Sand	29	79
Clay	54	207	Clay	2	81
Sand	12	219	Sand	29	110
Clay	16	235	Clay	5	115
Clay breaks, sand and gravel	16	251	Sand	30	145
Clay	30	281	Clay	61	206
Sand	9	290	Sand, coarse and gravel	11	217
Sand and gravel	53	343	Clay	17	234
Clay	87	430	Gravel	51	285
Sand	24	454	Clay, soft, yellow, and sand	4	289
Clay	70	524	Sand and gravel	25	314
Hard layers	1	525	Clay with sand breaks	21	335
Clay, sandy, and breaks of sand	9	534	Clay	98	433
Clay	84	618	Hard layers	1	434
Sand	18	636	Clay	61	495
Clay, sandy	4	640	Hard layers	2	497
Clay	8	648	Clay	29	526
Shale, hard, sticky	19	667	Hard layers	1	527
Clay	87	754	Clay	83	610
Sand	20	774	Sand	26	636
Clay	20	794	Clay	10	646
Sand breaks and shale	21	815	Gumbo	105	751
Sand	17	832	Sand	19	770
Shale	13	845	Shale, sticky	21	791
W-U-0D-00-4	2 400		Shale, hard, sandy	22	813
Well SB-60-44			Sand breaks and shale	17	830
Owner: City of Cleve Driller: Layne-T			Shale, sticky	80	910
Soil	6	6	Sand	16	926
Clay, soft, yellow	14	20	Shale, sticky	3	929

Table 9.—Water Levels in Wells in Montgomery and Adjacent Counties (Depth to water in feet below land surface)

	DATE	WATER LEVEL	D	ATE	WATER LEVEL	D	ATE	WATER LEVEL
	Montgomery Co	unty	June	16, 1955	50.18	Feb.	9, 1966	50.86
	Well TS-60-35-	201	Sept.	20	50.41	June	22	50.67
	Owner: Flower F	ollett	Dec.	21	50.60	Dec.	2	50.85
Nov.	28, 1952	56.03	Feb.	14, 1956	50.63	Feb.	15, 1967	51.13
Dec.	22	55.87	June	13	50.83			
Feb.	2, 1953	55.99	Sept.	21	51.04		Well TS-60-37	
June	22	55.98	Dec.	11	51.27	Own	er: City of Wil	lis, Well 1
Oct.	2	56.18	Feb.	19, 1957	51.36	June	10, 1942	180.70
Dec.	9	56.34	June	13	51.42	Dec.	9, 1955	185.11
Feb.	16, 1954	56.27	Sept.	13	51.62	Feb.	14, 1956	185.00
June	14	56.19	Dec.	12	51.70	Sept.	21	197.26
Sept.	28	56.54	Feb.	20, 1958	51.51	Dec.	11	187.07
Dec.	14	56.59	June	10	51.12	Feb.	19, 1957	186.71
	4, 1955		Sept.	17	51.37	June	13	186.33
Feb.		56.83	Dec.	16	51.48	Sept.	13	187.18
June	16	57.03	Feb.	12, 1959	51.33	Dec.	12	186.71
Sept.	20	57.26	June	16	51.37	Feb.	20, 1958	186.26
Dec.	21	57.94	Sept.	23	51.50	June	10	186.25
Feb.	12, 1956	57.37	Dec.	17	51.38	Sept.	17	187.33
June	13	57.54	Mar.	1, 1960	51.34	Dec.	16	187.08
Sept.	21	59.91	June	10	51.05	Feb.	12, 1959	186.53
Dec.	11	Dry	Sept.	19	50.99	June	16	186.70
Feb.	19, 1957	Dry	Feb.	23, 1961	50.28	Sept.	23	187.05
June	13	Dry	June	15	49.95	Mar.	1, 1960	186.27
Dec.	12	Dry	Dec.	13	50.07	Sept.	19	186.21
	Well TS-60-35-	202				Feb.	23, 1961	185.19
(	Owner: Flower F	ollett	Feb. June	20, 1962 19	49.92 49.87	Dec.	13	185.54
Nov.	28, 1952	58.32	Sept.	25	50.10	Feb.	20, 1962	185.88
Dec.	22	48.17	Dec.	14	50.36	Sept.	25	186.23
Feb.	2, 1953	49.30	Mar.			Dec.	14, 1962	186.48
June	22	49.35	Feb.	1, 1963 17, 1964	50.12	Nov.	1, 1963	186.06
Oct.	2	49.53			50.55	Feb.	17, 1964	186.61
Dec.	9	49.48	June	17	50.27	Feb.	10, 1965	188.04
Feb.	16, 1954	49.45	Sept.	18	50.72	Feb.	9, 1966	190.59
June	14	49.37	Dec.	2 1005	50.60	Feb.	15, 1967	190.69
Sept.	28	49.83	Feb.	2, 1965	50.48		Well TS 60 20	201
Dec.	12	49.92	June	1	50.49		Well TS-60-38 wner: Finch-Ja	
Feb.	4, 1955	49.47	Sept.	16	50.68	Dec.	9, 1965	21.96
			Dec.	3	50.93	Sept.	13, 1966	21.49

Table 9.—Water Levels in Wells in Montgomery and Adjacent Counties—Continued (Depth to water in feet below land surface)

D	ATE	WATER LEVEL	D	ATE	WATER LEVEL	D	ATE	WATER LEVEL
Well T	'S-60-38-801—0	Continued		Nell TS-60-45-1	04	Sept.	18, 1947	39.11
Sept.	16, 1966	21.31		wner: R. E. Hix	and	Dec.	18	39.92
Sept.	18	21.54		J. W. Bolingho	use	Feb.	18, 1948	39.94
Oct.	10	21.70	Oct.	3, 1940	44.40	June	16	40.88
Oct.	24	21.68	Dec.	5	44.20	Sept.	28	41.27
Oct.	25	21.74	Jan.	27, 1941	43.57	Dec.	16	41.80
Nov.	6	21.75	Feb.	26	43.35	Feb.	14, 1949	41.92
	21	21.88	Apr.	8	42.53	June	15	41.61
Nov.			June	3	42.16			
Nov.	23	21.90	July	3	41.82	Sept.	28	42.02
Dec.	2	21.87	Aug.	15	41.93	Dec.	19	41.61
Dec.	13	21.87	Sept.	19	42.02	Feb.	14, 1950	40.86
Dec.	28	21.73	Nov.	4	40.67	June	20	39.78
Jan.	12, 1967	21.71				Sept.	26	40.64
Feb.	13	21.69	Dec.	16	40.45	Dec.	7	41.38
Feb.	15	21.50	Jan.	22, 1942	40.43	Mar.	5, 1951	41.51
Feb.	28	21.56	May	7	39.10	June	19	42.32
Mar.	26	21.31	July	29	39.05	Sept.	20	42.98
	18	21.48	Sept.	18	38.72	Dec.	11	43.34
Apr.	10	21.40	Jan.	20, 1943	38.81	Feb.	11, 1952	43.32
	Well TS-60-38	805	Mar.	28	39.53	June	23	43.97
0	wner: Finch-Ja	cobsen	July	21	39.53			44.14
Dec.	9, 1965	12.04	Aug.	26	39.66	Sept.	9	
Sept.	9, 1966	13.71	Jan.	28, 1944	40.52	Oct.	22	44.33
Sept.	16	13.00	May	29	40.07	Feb.	2, 1953	44.53
Sept.	18	13.11	July	21	40.48	June	22	44.69
Oct.	24	13.92	Sept.	18	40.63	Oct.	2	44.92
	6	13.41		13	40.94	Dec.	9	44.93
Nov.	21		Dec.			Feb.	16, 1954	44.98
Nov.		13.45	Jan.	24, 1945	40.33	June	14	45.30
Nov.	23	13.51	Mar.	26	39.56	Sept.	28	45.49
Dec.	2	13.88	June	15	39.16	Dec.	14	45.54
Dec.	13	13.30	Jan.	11, 1946	39.76	Feb.	7, 1955	45.34
Dec.	28	13.17	May	27	39.07	June <sup>-</sup>	16	45.74
Jan.	12, 1967	13.16	July	10	39.02	Sept.	20	Well
Feb.	13	14.06	Sept.	20	39.78			destroyed
Feb.	15	13.18	Dec.	6	39.30		Well TS-60-4	5-106
Feb.	28	13.20	Jan.	31, 1947	37.79		Owner: R. E	
Apr.	18	12.96	Mar.	17	38.09	N-7		
			June	4.	37.94	Nov.	13, 1931	16.00
						Nov.	25	15.98

Table 9.—Water Levels in Wells in Montgomery and Adjacent Counties—Continued (Depth to water in feet below land surface)

	DATE	WATER LEVEL	DA	ATE	WATER LEVEL	D/	ATE	WATER LEVEL
Wel	I TS-60-45-106-	Continued	25 db 1	Nell TS-60-45-1	07	June	21, 1943	8.39
Dec.	2, 1931	15.46		Owner: J. M. Li	iles	Aug.	26	4.84
Dec.	9	12.90	June	10, 1940	10.86	Jan.	28, 1944	.63
Dec.	15	11.38	June	11	10.42	June	3	5.92
Dec.	22	9.79	June	12	10.20	July	21	8.60
Dec.	29	10.70	June	13	9.99	Sept.	18	9.54
Jan.	5, 1932	5.42	June	15	9.88	Dec.	13	7.61
Jan.	12	2.18	June	21	10.22	Jan.	24, 1945	6.05
Jan.	19	6.41	June	26	10.54	Mar.	26	6.08
Jan.	28	4.78	July	1	10.20	June	15	6.88
Feb.	2	7.50	July	16	9.05	Jan.	11, 1946	7.07
Feb.	9	8.78	Aug.	21	11.12	May	27	4.89
Feb.	15	9.27	Oct.	4	12.13	July	10	6.21
Feb.	22	2.26	Dec.	5	9.29	Sept.	20	9.00
Mar.	7	5.59	Jan.	9, 1941	8.64	Dec.	6	5.43
Mar.	14	7.19	Jan.	18	8.48	Jan.	31, 1947	4.71
Mar.	21	8.66	Jan.	24	8.32	Mar.	17	6.57
Mar.	28	9.90	Jan.	31	8.54	June	4	6.49
Apr.	4	9.84	Feb.	14	8.50	Sept.	18	9.91
Apr.	11	11.06	Feb.	22	8.45	Dec.	18	8.93
Apr.	18	11.10	Feb.	27	8.19	Feb.	18, 1948	7.75
Apr.	25	11.25	Mar.	25	7.07	June	16	9.84
May	2	11.62	May	13	6.45	Sept.	28	11.36
May	9	11.95	May	27	7.70	Dec.	16	12.06
May	16	11.75	June	10	6.70	Feb.	14, 1949	10.48
July	25	14.60	June	20	5.62	June	15	9.59
Aug.	31	15.50	July	8	6.85	Sept.	28	11.19
Sept.	27	12.78	July	30	7.20	Dec.	19	7.19
Oct.	21	16.43	Aug.	15	7.98	Feb.	14, 1950	6.46
Feb.	7, 1938	31.71	Sept.	3	8.77	June	20	6.69
May	13	30.80	Sept.	19	9.26	Sept.	26	10.33
Oct.	26	43.84	Nov.	4	5.48	Dec.	7	11.45
Dec.	17	43.39	Dec.	16	7.24	Mar.	5, 1951	11.57
Jan.	26, 1939	43.96	Jan.	22, 1942	7.78	June	19	11.75
May	24	43.84	July	29	6.28	Sept.	20	12.59
Aug.	3	44.70	Sept.	18	1.85	Dec.	11	13.09
			Jan.	20, 1943	5.70	Feb.	11, 1952	12.36
			Mar.	28	7.23	June	23	11.02

Table 9.—Water Levels in Wells in Montgomery and Adjacent Counties—Continued (Depth to water in feet below land surface)

D	ATE	WATER LEVEL	DA	ATE	WATER LEVEL	Di	ATE	WATER LEVEL
Well T	S-60-45-107-C	ontinued	Oct.	4, 1940	12.59	Sept.	20, 1946	9.14
Sept.	12, 1952	12.56	Dec.	5	10.16	Dec.	6	5.87
Dec.	22	12.52	Jan.	9, 1941	9.44	Jan.	31, 1947	5.13
Feb.	2, 1953	13.17	Jan.	18	9.25	Mar.	17	6.88
June	22	10.53	Jan.	24	9.08	June	4	6.82
Oct.	2	12.17	Jan.	31	9.28	Sept.	18	9.96
Dec.	9	12.59	Feb.	14	9.21	Dec.	18	9.24
Feb.	16, 1954	10.80	Feb.	22	9.19	Feb.	18, 1948	8.09
June	14	11.99	Feb.	27	8.95	June	16	10.01
Oct.	28	13.16	May	25	7.88	Sept.	28	11.42
Dec.	14	11.91	May	13	8.26	Dec.	16	12.07
Feb.	7, 1955	9.69	May	27	8.34	Feb.	14, 1949	10.78
June	16	11.33	June	10	7.45	June	15	9.84
Sept.	20	12.61	June	20	6.52	Sept.	28	11.34
Dec.	21	13.18	July	8	7.66	Dec.	19	7.73
Feb.	14, 1956	10.85	July	30	7.91	Feb.	14, 1950	6.97
June	13	11.86	Aug.	15	8.61	June	20	7.04
Sept.	21	13.47	Sept.	3	9.31	Sept.	26	10.42
Dec.	11	13.75	Sept.	19	9.82	Dec.	7	11.98
Feb.	19, 1957	13.67	Nov.	4	6.40	Mar.	5, 1951	12.17
June	13	11.30	Dec.	16	7.93	June	19	12.33
Sept.	13	13.29	Jan.	29, 1942	8.16	Sept.	20	13.12
Dec.	12	10.90	Sept.	18	8.30	Dec.	11	13.64
June	1958	9.59	Jan.	20, 1943	7.69	Feb.	11, 1952	13.06
	W U TO CO 45 (	100	Mar.	28	9.02	June	23	11.67
	Well TS-60-45-1		June	21	10.04	Sept.	12, 1953	13.14
	Owner: J. M. L		Aug.	26	10.28	Dec.	22, 1952	13.31
June	8, 1940	11.65	Jan.	28, 1944	8.92	Feb.	2	12.86
June	10	11.47	June	3	7.77	June	22	11.22
June	11		July	21	10.22	Oct.	2	12.79
June	12	10.72 10.79	Sept.	18	11.15	Dec.	9, 1953	13.22
June	13		Dec.	13	8.95	Feb.	16, 1954	11.58
June	15 21	10.75 10.94	Jan.	24, 1945	8.04	June	14	12.54
June	26	11.21	May	26	7.93	Sept.	28	13.23
July	1	10.94	June	15	8.64	Dec.	14	12.76
July	16	10.73	Jan.	11, 1946	9.00	Feb.	7, 1955	10.76
Aug.	21	11.66	May	27	6.88	June	16	12.02
Aug.		11.00	July	10	8.03	Sept.	20	13.22

Table 9.—Water Levels in Wells in Montgomery and Adjacent Counties—Continued (Depth to water in feet below land surface)

D	ATE	WATER LEVEL	D	ATE	WATER LEVEL	D	ATE	WATER LEVEL
Well 7	rs-60-45-108—	Continued		Well TS-60-45-5	i04	Sept.	16, 1965	35.98
Dec.	21, 1955	13.79	Owner	: City of Conro	e, Well 2	Dec.	3	30.77
Feb.	14, 1956	11.88	June	16, 1956	26.16	Feb.	9, 1966	27.76
June	13	12.56	Sept.	21	34.68	June	22	25.77
Sept.	21	14.03	Dec.	11	21.85	Dec.	2	24.14
Dec.	11	14.31	Feb.	19, 1957	21.17	Feb.	15, 1967	25.95
Feb.	19, 1957	14.29	June	13	23.10			
Apr.	25	12.08	Sept.	13	28.20		Well TS-60-45	
June	13	12.03	Dec.	12	21.49		r: City of Con	
Sept.	13	13.83	Feb.	20, 1958	22.86	June	3, 1931	+ .62
Dec.	12	11.79	June	10	30.90	Aug.	12	3.73
Feb.	20, 1958	10.38	Sept.	17	25.48	Nov.	18	.05
June	10	10.82	Dec.	16	25.48	June	15, 1939	2.67
Sept.	17	13.24	Feb.	12, 1959	24.92	Aug.	3	1.78
Dec.	16	11.99	June	16	27.12	Sept.	25	7.69
Feb.	12, 1959	10.91	Sept.	23	32.01	Dec.	19	1.65
June	16	10.04	Dec.	17	25.13	Feb.	15, 1940	1.32
			Mar.	1, 1960	26.11	May	1	.94
	Well TS-60-45-		June	10	28.95	June	28	2.30
	Texas Highwa		Sept.	19	30.77	Aug.	21	11.83
Nov.	18, 1938	32.36	Feb.	23, 1961	35.70	Dec.	5	.40
Dec.	17	32.54	June	15	29.16	Feb.	26, 1941	.09
Jan.	26, 1939	32.43	Sept.	19	28.43	May	4	+ .65
Mar.	4	31.74	Dec.	13	33.84	June	3	+ .99
May	24	31.61	Feb.	20, 1962	28.83	July	3	+ .50
Aug.	3	32.15	June	19	21.58	Sept.	3	1.35
Sept.	25	32.40	Sept.	25	26.86	Nov.	4	+ .44
Dec.	19	33.00	Dec.	14	29.22	Dec.	16	+ .77
Feb.	15, 1940	32.80	Mar.	1, 1963	22.88	Jan.	22, 1942	+ .25
May	1	33.10	June	20	21.16	May	7	+ .79
June	28	32.20	Oct.	4	27.71	June	24	+ .90
Aug.	21	31.90	Dec.	2	22.90	Jan.	20, 1943	+ 1.07
Oct.	4	32.20	Feb.	17, 1964	24.16	June	21	.80
Dec.	5	31.50	June	17	24.37	Aug.	26	.75
Jan.	27, 1941	30.20	Sept.	18	33.80	Jan.	28, 1944	+ .66
Feb.	26	28.70	Dec.	2	25.53	May	29	+ 1.08
Apr.	8	27.99	Feb.	10, 1965	23.46	Sept.	18	4.65
June	3	27.42	June	1	24.53			
July	3	25.80						

## Table 9.—Water Levels in Wells in Montgomery and Adjacent Counties—Continued (Depth to water in feet below land surface)

D	DATE	WATER LEVEL	D	ATE	WATER LEVEL	D	ATE	WATER LEVEL
Well 1	TS-60-45-505—	Continued	Dec.	14, 1954	16.40	May	13, 1938	27.45
Dec.	13, 1944	.26	Feb.	4, 1955	23.82	Oct.	26	29.98
Jan.	24, 1945	.05	June	16	Well	Nov.	18	29.21
Mar,	26	1.62			destroyed	Dec.	17	29.50
June	15	6.50		Well TS-60-45-	507	Jan.	26, 1939	28.36
Jan.	11, 1946	3.95	Ov	vner: City of C	onroe	Mar.	4	26.72
May	27	1,33	Dec.	16, 1948	+ 12,00	May	24	28.56
July	10	10.57	Oct.	1954	2.00	Aug.	3	28.96
Sept.	20	4.30	Dec.	8, 1955	11,42	Sept.	25	29.56
Dec.	6	6.88	Jan.	13, 1967	20.21	Dec.	19	30.40
Jan.	31, 1947	5.87				Feb.	15, 1940	30.39
Mar.	17	+ .51		Well TS-60-45-	706	May	1	29.90
June	4	.64	Ow	ner: Elizabeth	Moody	June	28	29.52
Sept.	18	2.63	May	1941	Flows	Aug.	25	29.94
Sept.	28, 1948	11.11	Nov.	9, 1966	4.22	Oct.	4	30.25
Dec.	16	3.40	Feb.	28, 1967	4.23		5	Well
Feb.				Well TS-60-45-	901	Dec.	•	destroyed
	14, 1949	2.44						
June	15	2.30		Owner: L. John	nson		Well TS-60-45	2803
Come	00	1 70	lung	2 1021	00.00		11011 10-00-40	-000
Sept.	28	1.79	June	3, 1931	26.20		wner: Brown	
Dec.	19	2.06	Aug.	12	24.30			
Dec. Feb.	19 14, 1950	2.06 1.16	Aug. Nov.	12 25	24.30 25.77	c	wner: Brown	Estate
Dec. Feb. June	19 14, 1950 20	2.06 1.16 1.23	Aug. Nov. Dec.	12 25 15	24.30 25.77 23.68	Nov.	)wner: Brown 18, 1931	Estate 24.45
Dec. Feb. June Sept.	19 14, 1950 20 26	2.06 1.16 1.23 3.22	Aug. Nov. Dec. Jan.	12 25 15 19, 1932	24.30 25.77 23.68 20.70	Nov. Nov.	0wner: Brown 18, 1931 25	Estate 24.45 24.83
Dec. Feb. June Sept. Dec.	19 14, 1950 20 26 7	2.06 1.16 1.23 3.22 6.55	Aug. Nov. Dec. Jan. Jan.	12 25 15 19, 1932 29	24.30 25.77 23.68 20.70 17.93	Nov. Nov. Dec.	Dwner: Brown 18, 1931 25 2	24.45 24.83 24.48
Dec. Feb. June Sept. Dec. Mar.	19 14, 1950 20 26 7 5, 1951	2.06 1.16 1.23 3.22 6.55 4.73	Aug. Nov. Dec. Jan. Jan. Mar.	12 25 15 19, 1932 29 21	24.30 25.77 23.68 20.70 17.93 18.50	Nov. Nov. Dec. Dec.	Dwner: Brown 18, 1931 25 2 9	24.45 24.83 24.48 23.15
Dec. Feb. June Sept. Dec. Mar. June	19 14, 1950 20 26 7 5, 1951	2.06 1.16 1.23 3.22 6.55 4.73 11.53	Aug. Nov. Dec. Jan. Jan. Mar.	12 25 15 19, 1932 29 21 25	24.30 25.77 23.68 20.70 17.93 18.50 19.64	Nov. Nov. Dec. Dec. Dec.	Dwner: Brown 18, 1931 25 2 9	24.45 24.83 24.48 23.15 22.42
Dec. Feb. June Sept. Dec. Mar. June Sept.	19 14, 1950 20 26 7 5, 1951 19 20	2.06 1.16 1.23 3.22 6.55 4.73 11.53	Aug. Nov. Dec. Jan. Jan. Mar. Apr.	12 25 15 19, 1932 29 21 25	24.30 25.77 23.68 20.70 17.93 18.50 19.64 21.88	Nov. Nov. Dec. Dec. Dec. Dec.	Dwner: Brown 18, 1931 25 2 9 15	24.45 24.83 24.48 23.15 22.42 20.94
Dec. Feb. June Sept. Dec. Mar. June Sept. Dec.	19 14, 1950 20 26 7 5, 1951 19 20 11	2.06 1.16 1.23 3.22 6.55 4.73 11.53 10.24 8.42	Aug. Nov. Dec. Jan. Jan. Mar. Apr. May July	12 25 15 19, 1932 29 21 25 21	24.30 25.77 23.68 20.70 17.93 18.50 19.64 21.88 24.34	Nov. Nov. Dec. Dec. Dec. Dec.	Dwner: Brown 18, 1931 25 2 9 15 22 29	24.45 24.83 24.48 23.15 22.42 20.94 20.78
Dec. Feb. June Sept. Dec. Mar. June Sept.	19 14, 1950 20 26 7 5, 1951 19 20	2.06 1.16 1.23 3.22 6.55 4.73 11.53 10.24 8.42 3.89	Aug. Nov. Dec. Jan. Jan. Mar. Apr. May July Sept.	12 25 15 19, 1932 29 21 25 21 25 27	24.30 25.77 23.68 20.70 17.93 18.50 19.64 21.88 24.34 25.68	Nov. Nov. Dec. Dec. Dec. Dec. Jan.	Dwner: Brown 18, 1931 25 2 9 15 22 29 5, 1932	24.45 24.83 24.48 23.15 22.42 20.94 20.78 20.34
Dec. Feb. June Sept. Dec. Mar. June Sept. Dec.	19 14, 1950 20 26 7 5, 1951 19 20 11	2.06 1.16 1.23 3.22 6.55 4.73 11.53 10.24 8.42 3.89 10.79	Aug. Nov. Dec. Jan. Jan. Mar. Apr. May July Sept. Oct.	12 25 15 19, 1932 29 21 25 21 25 27	24.30 25.77 23.68 20.70 17.93 18.50 19.64 21.88 24.34 25.68 27.12	Nov. Nov. Dec. Dec. Dec. Jan. Jan.	Dwner: Brown 18, 1931 25 2 9 15 22 29 5, 1932	24.45 24.83 24.48 23.15 22.42 20.94 20.78 20.34 18.54
Dec. Feb. June Sept. Dec. Mar. June Sept. Dec. Feb.	19 14, 1950 20 26 7 5, 1951 19 20 11 11, 1952	2.06 1.16 1.23 3.22 6.55 4.73 11.53 10.24 8.42 3.89	Aug. Nov. Dec. Jan. Jan. Mar. Apr. May July Sept. Oct. Nov.	12 25 15 19, 1932 29 21 25 21 25 27 21 26	24.30 25.77 23.68 20.70 17.93 18.50 19.64 21.88 24.34 25.68 27.12 27.48	Nov. Nov. Dec. Dec. Dec. Jan. Jan. Jan.	Dwner: Brown 18, 1931 25 2 9 15 22 29 5, 1932 12 19 28	24.45 24.48 24.48 23.15 22.42 20.94 20.78 20.34 18.54 18.70 16.78
Dec. Feb. June Sept. Dec. Mar. June Sept. Dec. Feb. June	19 14, 1950 20 26 7 5, 1951 19 20 11 11, 1952 23	2.06 1.16 1.23 3.22 6.55 4.73 11.53 10.24 8.42 3.89 10.79	Aug. Nov. Dec. Jan. Jan. Mar. Apr. May July Sept. Oct.	12 25 15 19, 1932 29 21 25 21 25 27	24.30 25.77 23.68 20.70 17.93 18.50 19.64 21.88 24.34 25.68 27.12 27.48 26.91	Nov. Nov. Dec. Dec. Dec. Jan. Jan. Jan. Feb.	Dwner: Brown 18, 1931 25 2 9 15 22 29 5, 1932 12 19 28 2	24.45 24.48 24.48 23.15 22.42 20.94 20.78 20.34 18.54 18.70 16.78 16.82
Dec. Feb. June Sept. Dec. Mar. June Sept. Dec. Feb. June Sept.	19 14, 1950 20 26 7 5, 1951 19 20 11 11, 1952 23 12	2.06 1.16 1.23 3.22 6.55 4.73 11.53 10.24 8.42 3.89 10.79 11.81	Aug. Nov. Dec. Jan. Jan. Mar. Apr. May July Sept. Oct. Nov.	12 25 15 19, 1932 29 21 25 21 25 27 21 26	24.30 25.77 23.68 20.70 17.93 18.50 19.64 21.88 24.34 25.68 27.12 27.48 26.91 29.80	Nov. Nov. Dec. Dec. Dec. Jan. Jan. Jan. Feb. Feb.	Dwner: Brown 18, 1931 25 2 9 15 22 29 5, 1932 12 19 28 2 9	24.45 24.83 24.48 23.15 22.42 20.94 20.78 20.34 18.54 18.70 16.78 16.82 17.53
Dec. Feb. June Sept. Dec. Mar. June Sept. Dec. Feb. June Sept. Dec.	19 14, 1950 20 26 7 5, 1951 19 20 11 11, 1952 23 12 22	2.06 1.16 1.23 3.22 6.55 4.73 11.53 10.24 8.42 3.89 10.79 11.81 13.27	Aug. Nov. Dec. Jan. Jan. Mar. Apr. May July Sept. Oct. Nov. Dec.	12 25 15 19, 1932 29 21 25 21 25 27 21 26 30 25, 1933 15	24.30 25.77 23.68 20.70 17.93 18.50 19.64 21.88 24.34 25.68 27.12 27.48 26.91 29.80 25.84	Nov. Nov. Dec. Dec. Dec. Jan. Jan. Jan. Feb.	Dwner: Brown 18, 1931 25 2 9 15 22 29 5, 1932 12 19 28 2	24.45 24.48 24.48 23.15 22.42 20.94 20.78 20.34 18.54 18.70 16.78 16.82
Dec. Feb. June Sept. Dec. Mar. June Sept. Dec. Feb. June Sept. Feb. Feb.	19 14, 1950 20 26 7 5, 1951 19 20 11 11, 1952 23 12 22 2, 1953	2.06 1.16 1.23 3.22 6.55 4.73 11.53 10.24 8.42 3.89 10.79 11.81 13.27 11.78	Aug. Nov. Dec. Jan. Jan. Mar. Apr. May July Sept. Oct. Nov. Dec. Jan.	12 25 15 19, 1932 29 21 25 21 25 27 21 26 30 25, 1933	24.30 25.77 23.68 20.70 17.93 18.50 19.64 21.88 24.34 25.68 27.12 27.48 26.91 29.80	Nov. Nov. Dec. Dec. Dec. Jan. Jan. Jan. Feb. Feb.	Dwner: Brown 18, 1931 25 2 9 15 22 29 5, 1932 12 19 28 2 9 15	24.45 24.83 24.48 23.15 22.42 20.94 20.78 20.34 18.54 18.70 16.78 16.82 17.53 17.82 15.98
Dec. Feb. June Sept. Dec. Mar. June Sept. Dec. Feb. June Sept. Dec. Feb. June	19 14, 1950 20 26 7 5, 1951 19 20 11 11, 1952 23 12 22 2, 1953 22	2.06 1.16 1.23 3.22 6.55 4.73 11.53 10.24 8.42 3.89 10.79 11.81 13.27 11.78 19.74	Aug. Nov. Dec. Jan. Mar. Apr. May July Sept. Oct. Nov. Dec. Jan. Mar.	12 25 15 19, 1932 29 21 25 21 25 27 21 26 30 25, 1933 15 21, 1935 27, 1936	24.30 25.77 23.68 20.70 17.93 18.50 19.64 21.88 24.34 25.68 27.12 27.48 26.91 29.80 25.84	Nov. Nov. Nov. Dec. Dec. Dec. Jan. Jan. Jan. Feb. Feb. Feb. Mar.	Dwner: Brown 18, 1931 25 2 9 15 22 29 5, 1932 12 19 28 2 9 15 29 7	24.45 24.48 24.48 23.15 22.42 20.94 20.78 20.34 18.54 18.70 16.78 16.82 17.53 17.82 15.98 15.45
Dec. Feb. June Sept. Dec. Mar. June Sept. Dec. Feb. June Sept. Dec. Feb. June Oct.	19 14, 1950 20 26 7 5, 1951 19 20 11 11, 1952 23 12 22 2, 1953 22 10	2.06 1.16 1.23 3.22 6.55 4.73 11.53 10.24 8.42 3.89 10.79 11.81 13.27 11.78 19.74	Aug. Nov. Dec. Jan. Mar. Apr. May July Sept. Oct. Nov. Dec. Jan. Mar. Aug.	12 25 15 19, 1932 29 21 25 21 25 27 21 26 30 25, 1933 15 21, 1935	24.30 25.77 23.68 20.70 17.93 18.50 19.64 21.88 24.34 25.68 27.12 27.48 26.91 29.80 25.84 26.45	Nov. Nov. Dec. Dec. Dec. Jan. Jan. Jan. Feb. Feb. Feb. Mar. Mar.	Dwner: Brown 18, 1931 25 2 9 15 22 29 5, 1932 12 19 28 2 9 15 29 7 14	24.45 24.48 24.48 23.15 22.42 20.94 20.78 20.34 18.54 18.70 16.78 16.82 17.53 17.82 15.98 15.45 16.29
Dec. Feb. June Sept. Dec. Feb. June Sept. Dec. Feb. June Sept. Dec. Feb. June Oct. Dec.	19 14, 1950 20 26 7 5, 1951 19 20 11 11, 1952 23 12 22 2, 1953 22 10 9	2.06 1.16 1.23 3.22 6.55 4.73 11.53 10.24 8.42 3.89 10.79 11.81 13.27 11.78 19.74 19.07 11.72	Aug. Nov. Dec. Jan. Mar. Apr. May July Sept. Oct. Nov. Dec. Jan. Mar. Aug. Feb.	12 25 15 19, 1932 29 21 25 21 25 27 21 26 30 25, 1933 15 21, 1935 27, 1936	24.30 25.77 23.68 20.70 17.93 18.50 19.64 21.88 24.34 25.68 27.12 27.48 26.91 29.80 25.84 26.45 25.84	Nov. Nov. Nov. Dec. Dec. Dec. Jan. Jan. Jan. Feb. Feb. Feb. Mar.	Dwner: Brown 18, 1931 25 2 9 15 22 29 5, 1932 12 19 28 2 9 15 29 7	24.45 24.48 24.48 23.15 22.42 20.94 20.78 20.34 18.54 18.70 16.78 16.82 17.53 17.82 15.98 15.45

Table 9.—Water Levels in Wells in Montgomery and Adjacent Counties—Continued (Depth to water in feet below land surface)

D	ATE	WATER LEVEL	DA	ATE 200	WATER LEVEL	DA	ATE	WATER LEVEL
Well T	S-60-45-803—C	ontinued	Jan.	27, 1941	21.25	Dec.	16, 1948	24.87
Mar.	28, 1932	16.76	Feb.	26	20.60	Feb.	14, 1949	24.92
Apr.	4	18.27	Apr.	8	19.05	June	15	22.12
Apr.	11	18.70	June	3	17.93	Sept.	28	23.63
Apr.	18	18.84	July	3	17.00	Dec.	19	18.79
Apr.	25	19.31	Sept.	3	19.88	Feb.	14, 1950	15.83
May	2	20.46	Sept.	19	20.53	June	20	14.52
May	9	20.78	Nov.	4	13.96	Sept.	26	21.28
May	16	20.86	Dec.	16	15.71	Dec.	7	23.16
July	1	22.15	Jan.	22, 1942	17.06	Mar.	5, 1951	24.18
Sept.	27	23.90	May	7	14.26	June	19	24.54
Oct.	21	24.65	July	29	15.37	Sept.	20	25.25
Nov.	26	24.82	Sept.	18	15.90	Dec.	11	25.72
Dec.	30	24.64	Jan.	20, 1943	15.23	Jan.	13, 1952	26.00
Jan.	25, 1933	24.79	Mar.	28	16.81	Feb.	11	26.30
Mar.	15	21.00	June	21	18.85	June	23	24.40
May	8	22.87	Aug.	26	19.63	June	30	24.39
Nov.	24, 1934	25.86	Jan.	28, 1944	19.84	July	31	24.83
May	29, 1935	16.00	May	29	15.38	Aug.	2	24.81
Aug.	21	21.60	July	21	18.55	Sept.	2	25.20
Feb.	27, 1936	20.75	Sept.	18	21.21	Sept.	9	25.30
Feb.	7, 1938	22.31	Dec.	13	20.00	Dec.	22	25.95
May	13	22.64	Jan.	24, 1945	16.48	Dec.	23	25.97
Oct.	26	24.25	Mar.	26	16.38	Jan.	7, 1953	25.75
Nov.	18	24.48	June	15	15.46	Feb.	2	25.60
Dec.	17	24.80	Jan.	11, 1946	20.90	Mar.	5	25.26
Jan.	26, 1939	22.48	May	27	15.51	Mar.	12	25.03
Mar.	4	21.61	July	10	14.71	Mar.	23	24.83
May	24	23.35	Sept.	20	19.48	Mar.	30	24.70
Aug.	3	23.65	Dec.	6	15.63	Apr.	6	24.61
Sept.	25	24.46	Jan.	31, 1947	13.48	Apr.	14	24.67
Dec.	19	25.30	Mar.	17	15.71	Apr.	20	24.74
Feb.	15, 1940	25.04	June	4	16.24	Mar.	21	21.82
May	1	24.76	Sept.	18	21.67	June	1	21.82
June	28	24.26	Dec.	18	22.25	June	22	22.91
Aug.	25	24.52	Feb.	18, 1948	21.65	July	7	23.32
Oct.	4	25.10	June	16	22.52	Aug.	1	23.86
Dec.	5	24.00	Sept.	28	24.01	Sept.	3	24.32

Table 9.—Water Levels in Montgomery and Adjacent Counties—Continued (Depth to water in feet below land surface)

D	PATE	WATER LEVEL	D	ATE	WATER LEVEL	D	ATE	WATER LEVEL
Well 7	rs-60-45-803—	Continued	May	17, 1958	21.78	Oct.	4, 1963	23.86
Oct.	1, 1953	24.65	June	1	22.15	Dec.	2	24.43
Nov.	1	25.07	July	1	23.13	Feb.	17, 1964	24.14
Dec.	27	25.16	Aug.	1	23.75	Dec.	2	24.01
Jan.	29, 1954	24.75	Sept.	1	24.36	Jan.	4, 1965	24.00
Feb.	10	24.58	Oct.	22	24.56	Feb.	4	23.82
Mar.	1	24.66	Nov.	27	24.29	Mar.	20	22.70
Apr.	3	25.04	Dec.	16	24.41	Apr.	29	22.80
May	1	25.19	Jan.	23, 1959	24.69	May	17	22.81
June	14	25.52	Feb.	12	23.15	June	30	22.30
July	30	25.63	Mar.	13	22.83	July	31	22.99
Aug.	1	25.75	Apr.	14	21.24	Aug.	29	23.64
Sept.	1	25.99	June	16	20.73	Sept.	24	24.08
Oct.	24	25.90	Aug.	20	22.31	Oct.	30	24.44
Nov.	14	26.13	Sept.	23	22.79	Nov.	30	24.48
Dec.	26	26.18	Dec.	17	23.07	Dec.	1	24.50
Jan.	31, 1955	25.66	Mar.	1, 1960	18.81	Jan.	17, 1966	23.38
Feb.	18	25.03	May	31	20.44	Feb.	4	22.53
Mar.	31	24.66	June	10	20.92	Mar.	25	21.18
Apr.	3	24.56	Aug.	4	18.58	Apr.	15	21.19
May	1	24.83	Sept.	19	18.52	May	2	20.50
June	1	25.06	Oct.	7	19.46	June	27	20.42
June	16	25.20	Nov.	18	16.50	July	31	21.81
July	26	25.56	Dec.	29	13.58	Aug.	31	22.34
Aug.	18	25.76	Jan.	18, 1961	12.04	Sept.	30	23.18
Sept.	20	25.94	Feb.	20	11.98	Oct.	29	23.32
Oct.	27	26.21	Feb.	23	11.05	Nov.	28	23.87
June	13, 1957	25.95	Apr.	3	13.62	Dec.	24	24.17
June	16	25.99	May	9	15.61	Jan.	5, 1967	24.25
July	1	25.91	June	15	17.69	Feb.	15	24.27
Aug.	1	26.08	July	28	13.96	Mar.	9	24.49
Sept.	25	26.00	Sept.	19	15.02	Apr.	18	22.44
Oct.	15	25.96	Dec.	13	19.58		Well TS-60-45	-806
Nov.	23	25.06	Feb.	20, 1962	19.02	0	wner: M. H. C	
Dec.	31	24.48	June	19	20.03	Nov.	18, 1938	3.65
Feb.	28, 1958	21.68	Dec.	14	22.94	Dec.	17	3.53
Mar.	13	21.60	Mar.	1, 1963	19.72	Jan.	26, 1939	2.33
Apr.	5	21.88	June	20	22.43	Mar.	4	1.56
						iviai.		1.00

Table 9.—Water Levels in Montgomery and Adjacent Counties—Continued (Depth to water in feet below land surface)

D	ATE	WATER LEVEL	D.	ATE	WATER LEVEL	D	ATE	WATER LEVEL
Well T	S-60-45-806—Co	ntinued	Dec.	17, 1938	23.53	May	27, 1946	14.63
May	24, 1939	3.44	Jan.	26, 1939	22.27	July	10	13.75
Aug.	3	3.84	Mar.	4	22.91	Sept.	20	14.18
Sept.	25	3.78	May	24	22.56	Dec.	6	12.26
Dec.	19	4.50	Aug.	3	23,55	Jan.	31, 1947	10.73
		- MG 11 M	Sept.	23	24.15	Mar.	17	10.50
	Well TS-60-47-60		Dec.	19	23.80	June	4	11.24
Owner:	Foster Lumber (		Feb.	15, 1940	23.40	Sept.	18	13.16
		+ 10,00	May	1	24.02	Dec.	18	13.45
June	5, 1942	14.95	June	28	24.10	Feb.	18, 1948	13.05
Jan.	26, 1966	6.98	Aug.	25	24.40	June	16	20.71
	Well TS-60-51-30	)2	Oct.	4	24.40	Sept.	28	14.10
Owner	r: Superior Oil Co	., Well 2	Dec.	5	22.15	Dec.	16	15.36
	1942	84.00	Jan.	27, 1941	23.30	Feb.	14, 1949	14.82
June	23	84.04	Feb.	26	21.86	June	15	14.98
Dec.	6, 1966	88.40	Apr.	8	23.32	Sept.	28	14.91
			June	3	23.81	Dec.	19	13.93
	Well TS-60-53-50		July	3	24.38	Feb.	14, 1950	12.88
0	wner: Blair and S	Sons	Sept.	3	23.20	June	20	16.28
Nov.	18, 1931	16.20	Nov.	4	20.59	Sept.	26	17.39
Dec.	15	15.98	Dec.	16	21.10	Dec.	7	19.30
Jan.	19, 1932	16.21	Jan.	22, 1942	20.78	Mar.	5, 1951	16.09
Mar.	21	16.28	May	7	21.60	June	19	14.83
May	21	15.60	July	29	19.02	Sept.	20	15.03
July	1	15.82	Sept.	18	19.23	Dec.	11	15.40
Aug.	31	16.04	Jan.	20, 1943	17.16	Feb.	11, 1952	15.33
Sept.	27	21.18	Mar.	28	18.43	June	23	14.20
Nov.	26	21.60	June	21	21.46	June	30	14.24
Dec.	30	21.20	July	26	20.63	July	31	14.44
Jan.	25, 1933	21.74	Jan.	28, 1944	20.87	Sept.	12	14.97
Nov.	29, 1934	23.71	May	29	19.29	Dec.	22	15.50
May	29, 1935	24.08	July	21	20.98	Feb.	2, 1953	15.72
Aug.	21	26.78	Sept.	18	20.69	June	22	14.33
Feb.	27, 1936	22.34	Dec.	13	17.61			
Feb.	6, 1938	21.56	Jan.	23, 1945	16.75		Well TS-60-53	-504
May	13	21.70	Mar.	26	16.93	Own	er: E. W. Cast	leschouldt
Oct.	26	24.13	June	15	17.96	June	2, 1931	29.80
Nov.	18	24.17	Jan.	11, 1946	15.11	Aug.	12	29.43
						Dec.	15	29.38

## Table 9.—Water Levels in Montgomery and Adjacent Counties—Continued (Depth to water in feet below land surface)

D	PATE	WATER LEVEL	D	ATE	WATER LEVEL	D	ATE	WATER LEVEL
Well 7	rs-60-53-504—	Continued	Jan.	27, 1941	30.68	Sept.	28, 1948	28.06
Jan.	19, 1932	29,50	Feb.	26	28.90	Dec.	16	27.98
Feb.	29	29.28	Apr.	8	31.30	Feb.	14, 1949	27.88
Mar.	21	28.91	June	3	30.96	June	15	28.23
Apr.	25	29.67	July	3	31.45	Sept.	28	23.23
May	21	29.46	Aug.	15	31.75	Dec.	19	27.26
July	1	30.57	Sept.	19	31.05	Feb.	14, 1950	27.46
Aug.	31	30.08	Nov.	4	29.52	Sept.	26	27.86
Sept.	27	29.60	Dec.	16	30.97	Dec.	7	28.15
Oct.	21	31.60	Jan.	22, 1942	31.37	Mar.	5, 1951	28.05
Nov.	26	29.97	May	7	30.82	June	19	28.40
Dec.	30	29.77	July	29	31.04	Sept.	20	28.48
Jan.	25, 1933	29.84	Sept.	18	30.25	Dec.	11	28.66
Mar.	15	30.24	Jan.	20, 1943	30.39	Feb.	11, 1952	28.52
May	8	29.98	Mar.	28	29.96	June	23	28.94
June	24	31.44	June	21	30.12	June	30	28.88
Nov.	29, 1934	20.24	Aug.	26	30.35	July	31	28.83
May	29, 1935	30.52	Jan.	28, 1944	29.53	Sept.	12	29.03
July	21	30.87	May	29	29.30	Dec.	22	28.90
Feb.	27, 1936	30.15	July	21	29.73	Feb.	2, 1953	29.15
Aug.	13	38.91	Sept.	18	29.56	June	22	29.33
Feb.	6, 1938	30.35	Dec.	13	29.41	Oct.	2	29.65
May	13	30.19	Jan.	24, 1945	28.98	Dec.	9	29.43
Oct.	26	32.30	Mar.	26	29.16	Feb.	16, 1954	29.48
Nov.	18	30.79	June	15	29.27	June	14	30.38
Dec.	17	30.73	Jan.	11, 1946	28.52	Sept.	28	30.65
Jan.	26, 1939	39.90	May	27	28.56	Dec.	4	27.87
Mar.	4	39.73	July	10	28.65	Feb.	4, 1955	29.93
May	24	31.01	Sept.	20	28.96	June	16	30.38
Aug.	3	30.92	Dec.	6	28.45	Sept.	20	30.50
Sept.	25	31.55	Jan.	31, 1947	28.04	Dec.	21	30.29
Dec.	19	31.38	Mar.	17	27.96	Feb.	14, 1956	30.15
Feb.	15, 1940	30.44	June	4	27.92	June	13	30.85
May	1	29.52	Sept.	18	28.08	Sept.	21	30.72
June	28	31.64	Dec.	18	27.76	Dec.	10 1057	30.77
Aug.	25	31.96	Feb.	18, 1948	27.66	Feb.	19, 1957	30.89
Oct.	4	31.78	June	16	28.14	June	13	39.92
Dec.	5	30.62				Sept.	13	31.05

## Table 9.—Water Levels in Montgomery and Adjacent Counties—Continued (Depth to water in feet below land surface)

D	ATE	WATER LEVEL		DATE	WATER LEVEL	D	ATE	WATER LEVEL
Well 7	rs-60-53-504-	-Continued	Feb.	20, 1962	56.90	Aug.	29, 1966	96.28
Dec.	12, 1957	30.75	Mar.	1, 1963	58.94	Feb.	14, 1967	95.44
Feb.	20, 1958	30.49	Mar.	4, 1964	60.75		Waller Coun	
June	10	30.85	Feb.	10, 1965	62.64		Well YW-60-58	
Sept.	17	Well	Feb.	9, 1966	63.85			
		destroyed	Feb.	15, 1967	65.82		er: Cameron Ir	
	Harris Cour	ntv				Dec.	11, 1959	88.00
				Well LJ-60-61-	504	June	30, 1965	93.24
	Well LJ-60-60	-103	Ow	ner: I, and G, N	N. R. R.	Feb.	3, 1966	89.18
Owner	r: City of Tom	ball, Well 3						
	1958	64.00	Oct.	1931	Flows 80.41			
Feb.	23, 1961	56.43	000					

## Table 10.--Chemical Analyses of Water From Wells in Montgomery and Adjacent Counties (Analyses given are in milligrams per liter, except sodium adsorption ratio, residual sodium carbonate, specific conductance, and pH)

WELL	DEPTH OF WELL (FT)		TE OF LECTION	SILICA (SiO <sub>2</sub> )	IRON (Fe)	CAL - CIUM (Ca)	MAGNE - SIUM (Mg)	SODIUM (Na)	POTAS - SIUM (K)	BICAR - BONATE (HCO <sub>3</sub> )	SUL- FATE (SO <sub>4</sub> )	CHLO- RIDE (C1)	FLUO- RIDE (F)	NITRATE (NO <sub>3</sub> )	BORON (B)	DIS- SOLVED SOLIDS	HARD - NESS AS CaCO <sub>3</sub>	SODIUM - ADSORP - TION RATIO (SAR)	RESIDUAL SODIUM CARBONATE (RSC)	SPECIFIC CONDUCTANCE (MICROMHOS AT 25°C)	
									Montgon	mery Cour	ity										
rs-60-27-802	180	Apr.	29, 1967	42	0.16	82	5.6	29	3.9	222	26	62	0.0	0.0		360	228	0.8	0.00	584	7.1
28-901	109	June	27, 1966	31	.39	45	31	40	2.4	188	8.4	119	.3	.5		370	240	1,1	.00	700	6.6
34 <b>-</b> 502	225	Apr.	29, 1967	37	.25	94	4.6	32	3.5	262	19	64	.2	.0		384	254	.9	•00	628	7.4
602	400	Oct.	9, 1942							220	12	60	.3	.0							
35 <b>-</b> 701	725	Oct.	31, 1966	48	•45	72	3.5	42	5.3	276	17	33	.3	.0		357	194	1.3	•64	558	7.5
804	230	Apr.	11, 1944	25	.05	126	7.6	20	6.4	403	4.9	42	.6	•2		433	346	.5	-24	717	7.0
805	566	June	23, 1942			47	6.3	* 55		250	12	31	•4	1.0		276	144				
806	180	Oct.	9, 1942							348	5.0	44									
808	586	Oct.	31, 1966	45	.20	69	6.3	41	4.8	276	23	28	.2	.0	0.06	353	198	1.3	•56	555	7.6
36-302	465	Sept.	24, 1942			63	6.3	* 45		311	8.0	13	.0	.0		288	184				-
404	462	Nov.	8, 1966	41	.00	62	4.5	37	4.8	252	16	28	.3	.2		318	173	1.2	.67	512	7.
37-102	54	Oct.	9, 1942			7.2	3.4	* 18		73	5.0	2.0	.6	3.0		75	32	100		1	-
105	154	Aug.	9, 1966	23	.07	130	4.0	26	1.4	376	6.8	64	.7	2.5		443	341	.6	.00	787	7.
302	60	Oct.	9, 1942			7.6	4.6	* .9		24	2.0	12		1.0		40	38		1		-
304	362	Aug.	9, 1966	33	.03	106	5.7	31	2.2	344	7.2	50	.4	.0	.01	405	288	.8	.00	694	7.
306	473	June	27, 1966	39	.06	126	6.2	27	3.0	356	8.2	78	.3	.0		463	340	.6	.00	768	7.
401	365	June	3, 1942			72	16	* 41		262	23	65	.8	1.0		348	245			11	-
402	912	Mar.	8, 1951	15	.3	55	7.4	* 44		281	12	15				462					7.
403	903	Mar.	9, 1956	14	•4	48	10	* 48		277	13	18				425	161			465	7.
405	355	Aug.	15, 1966	29		117	6.0	25	2.5	342	9.6	66	.4	.2		424	316	.6	.00	738	7.
408	300	Oct.	9, 1942							305	4.0	72	.2								-
602	36	June	30, 1966	16	.02	2.0	1.7	4.3	.0	7	2.4	7.0	.1	2.8		39	12	.5	.00	54	5.
707	75	July	9, 1967	15		4.2	1.8	9.0	.7	7	•4	13	.1	17		64	18	.9	.00	96	5.
42-303	578	Oct.	9, 1942			62	4.6	* 83		342	11	44	.2	.0		373	173				-
304	640	June	23, 1942			19	5.1	* 89		220	18	44	.0	.5		284	68				-

Table 10. -- Chemical Analyses of Water From Wells in Montgomery and Adjacent Counties -- Continued

WELL	DEPTH OF WELL (FT)	DATE OF COLLECTION	SILICA (SiO <sub>2</sub> )	IRON (Fe)	CAL- CIUM (Ca)	MAGNE - SIUM (Mg)	SODIUM (Na)	POTAS - SIUM (K)	BICAR- BONATE (HCO <sub>3</sub> )	SUL - FATE (SO <sub>4</sub> )	CHLO- RIDE (C1)	FLUO- RIDE (F)	NITRATE (NO <sub>3</sub> )	BORON (B)	DIS- SOLVED SOLIDS	HARD - NESS AS CaCO <sub>3</sub>	SODIUM - ADSORP - TION RATIO (SAR)	RESIDUAL SODIUM CARBONATE (RSC)	SPECIFIC GONDUCTANCE (MICROMHOS AT 25°C)	рН
TS-60-42-306	2,400	Dec. 28, 1966	32	0.94	28	1.4	334	14	708	13	158	0.7	0.0		929	76	17	10.1	1,570	7.4
43-201	682	June 23, 1942			62	6.1	* 63		305	26	27		2.0		336	179				
801	100	Dec. 9, 1966	32	.00	50	4.2	16	2.3	176	3.2	20	.1	.0		215	142	.6	•04	349	7.0
44-302	422	Oct. 17, 1966	24	.16	62	16	44	4.9	336	14	26	.3	.2		356	220	1.3	1.10	599	7.4
403	22	Oct. 9, 1942			3.2	3.4	* 12		31	3.0	7.0		13.0		57	22				
501	546	Sept. 24, 1942							342	17	27		.0							
502	200	Oct. 9, 1942			19	2.2	* 18		85	2.0	16		.0		99	56				
601	428	Sept. 25, 1942			26	7.3	* 80		268	26	13		3.0		287	95				
602	784	June 25, 1942			36	8.8	* 77		262	30	30	.0	4.0		315	125				
45-105	1,103	July 23, 1964	18	.32	47	5.0	* 69		285	29					473	140				7.5
107	21	Apr. 11, 1944							253		43									
203	95	July 5, 1966	18	3.3	3.5	1.8	9.9	.2	14	.0	18	.1	.8		59	16	1.1	.00	97	5.
401	1,100	June 4, 1942			39	6.3	* 95		287	30	45	.4	1.0		358	124				
402	1,393	July 30, 1966	25	.05	42	7.0	* 88		293	26	40				518	132			606	8.
403	887	Sept. 24, 1942			36	7.5	* 89		287	19	41	.1	1.0		335	120				
407	511	Oct. 23, 1966	23	.42	60	16	51	4.6	324	13	41	.3	.0		368	216	1.5	1,00	632	7.
501	1,280	June 23, 1960	26	.57	39	7.8	81	7.3	278	24	45	.2	.0	0.06	367	130	3.1		600	7.
503	1,332	July 5, 1966	28	.20	35	5.8	88	5.9	286	25	39	.2	.2	.06	368	112	3.6	2.46	620	7.
504	1,221	Apr. 11, 1944	26	2.7	40	7.4	81	7.8	278	22	46	.2	1.0		369	130			613	7.
505	1,464									5.0	30					35				
507	1,280	June 1958		2.0	36	8.0	* 84		223	31	50	.3	.4		345	122			575	7.
510	220	June 3, 1942			25	2.4	* 25		85	9.0	31	.8	1.0		136	72				
511	205	4							35	3.0	5.0									
605	168	Dec. 2, 1966	18	.09	8.0	2.0	* 15		38	2.0	20				113	28			131	5.
606	1,120	Oct. 24, 1966	27	.38	25	3.3	92	4.3	276	17	28	.3	.0		333	76	4.6	3.00	540	7.
608	1,100	Sept. 17, 1966	6.0	.15	20	2.7	* 100		270	16	27				463	61			525	7.

Table 10.--Chemical Analyses of Water From Wells in Montgomery and Adjacent Counties--Continued

WELL	DEPTH OF WELL (FT)	DATE OF COLLECTION	SILICA (SiO <sub>2</sub> )		CAL - CIUM (Ca)	MAGNE - SIUM (Mg)	SODIUM (Na)	POTAS - SIUM (K)	BICAR - BONATE (HCO <sub>3</sub> )	SUL - FATE (SO <sub>4</sub> )	CHLO- RIDE (C1)	FLUO- RIDE (F)	NITRATE (NO <sub>3</sub> )	BORON (B)	DIS- SOLVED SOLIDS	HARD - NESS AS CaCO <sub>3</sub>	SODIUM - ADSORP - TION RATIO (SAR)	RESIDUAL SODIUM CARBONATE (RSC)	SPECIFIC CONDUCTANCE (MICROMHOS AT 25°C)	E pl
TS-60-45-609	164	Oct. 9, 1942			5.2	3.4	* 16		43	2.0	18		0.0		66	27				
611	715	June 4, 1942			77	14	* 52		354	26	27	0.4	4.0		374	248			//	
702	660	Sept. 23, 1942							342	13	17		.0							
/06	136	Oct. 9, 1942			9.2	3.4	* 40		79	5.0	39		.0		136	37				
801	33	June 3, 1931								15	80					140				
805	702	Aug. 9, 1966	21	0.04	38	8.8	86	3.3	344	15	17	.3	.0	0.08	359	131	3.3	3.02	599	7.
903	360	June 4, 1942			19	6.3	* 23		85	3.0	34	.4	3.0		131	74				
905	111	July 9, 1967	29	.00	92	12	96	2.5	21	10	325	.1	18	.17	595	279	2.5	.00	1,150	6.4
46-101	525	July 6, 1966	26	.06	81	14	45	3.6	325	12	56	.3	.2	.02	399	261	1.2	.11	690	7.
503	263	July 14, 1966	21	.09	20	4.4	15	2.3	125	2.4	10	.1	.0		137	68	.8	.68	236	6.
706	628	June 4, 1942			24	8.8	* 110		342	26	18	•4	.0	.04	355	95				
47-102	28	May 26, 1966	17	.00	3.5	.9	8.5	.4	18	.6	11	.1	.5	.04	52	12	1.1	.05	77	5.
501	180	May 25, 1966	26	.04	15	1.8	15	3.0	60	.8	23	.2	.0	.04	115	45	1.0	.09	180	6.
605	1,191	Apr. 11, 1944							253		43					30				
613	170	July 9, 1967	23		15	1.9	10	2.5	60	.6	14	.1	.2		97	45	.6	.08	145	6.
50-302	1,452	Dec. 15, 1966	21	.12	9.0	1.1	198	3.7	440	24	58	.9	.0	.29	532	27	17	.67	890	7.
51-301	210	Dec. 6, 1966	26	.14	6.2	1.3	13	1.8	29	.4	18	.1	.0		81	21	1.2	.06	118	6.
403	282	Oct. 9, 1942			6.8	2.2	* 36		61	2.0	37	.7	.0		114	26				
505	650	Dec. 8, 1966	21	.32	50	13	88	5.2	360	26	36	.3	.0		416	178	2.9	2.33	695	7.
901	147	Oct. 9, 1942			4.8	17	* 48		159	3.0	37		.0		188	80				
52-101	768	Oct. 1943	3	.10	40	12	* 99		339	26	43		.0		387	150				
102	213	do		.43	29	9.3	* 112		299	27	57		.0		382	110				
104	786	Nov. 5, 1942			34	7.0	* 120		322	20	62				625	115			1	
703	138	May 17, 1966	38		13	2.2	17	2.1		3.2	23	.2	25	.05	144	42	1.1	.00	212	6.
53-201	385	Sept. 20, 1966	19	1.8	37	6.7	48	2.9	229	9.6	19	.4	.0	.04	256	120	1.9	1.36	441	7.
302	195	July 9, 1967	25	.00	332	39	136	5.8	59	3.2	890	.1	1.8	.04	1,460	989	1.9	.00	2,860	6.

Table 10. -- Chemical Analyses of Water From Wells in Montgomery and Adjacent Counties -- Continued

WELL	DEPTH OF WELL (FT)		TE OF LECTION	SIL:			CAL- CIUM (Ca)	MAGNE - SIUM (Mg)	SODIUM (Na)	POTAS - SIUM (K)	BICAR - BONATE (HCO <sub>3</sub> )	SUL - FATE (SO <sub>4</sub> )	CHLO- RIDE (C1)	FLUO- RIDE (F)	NITRATE (NO <sub>3</sub> )		DIS- SOLVED SOLIDS	HARD - NESS AS CaCO <sub>3</sub>	SODIUM - ADSORP - TION RATIO (SAR)	RESIDUAL SODIUM CARBONATE (RSC)	SPECIFIC CONDUCTANCE (MICROMHOS AT 25°C)	3 1
rs-60-53-303	648	June	6, 19	42 -			37	12	* 88		360	12	18	0.0	2.0		346	143				-
304	225	Oct.	9, 19	42 -							220	3.0	32		.0							-
307	392	June	4, 19	42 -			21	4.9	* 29		110	2.0	31		.0		142	73				-
309	518	Oct.	9, 19	42 -			14	8.3	* 103		293	2.0	36		.0		307	70				-
310	20	July	9, 19	57 20			4.5	3.0	7.3	0.8	8	7.2	9.2	.1	16		72	24	0.6	0.00	100	5
311	148		do	29	0	0.00	598	96	522	7.7	29	10	2,140	.1		0.29	3,420	1,890	5.2	.00	6,350	6
402	460	Aug.	19, 19	56 -							188	6.4	47					172		.00	465	7
403	600		do	19			38	6.6	45	2.5	200	9.8	34	.3	•2		253	122	1.8	.84	445	7
501	1,720	Aug.	25, 19	56 16			34	7.8	63	2.9	224	8.0	45	.6	.0		287	117	2.5	1.33	508	7
502	1,800	Aug.	19, 19	56 19		.02	4.5	•3	143	1.6	304	17	44	.6	.2	.00	379	12	18	4.74	643	8
503	21	June	2, 19	31							40	30	30									-
508	250	Aug.	25, 19	56							188	6.4	50					174		.00	476	7
603	340	Aug.	19, 19	56 31		.01	57	4.4	30	2.4	188	6.4	51	.2	.2		275	160	1.0	.00	474	7
704	508	Aug.	26, 19	66 31		.19	59	3.2	24	2.4	183	5.2	43	.2	.0		258	160	.8	٥٥٥ .	441	7
706	173	June	2, 19	31							100	40	10									ŀ
805	236	Aug.	24, 19	66							186	7.0	56					176		.00	488	1
806	825	June	2, 19	31							100	65	10									
808	239	Aug.	25, 19	66							178	6.4	47					170		.00	454	
809	247		do								172	7.2	50					168		.00	457	1
54 <b>-</b> 201	120	Oct.	9, 19	2			20	5.8	* 23		48	2.0	29	.2			128	74		11	12.	
305	39	Mar.	8, 19	3 24			15	.9	* 14		64	4.3	9.0		2.5			41	1.0		144	e
55 <b>-</b> 204	296	May	27, 19	66 36		.00	81	3.8	15	3.1	230	.4	41	.1	.0	.02	293	218	•4	.00	488	7
301	130	Sept.	25, 19	2			8.8	5.1	* 25		55	3.0	35	.1	.0		104	43				
308	327	July	9, 19	7 35			67	2.5	14	2.8	208	.4	29	.1	.2		253	177	•5	.00	410	
502	1,287	Aug.	8, 19	6 16		.15	8.0	.7	140	1.4	306	16	45	.7	.0	.19	378	23	13	4.56	646	8
505	640	June	5, 19	.2			42	2.7	* 20		165	4.0	14		1.5		165	117				

Table 10. -- Chemical Analyses of Water From Wells in Montgomery and Adjacent Counties -- Continued

TS-60-55-507 701 61-201 206 304 62-302 63-105	932 250 400 455 198 331 393	Sept. Aug. Aug.	15, 1966 25, 1942 26, 1966  26, 1966 29, 1967	30 36	0.05	19 46 51	4.5 3.9 4.6	105 * 21	2.0	260	16	48	0.6	0.0						
61-201 206 304 62-302	400 455 198 331	Aug. Aug.	26, 1966  26, 1966	30  36	0.05	51						E0000000000000000000000000000000000000	1	0.2	 338	66	5.6	2.94	582	7.
206 304 62-302	455 198 331	Aug.	26, 1966	36			4.6			171	3.0	25	.0	.0	 183	132		I		
304 62-302	198 331	Apr.	26, 1966	36				33	2.7	183	7.2	46	.2	.2	 265	146	1.2	.08	452	7
62-302	331	Apr.			.51					150	60	10			 					-
			29, 1967	31		15	2.2	23	1.6	60	.2	34	.2	.2	 142	46	1.5	.54	231	6
63-105	393	Ton		Business and business	.04	56	5,2	22	1.8	189	11	34	.0	.2	 254	161	.8	.00	413	7
		Jan.	12, 1967	30	.01	60	5.0	18	2.3	194	9.8	31	.2	.2	 252	170	.6	.00	410	7
									Gr Ime	s Count	y					10051				
KW-60-18-701	160	Dec.	17, 1942			56	5.8	* 81		79	107	116	•2	.0	 405	164				T
26-205	32	Dec.	16, 1942			11	1.9	* 4.8		31	5.0	11	•4	.0	 49	36			4457	
701	720	Jan.	6, 1967	49	.00	60	1.7	160	23	253	64	180	.5	3.2	 665	156	5.6	1.02	1,100	
702	192	Dec.	16, 1942			51	8.0	* 52		171	29	73		.0	 297	160				
703	450		do			77	1.9	* 100		299	54	82	.2	.0	 462	201				
704	160	American Landania	do							268	16	59		.0	 					-
706	65	Dec.	4, 1942			72	4.6	* 175		397	18	166		.0	 631	198		1	1	١.
34-101	21	Dec.	3, 1942			48	8.3	* 87		171	15	128	.3	8.2	 379	155				-
801	54	Dec.	2, 1942			101	9.5	* 56		415	14	38		7.0	 430	291				-
42-101	200	Nov.	27, 1942			106	4.6	* 64		372	7.0	78		.0	 443	283	14-			-
103	151	Dec.	2, 1942			99	11	* 69		360	43	72	.3	.0	 471	292				-
502	33	Nov.	27, 1942			19	2.2	* 51		92	3.0	23		70	 213	56				-
702	130		do			150	13	* 88		329	11	240		.0	 664	428				-
801	35		do			16	5.8	* 55		98	3.0	70		3.0	 201	64				-
									Harri	s County	7									
LJ-60-60-103	412	July	16, 1957	16	•3	55	4.0	* 40		210	2.0	46			 341	154	1,4			7
103	412	Apr.	1964		•05	46	3.0	* 28		140	9.0	28	.0		 315	130				7
61-502	365	Mar.	2, 1961							736 1/		340			 	17				8

Table 10. -- Chemical Analyses of Water From Wells in Montgomery and Adjacent Counties -- Continued

Hd	1	1		8.0	7.7	8.0	8.2	1	1	1	0.9	7.9		5.0	7.1	5,5	6.1	6.1		1	1	7.3	1	1	1	
SPECIFIC CONDUCTANCE (MICROMHOS AI 25°C)	1	2,270		584	266	1	734	1	1	:	102	632		777	783	76	170	130		:	1	483	1	1	1	
RES IDUAL SOD IUM CARBONATE (RSC)	1			3,87	3,07	;	5.57	00.	.07	00.	1	4.03		00.	00.	• 02	.24	.20		;	1	1.11	1	1	1	
SODIUM - ADSORP - TION RATIO (SAR)	1	:		12	ŀ	:	23	4.	2,	1.0	;	:		7.	1.6	1.5	1.0	6.		1	:	1.4	:	1	:	
HARD - NESS AS CaCO <sub>3</sub>	79	40		22	104	108	10	182	192	131	17	10		00	258	10	47	37		258	282	191	178	190	24	41
DIS- SOLVED SOLIDS	344	1,300		:	;	390	435	238	265	268	;	:		36	441	51	100	78		453	580	313	346	330	73	
BORON (B)	1	:		0.22	1	:	.39	1	!	1	;	1		:	1	1	1	1		1	1	;	:	1	1	
NITRATE (NO3)	0.1	•.2		.2	;	4.	0.	0.	.2	33	2.2	1		2.8	0.	•.2	•.2	0.		0.	198	•.2	•2	.2	16	
FLUO- 1 RIDE (F)	1	:		8.0	:	٤,	1.4	1	;	:	;	:		1	٤,	•.2	•1	1		;	1	.1	1	;	1	
CHLO- RIDE (C1)	32	370		52	20	36	09	16	21	47	18	09		9.9	103	15	16	8.6		77	108	16	99	83	0.6	
SUL- FATE (SO <sub>4</sub> )	11	3.0		15	:	22	4°9	3.0	3.0	10	ï	14	lty	4.	21	4.	4.	1.4		37	26	20	16	19	3.0	
BICAR- BONATE (HCO <sub>3</sub> )	325	762 24	Liberty County	263	314	255	352	222	239	104	9	258	ito Cour	9	284	14	72	57	County	226	02	264	180	160	20	
POTAS - SIUM (K)	;	:	Liberty	1.5	:	1	1.3	:	:	:	ŧ	:	San Jacinto County	9.	9.4	9.	:	:	Walker	:	ŀ	5,3	:	;	;	
SOD IUM (Na)	* 119	* 511		131	:	* 102	168	* 12	* 17	* 27	1	1	031	4.4	09	111	* 16	* 12		* 33	* 53	42	* 36	* 36	* 9°7	
MAGNE- SIUM (Mg)	5.9	3.5		9.	;	14	9.	3,1	14	7.5	:	:		6.	16	1.2	1.7	1.7		8.1	12	4.0	2.8	6.2	3.9	
CAL- CIUM (Ca)	16	10		7.8	;	20	30	89	11	40	;	:		1.8	77	2.1	16	12		06	93	58	19	99	3.2	
IRON (Fe)	0.05	!		90.	;	5	•12	1	1	;	.37	1		.07	00.	.86	42	12		1	1	1	1	1	1	
SILICA (SiO <sub>2</sub> )	:	31		19	1	i	21	1	1	1	ł	;		15	19	13	15	:		94	18	37	777	39	9.2	
DATE OF SOLLECTION	31, 1935	19, 1948		7, 1955	4, 1965	1955	10, 1966	6, 1945	op	6, 1945	13, 1965	7, 1966		30, 1966	31, 1966	op	5, 1965	14, 1965		21, 1948	15, 1948	29, 1967	7, 1948	op	op	
DAT	Mar.	Mar.		Dec.	Aug.	Jan.	Jan.	Apr.		Apr.	Dec.	Dec.		Mar.	Mar.		Oct.	Oct.		July	May	Apr.	May			
DEPTH OF WELL (FT)	1,070	860		1,337	845	833	1,610	327	187	18	25	1,394		99	429	83	190	120		120	30	185	190	180	30	
WELL	1,7-60-61-504	06 -305		SB-60-48-101	102	103	202	401	405	404	405	702		WU-60-30-702	810	38-901	47-302	403		YU-60-27-601	28-401	702	29-705	803	902	

See footnotes at end of table.

Table 10.--Chemical Analyses of Water From Wells in Montgomery and Adjacent Counties--Continued

WELL	DEPTH OF WELL (FT)	DATE OF COLLECTION	SILICA (SiO <sub>2</sub> )	IRON (Fe)	CAL- CIUM (Ca)	MAGNE - SIUM (Mg)	SODIUM (Na)		BICAR- BONATE (HCO <sub>3</sub> )	SUL - FATE (SO <sub>4</sub> )	CHLO- RIDE (C1)	FLUO- RIDE (F)	NITRATE (NO <sub>3</sub> )	(B)	DIS - SOLVED	HARD - NESS AS CaCO <sub>3</sub>	SODIUM - ADSORP - TION RATIO (SAR)		SPECIFIC CONDUCTANCE (MICROMHOS AT 25°C)	рН
	Waller County																			
YW-60-50-202	236	Dec. 15, 1966	34	0.01	72	6.3	36	2.4	222	8.4	66	0.2	0.0		334	206	1.1	0.00	573	7.2
703	94	Feb. 3, 1966	43	.03	12	3.9	57	1.0	63	12	76	.3	.2	0.02	236	46	3.7	.11	392	6.2
58-105	715	June 29, 1965	25		48	4.0	* 32		176	6.8	38	.3	.2		241	136	1.2	.16	415	7.2
203	300	June 11, 1949	44		35	4.5	* 36		131	5.4	50		•5		247	106			384	7.5

<sup>\*</sup> Sodium and potassium calculated as sodium (Na). 1/ Includes 37 mg/l carbonate (CO<sub>3</sub>). 2/ Includes 14 mg/l carbonate (CO<sub>3</sub>).

Table 11.--Field Analyses of Water From Wells in Montgomery and Adjacent Counties

	WELL	A	DATE OF ANALYSIS	рН	SPECIFIC CONDUCTANCE (MICROMHOS AT 25°C)	CAS ING MATERIAL	SCREEN MATERIAL	REMARKS
					<u>Mo</u>	ntgomery County		
<u>a</u> / TS∙	-60-28-901	June	27, 1966	6.4	725	Steel	Stee1	Reported iron problem. Iron conductor pipe pulled and found corroded. Clear water sample turned red in about 5 hours after sampling.
	29-701		do	6.9	450	Concrete		Reported hardness problem. Uses special soap to lather. Water not used for cooking. Water has offensive taste.
- 15	801	June	28, 1966		740	Steel	Steel	Reported no iron problem.
	903	June	27, 1966	7.4	650	do	do	Reported hardness problem.
<u>a</u> j	36-302		do	7.8	425	do	do	Reported no iron problem.
	303	July	27, 1966	7.1		do	do	Do.
	405	Nov.	3, 1966	6.3	350	Concrete	18	Reported iron problem. Observed corrosion on plumbing fixtures and iron discoloration on ceramics.
<u>a</u> /	37-102	June	27, 1966	5.9	130	Rock		Reported iron problem when plumb- ing fixtures were iron. Installa- tion of plastic and copper fix- tures ended problem. Conductor pipe is plastic.
	201	June	28, 1966		700	Concrete		Reported no iron problem.
	308	June	27, 1966	5.2	75	Plastic	Plastic	Reported occasional iron problem. Observed corroded plumbing fix- tures.
	406	June	28, 1966	7.2	550	Stee1	Stee1	Reported hardness problem. Uses special soap to lather.

Table 11. -- Field Analyses of Water From Wells in Montgomery and Adjacent Counties -- Continued

WELL	DATE OF ANALYSIS	рН	SPECIFIC CONDUCTANCE (MICROMHOS AT 25°C)	CASING MATERIAL	SCREEN MATERIAL	REMARKS
60-37-501	June 28, 19	966 5.7	42	Steel	Stee1	Reported soft water. Reported no iron problem. Observed no corrosion in well or in distribution system.
504	Aug. 28, 19	966 5.3	145	Plastic		Reported iron problem when casing was iron. Formerly replaced iron casing yearly because of corrosion Substitution of plastic casing ended iron problem.
602	June 30, 19	5.6		Concrete		Reported iron problem. "Water gets rusty during heavy rain."
901	June 28, 19	966	310	Stee1	Stee1	Reported no iron problem.
902	June 21, 19	966	390	do	do	Do.
903	June 28, 19	966	130	Concrete		Do.
38-401	July 8, 19	966 5.7	52	do		Reported no iron problem. Water distribution system is plastic.
506	do	6.7	75	do		Reported iron problem when well is first turned on.
701	do	5.6	68	Plastic		Reported no iron problem.
44-602	July 1, 19	966	590	Stee1	Stee1	Do.
803	Nov. 28, 19	966	210	do	do	Observed corrosion on casing.
45 <b>-</b> 202	July 5, 19	966 5.6	135	do	do	Reported iron problem only when well is first turned on. Reported soft water.
	60-37-501 504 602 901 902 903 38-401 506 701 44-602 803	WELL OF ANALYSIS  60-37-501 June 28, 19  504 Aug. 28, 19  602 June 30, 19  901 June 28, 19  902 June 21, 19  903 June 28, 19  38-401 July 8, 19  506 do  701 do  44-602 July 1, 19  803 Nov. 28, 19	WELL OF ANALYSIS PH  ANALYSIS PH  60-37-501 June 28, 1966 5.7  504 Aug. 28, 1966 5.3  602 June 30, 1966 5.6  901 June 28, 1966  902 June 21, 1966  903 June 28, 1966  38-401 July 8, 1966 5.7  506 do 6.7  701 do 5.6  44-602 July 1, 1966  803 Nov. 28, 1966	WELL OF ANALYSIS PH CONDUCTANCE (MICROMHOS AT 25° C)  60-37-501 June 28, 1966 5.7 42  504 Aug. 28, 1966 5.3 145  602 June 30, 1966 5.6  901 June 28, 1966 310  902 June 21, 1966 390  903 June 28, 1966 130  38-401 July 8, 1966 5.7 52  506 do 6.7 75  701 do 5.6 68  44-602 July 1, 1966 590  803 Nov. 28, 1966 210	WELL OF ANALYSIS PH CONDUCTANCE (MICROMHOS AT 25°C)  60-37-501 June 28, 1966 5.7 42 Steel  504 Aug. 28, 1966 5.3 145 Plastic  602 June 30, 1966 5.6 Concrete  901 June 28, 1966 310 Steel  902 June 21, 1966 390 do  903 June 28, 1966 130 Concrete  38-401 July 8, 1966 5.7 52 do  506 do 6.7 75 do  701 do 5.6 68 Plastic  44-602 July 1, 1966 590 Steel  803 Nov. 28, 1966 210 do	WELL OF ANALYSIS PH CONDUCTANCE (MICROMHOS AT 25° C)  60-37-501 June 28, 1966 5.7 42 Steel Steel  504 Aug. 28, 1966 5.3 145 Plastic  602 June 30, 1966 5.6 Concrete  901 June 28, 1966 310 Steel Steel  902 June 21, 1966 390 do do do  903 June 28, 1966 130 Concrete  38-401 July 8, 1966 5.7 52 do  506 do 6.7 75 do  701 do 5.6 68 Plastic  44-602 July 1, 1966 590 Steel Steel  803 Nov. 28, 1966 210 do do

Table 11. -- Field Analyses of Water From Wells in Montgomery and Adjacent Counties -- Continued

WELL	DATE OF ANALYSIS	pН	SPECIFIC CONDUCTANCE (MICROMHOS AT 25°C)	CASING MATERIAL	SCREEN MATERIAL	REMARKS
<u>a</u> / TS-60-45-203	July 5, 1966	5.3	120	Plastic	Plastic	Reported iron problem developed a few months after well was completed. Iron problem diminishes with increased water usage. Observed rust stains on enamel of sinks and tubs. Water distribution system is iron.
602	Oct. 24, 1966		80	Steel	Stee1	Reported iron problem developed 15 to 18 months after well was completed. Air compressor "knocks out the iron."
802	June 17, 1966	6.5	200	Concrete		Reported no iron problem. "Water occasionally blue." Water distribution system is copper.
<u>의</u> 46-101	July 6, 1966	7.3	625	Stee1	Stee1	Reported no iron problem. Water distribution system is plastic.
201	do		65	do	do	Reported iron problem when well pumps only occasionally.
203	July 12, 1966	5.7	180	Concrete		Reported iron problem. Reported iron deposition in water heater. Water distribution system is iron.
301	July 6, 1966	5.9	145	Wood	-	Reported no iron problem. Conductor pipe is plastic.
404	do ·		195	Stee1	Steel	Reported iron problem.
405	July 13, 1966	6.6	290	Concrete		Reported no iron problem.
601	July 6, 1966		115	do		Reported iron problem. Water distribution system is iron. Conductor pipe is plastic.

Table 11. -- Field Analyses of Water From Wells in Montgomery and Adjacent Counties -- Continued

WELL	DATE OF ANALYSIS	pН	SPECIFIC CONDUCTANCE (MICROMHOS AT 25°C)	CAS ING MATER IAL	SCREEN MATERIAL	REMARKS
TS-60-46-602	July 6, 1966		110	Plastic	Plastic	Reported iron and hardness prob- lems. Water distribution system is iron and is reportedly corroded.
603	July 12, 1966	6.5	175	Concrete	-	Reported iron problem. Conductor pipe is plastic.
703	July 13, 1966		290	Stee1	Stee1	Reported iron problem. Water distribution system is iron.
803	July 12, 1966		150	do	do	Reported no iron problem. Well pumped with air compressor. Water treated with filter.
<u>a</u> 47 <b>-</b> 102	May 26, 1966	5.7		Concrete		Reported occasional iron problem. Reported soft water.
407	do	6.2		do		Reported no iron problem. Conductor pipe is plastic.
<u>a</u> 501	May 25, 1966	6.9	22	Steel	Stee1	Reported iron problem.
503	do	6.3		do	do	Reported iron problem decreases as well is pumped.
610	May 27, 1966	7.1	<u>-</u>	do	do	Reported iron problem. Observed corrosion on casing and storage tank.
801	do	7.8		do	do	Reported no iron problem. Reported soft water.
53-203	Nov. 21, 1966		700	do	do	Reported no iron problem.
54-301	June 15, 1966	5.9	410	Concrete	-	Reported iron problem. Conductor pipe is iron.
303	do	8.2	370	Steel	Steel	Reported no iron problem.

Table 11. -- Field Analyses of Water From Wells in Montgomery and Adjacent Counties -- Continued

WELL	DATE OF ANALYSIS	рН	SPECIFIC CONDUCTANCE (MICROMHOS AT 25°C)	CASING MATERIAL	SCREEN MATERIAL	REMARKS
TS-60-54-304	June 15, 1966	6.4	180	Concrete	- 1	Reported no iron problem. Conductor pipe is plastic.
401	June 10, 1966	5.4	280	Steel		Reported iron problem. Conductor pipe is plastic.
502	do	6.9		do	Steel	Reported no iron problem.
503	June 16, 1966	7.7	540	do	do	Do.
601	do	7.5	440	do	do	Reported no iron problem. Conductor pipe is plastic.
602	do	7.4	510	Concrete		Reported no iron problem.
604	June 15, 1966	7.5	380	Stee1	Steel	Reported no iron problem. Reported hardness problem.
605	do	7.6	480	do	do	Reported iron problem in original 72-foot-deep well. Well deepened to 154 feet, and no iron problem encountered. Occasional hardness problem.
606	June 16, 1966	6.9		Wood	1	Reported no iron problem.
801	June 10, 1966	6.3		Steel	Stee1	Reported iron problem, especially when water is allowed to settle. Water distribution system is plastic.
802	do	6.7		do	do	Reported iron problem.
902	do	7.5		do	do	Reported no iron problem.
903	do	7.1	THE CONTRACTOR	do	do	Reported occasional iron problem.


Table 11. -- Field Analyses of Water From Wells in Montgomery and Adjacent Counties -- Continued


WELL	DATE OF ANALYSIS	рН	SPECIFIC CONDUCTANCE (MICROMHOS AT 25°C)	CASING MATERIAL	SCREEN MATERIAL	REMARKS
TS-60-54-904	June 10, 1966	7.2	-	Concrete	-	Reported no iron problem. Water distribution system and conductor pipe are plastic.
<u>a</u> 55-204	May 27, 1966	7.1	es	Steel	Stee1	Reported no iron or hardness prob- lems.
305	do	7.6		do	do	Reported no iron problem.
702	June 6, 1966	7.5		do	do	Do.
704	do	7.5	-	do	do	Do.
902	do	7.6		Plastic	Plastic	Reported no iron or hardness prob- lems.
903	do	7.6		Stee1	Steel	Reported no iron problem.
904	do	8.2		do	do	Do.
<u>a</u> 62-302	June 16, 1966	7.3		do	do	Reported no iron problem. Reported hardness problem.
303	June 9, 1966	7.1		Plastic	Plastic	Reported no iron problem.
63-102	June 20, 1966	6.5	240	Steel	Steel	Reported iron problem. Observed corroded pump. Water used only to wash trucks.
103	June 7, 1966	7.9	-	do	do	Reported no iron problem.
401	June 9, 1966	6.1		do	do	Reported iron problem.

Table 11. -- Field Analyses of Water From Wells in Montgomery and Adjacent Counties -- Continued

WELL	DATE OF ANALYSIS	рН	SPECIFIC CONDUCTANCE (MICROMHOS AT 25°C)	CAS ING MATERIAL	SCREEN MATERIAL	REMARKS
			San	Jacinto County		
ay WU-60-47-302	Oct. 5, 1965	6.2		Steel	Steel	Reported iron problem. Original iron casing corroded by water and replaced. "Water makes bad coffee." Water is filtered before use.
				Walker County		
YU-60-29-702	June 27, 1966	7.1	1,150	do	do	Reported "slightly hard and alkaline" water.

a/ See Table 10 for a more complete laboratory chemical analysis.

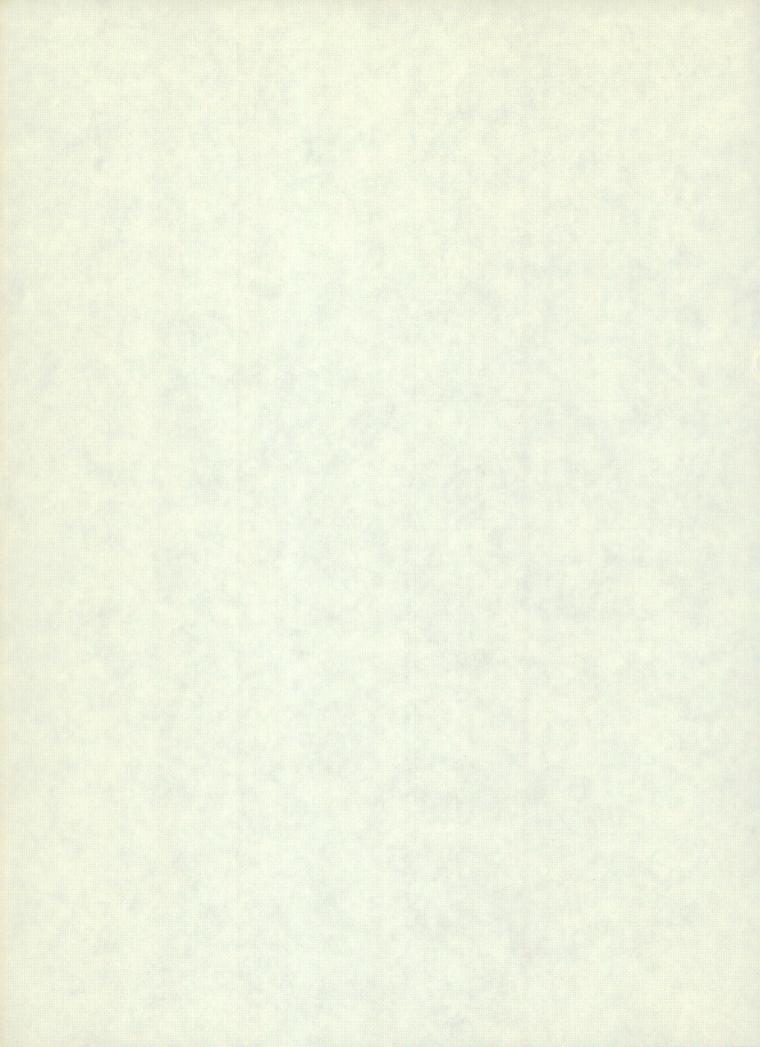

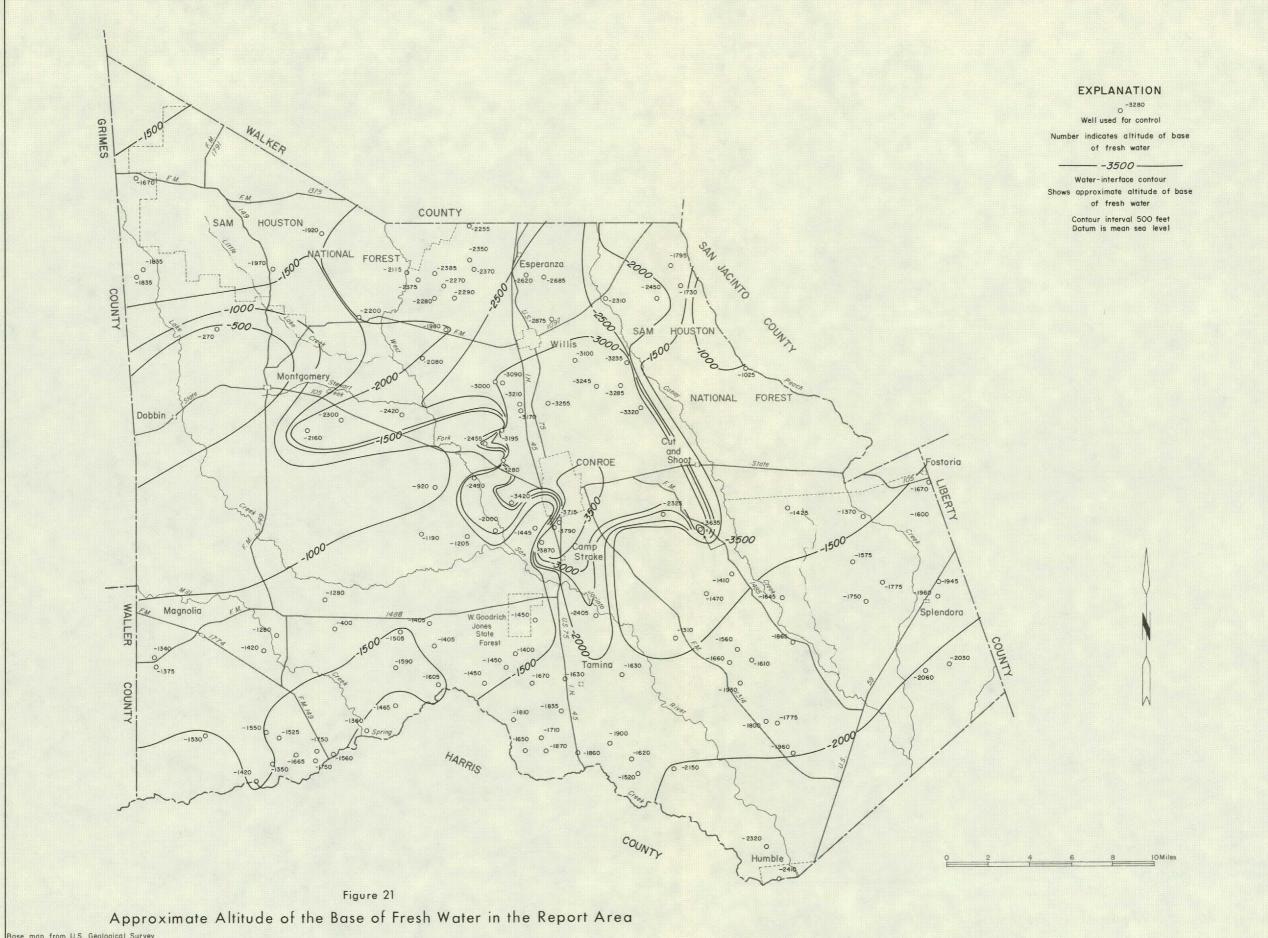

Base map from U.S. Geological Survey topographic quadrangles

